



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# ST4 SERIES

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS / SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS

Related Information

■ General terms and conditions..... F-13

■ General precautions ..... P.1501

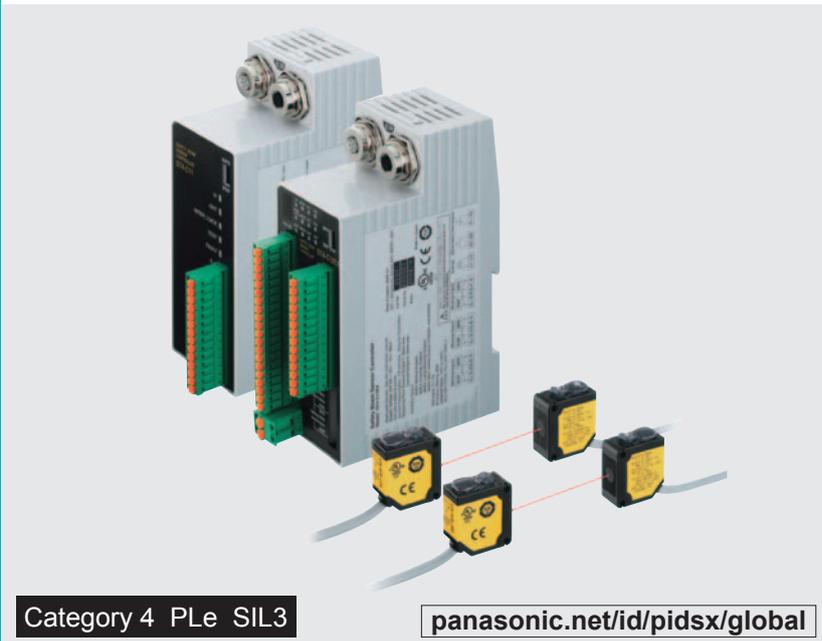

Category 4 PLe SIL3

[panasonic.net/id/pidsx/global](http://panasonic.net/id/pidsx/global)




PNP output type available

## From wide areas to narrow spaces, full support for both safety and productivity

### Long sensing range of up to 15 m 49.213 ft


Secures safety of large facilities where installation of guardian fence is difficult.

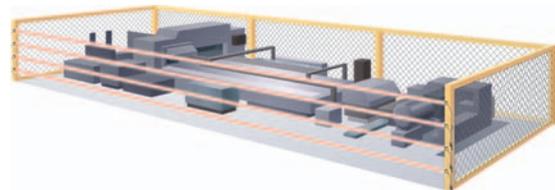

### Series connection of sensors and interference prevention

The numbers of sensor heads and controllers can be freely adjusted to meet the heights and the required numbers of the protection area.


Series connection of 6 sets of sensor heads to 1 controller.

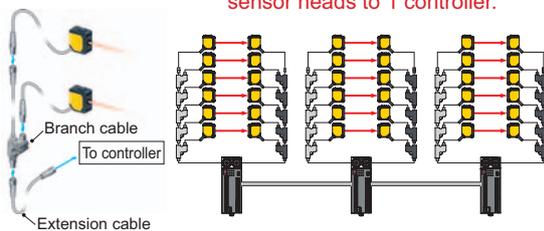

Interference prevention of 18 sets of sensor heads with a cascade connection of up to 3 controllers.

### Beam axis alignment and operation confirmation

The beam interruption indicator is incorporated in both the emitter and receiver. This indicator can be used not only for operation confirmation but also for beam axis alignment. Moreover, the stability indicator indicates if the incident light intensity exceeds 150 % in stable operation.

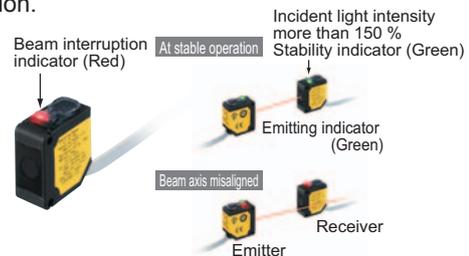


### Supports beam axis alignment at startup and quick restoration in case of trouble

### High-functional type ST4-C12EX


Light received condition of the sensor heads in series connection can be confirmed by the high-functional controller ST4-C12EX.

(Ex.) When address No.2 and 6 are misaligned in a series connection of 6 sets.

In addition, any abnormal sensors during lockout can be identified.

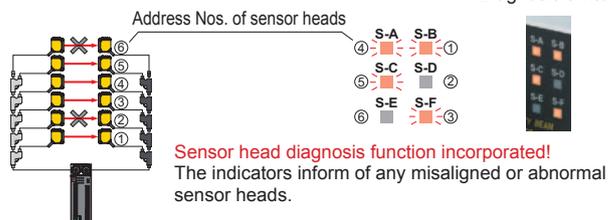


Diagnosis switch




- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SG-B1/SG-A1
- SG-B2
- SG-C1
- SG-D1
- SG-E1
- SD3-A1
- ST4

**APPLICATIONS**


Long sensing range

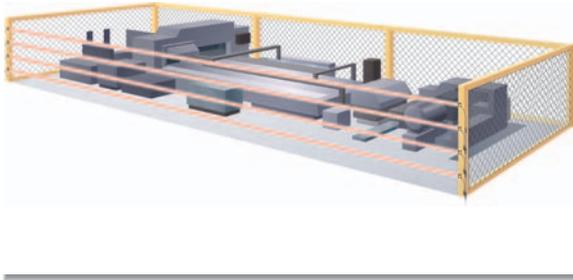

Small gap sensing

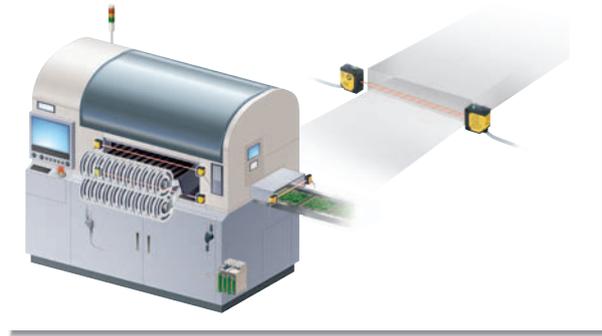**In small openings where light curtains cannot be installed**

Ensures safety in small openings that are often missed.

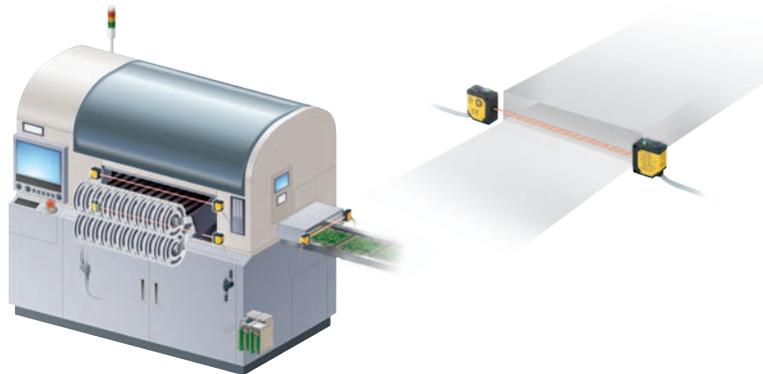**Compact sensor head saves space**


The Type 4 long sensing range type has a compact size that is equivalent to those of general-purpose photoelectric sensors.

**Protection structure IP67**

Conforming to protection structure IP67, the sensor heads can be used safely even at lines where water splashes.

**Industry standard mounting pitch**

Having the same mounting pitch as those of general-purpose photoelectric sensors makes model switchovers easy.

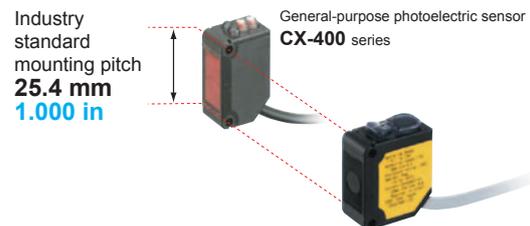**Control of interferences to surrounding sensors**

The emission amount adjuster can be used to reduce the emission to control any interference to the surrounding sensors.

FIBER  
SENSORSLASER  
SENSORSPHOTOELECTRIC  
SENSORSMICRO  
PHOTOELECTRIC  
SENSORSAREA  
SENSORSLIGHT CURTAINS /  
SAFETY  
COMPONENTSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASUREMENT  
SENSORSSTATIC ELECTRICITY  
PREVENTION  
DEVICESLASER  
MARKERS

PLC

HUMAN MACHINE  
INTERFACESENERGY CONSUMPTION  
VISUALIZATION  
COMPONENTS

FA COMPONENTS

MACHINE VISION  
SYSTEMSUV CURING  
SYSTEMSSelection  
Guide

Light Curtains

Safety  
ComponentsOptical Touch  
Switch

Control Units

Definition of  
Sensing Heights

SG-B1/SG-A1

SG-B2

SG-C1

SG-D1

SG-E1

SD3-A1

ST4

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS / SAFETY COMPONENTS**
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS

### Supports both PNP and NPN polarities

A single unit can be used for PNP / NPN output switching, reducing the number of parts that need to be registered.




General-purpose type  
**ST4-C11**

High-functional type  
**ST4-C12EX**



### Easy connector connection


Connecting to the sensor head is done using connector connections, which shortens setup and replacement time.

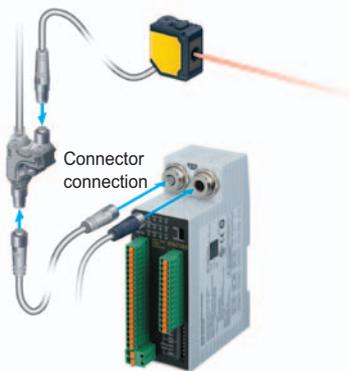

### Easy setup requiring no torque control

A spring method is used for the terminal blocks. There is no need to control tightening torques for these terminal blocks.


Uses a spring method!

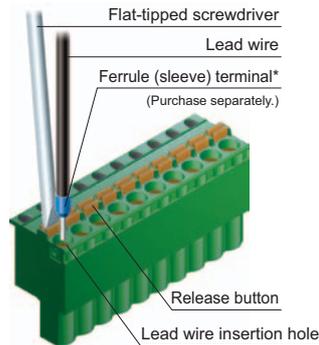

\* Connection is possible with a single wire or coil wires.

### Removal terminal blocks reduce maintenance time

The work required for reconnecting wiring during maintenance is reduced.

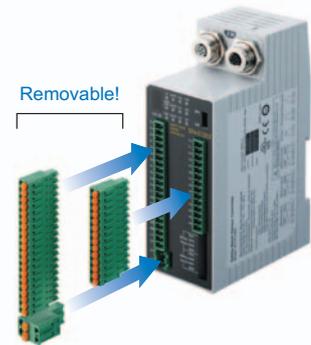

- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SG-B1/SG-A1**
- SG-B2**
- SG-C1**
- SG-D1**
- SG-E1**
- SD3-A1**
- ST4**

### Semiconductor output reduces running costs!

Semiconductor output is used for control output. This means there is no need to periodically replace safety relays.


Adoption of semiconductor output



### Error details can be understood at a glance!


High-functional type  
**ST4-C12EX**

If a problem should occur, the control output is switched OFF, and the details of the error appear on the digital display.

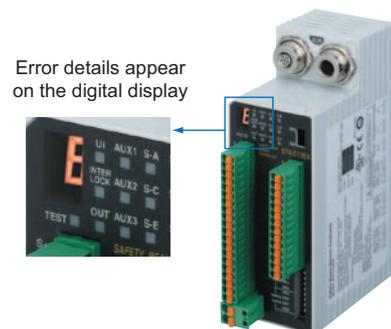

**Three patterns of muting control function for greater safety with no loss in productivity** High-functional type **ST4-C12EX**

Sensor heads, muting sensors, and muting lamps connect directly to the controller, so that muting control circuits can be built easily.

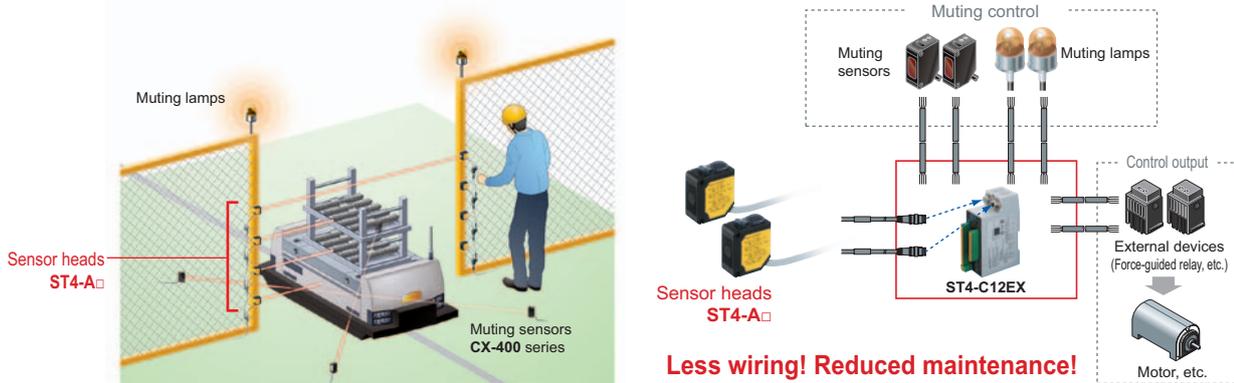


**Muting pattern No.1**

Compliant to international safety standard ISO 12643 for printing industry

Muting area can be changed to suit the printing process. This is the optimal muting control for printing machines.


- ① Put in an unfilled palette (Bottom-most muting)
- ② Sample inspect the printing paper (Top-most muting)
- ③ Take out the printed material (All muting)

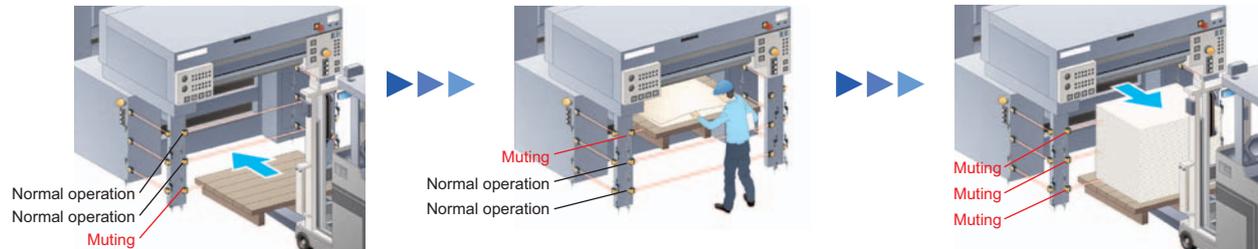

**Muting pattern No.2**

Set apart only the top-most sensor heads and perform muting control.


(Ex.) Passing through of an object is allowed but passing through of a human will stop the machine.

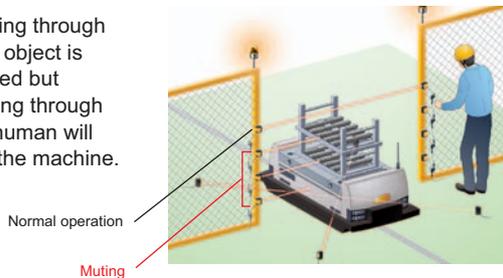

**Muting pattern No.3**

Divide the muting area into two.


(Ex.) Allocate sensor heads at the entrance and exit of objects separately, so that muting is done individually.

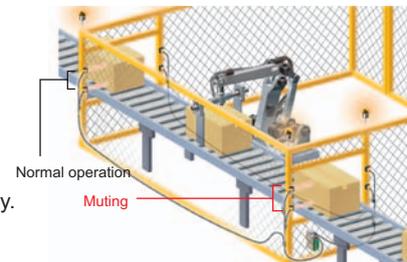

**Line restarts smoothly after being stopped while muting control was active <Override function>** High-functional type **ST4-C12EX**

In case the sensor head has been interrupted by an object or in case there is an emergency stop before the muting conditions have been established, all the sensor heads will be temporarily deactivated following by a smooth restart.

(Ex.) When the power turns off while the sensor head has been interrupted by an object.

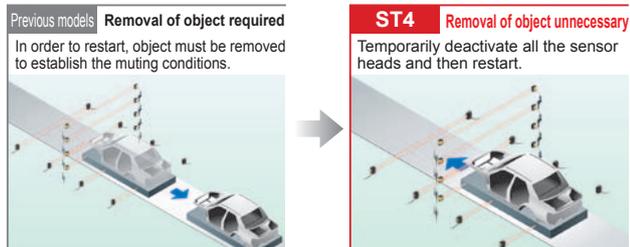

**Informs all kinds of operation conditions**

In case the muting lamp that is connected to the controller breaks, an alarm will go off. Also, auxiliary outputs that link to the muting function, override function, and control outputs (OSSD) are incorporated.

High-functional type **ST4-C12EX**

| Auxiliary outputs  | Function          | Operation                                  |
|--------------------|-------------------|--|
| Auxiliary output 1 | Muting output     | ON when muting function is invalid         |
| Auxiliary output 2 | Override output   | ON when override function is invalid       |
| Auxiliary output 3 | Blown lamp output | ON when muting lamp is in normal condition |
| Auxiliary output 4 | Monitor output    | ON when control output is OFF              |

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS / SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SG-B1/SG-A1
- SG-B2
- SG-C1
- SG-D1
- SG-E1
- SD3-A1
- ST4

**ORDER GUIDE**



FIBER SENSORS  
LASER SENSORS  
PHOTO-ELECTRIC SENSORS  
MICRO PHOTO-ELECTRIC SENSORS  
AREA SENSORS  
LIGHT CURTAINS SAFETY COMPONENTS  
PRESSURE / FLOW SENSORS  
INDUCTIVE PROXIMITY SENSORS  
PARTICULAR USE SENSORS  
SENSOR OPTIONS  
SIMPLE WIRE-SAVING UNITS  
WIRE-SAVING SYSTEMS  
MEASUREMENT SENSORS  
STATIC ELECTRICITY PREVENTION DEVICES  
LASER MARKERS  
PLC  
HUMAN MACHINE INTERFACES  
ENERGY CONSUMPTION VISUALIZATION COMPONENTS  
FA COMPONENTS  
MACHINE VISION SYSTEMS  
UV CURING SYSTEMS  
Selection Guide  
Light Curtains  
Safety Components  
Optical Touch Switch  
Control Units  
Definition of Sensing Heights  
SG-B1/SG-A1  
SG-B2  
SG-C1  
SG-D1  
SG-E1  
SD3-A1  
**ST4**

**Sensor heads** Always use the sensor head and the controller together as a set.

| Type                               | Appearance  | Operating range (Note 1)  | Model No. (Note 2) |
|------------------------------------|---|---|--------------------|
| Cable length 0.2 m <b>0.656 ft</b> |  |  0.1 to 15 m<br><b>0.328 to 49.231 ft</b> | <b>ST4-A1-J02</b>  |
| With emission amount adjuster      |   |   | <b>ST4-A1-J02V</b> |
| Cable length 1 m <b>3.281 ft</b>   |   |   | <b>ST4-A1-J1</b>   |
| With emission amount adjuster      |   |   | <b>ST4-A1-J1V</b>  |

Notes: 1) The "operating range" is the possible setting distance between the emitter and the receiver.  
 2) The model No. with suffix "E" shown on the label affixed to the product is the emitter, "D" shown on the label is the receiver.

**Controllers** Always use the sensor head and the controller together as a set.

| Type                 | Appearance   | Model No.        | Control output   |
|----------------------|--|------------------|--|
| Controller           |   | <b>ST4-C11</b>   | Dual PNP transistor open-collector output × 1 system<br>or<br>Dual NPN transistor open-collector output × 1 system<br>(Set using output polarity selection switch) |
| High-functional type |  | <b>ST4-C12EX</b> |  |

**OPTIONS**

| Designation                  | Model No.   | Description  |   |
|------------------------------|---|--|---|
| Extension cable              | <b>ST4-CCJ1E</b>                                    | Cable length: 1 m <b>3.281 ft</b>  | For emitter   |
|                              | <b>ST4-CCJ1D</b>                                    | Net weight 55 g approx. (1 cable)  | For receiver  |
|                              | <b>ST4-CCJ3E</b>                                    | Cable length: 3 m <b>9.843 ft</b>  | For emitter   |
|                              | <b>ST4-CCJ3D</b>                                    | Net weight 130 g approx. (1 cable)   | For receiver  |
|                              | <b>ST4-CCJ5E</b>                                    | Cable length: 5 m <b>16.404 ft</b>   | For emitter   |
|                              | <b>ST4-CCJ5D</b>                                    | Net weight 200 g approx. (1 cable)   | For receiver  |
|                              | <b>ST4-CCJ7E</b>                                    | Cable length: 7 m <b>22.966 ft</b>   | For emitter   |
|                              | <b>ST4-CCJ7D</b>                                    | Net weight 270 g approx. (1 cable)   | For receiver  |
|                              | <b>ST4-CCJ15E</b>                                   | Cable length: 15 m <b>49.213 ft</b>  | For emitter   |
| <b>ST4-CCJ15D</b>            | Net weight 540 g approx. (1 cable)                  | For receiver   |   |
| Branch cable                 | <b>ST4-CCJ05-WY</b>                                 | Cable length: 0.5 m <b>1.640 ft</b><br>Net weight 80 g approx. (2 cables)            | Use to connect <b>ST4-A</b> □ in series.<br>5-wire shielded cable.<br>Two cables per set for emitter and receiver<br>Cable color: Gray (for emitter), Gray with black line (for receiver)<br>Connector color: Gray (for emitter), Black (for receiver)<br>Min. bending radius: R5 mm <b>R0.197 in</b> |
| Sensor head mounting bracket | <b>MS-CX2-1</b>                                     | Foot angled mounting bracket. 2 different types for emitter and receiver required.   |   |
|                              | <b>MS-ST4-3</b>                                     | Back angled mounting bracket. 2 different types for emitter and receiver required.   |   |
|                              | <b>MS-ST4-6</b>                                     | Foot biangled mounting bracket. 2 different types for emitter and receiver required. |   |
| Round slit mask (Note)       | <b>OS-ST4-2</b><br>(Slit size ø2 mm)<br>(ø0.079 in) | Dampens the light to suppress interference with neighboring sensors.                 | Operating range<br>• Slit on one side: 3 m <b>9.843 ft</b><br>• Slit on both sides: 0.75 m <b>2.461 ft</b>  |
|                              | <b>OS-ST4-3</b><br>(Slit size ø3 mm)<br>(ø0.118 in) |  | Operating range<br>• Slit on one side: 4.5 m <b>14.764 ft</b><br>• Slit on both sides: 1.5 m <b>4.921 ft</b>  |

Note: When the slit mask is installed, applicable sensing objects are opaque objects with a diameter of ø9 mm **ø0.354 in** or more.

**Extension cable**

- **ST4-CCJ**□




**Branch cable**

- **ST4-CCJ05-WY**




**Sensor head mounting bracket**

- **MS-CX2-1**




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

- **MS-ST4-3**



Two M3 (length 12 mm **0.472 in**) screws with washers are attached.


- **MS-ST4-6**




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

**Round slit mask**

- **OS-ST4-2**
- **OS-ST4-3**



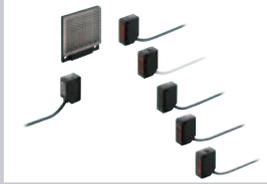**OPTIONS****Introduction to Panasonic Industrial Devices SUNX sensors that can be used as muting sensors****Compact Photoelectric Sensor  
CX-400 SERIES Ver.2**


- World standard size
- Wide variation

▶ P.277~

**Ultra-slim Photoelectric Sensor  
EX-10 SERIES Ver.2**

- 3.5 mm **0.138 in** thickness
- Long sensing range: 1 m **3.281 ft** (thru-beam type: **EX-19**)
- \* The **EX-20** series that is compatible with M3 mounting screws is also available.

▶ P.313~

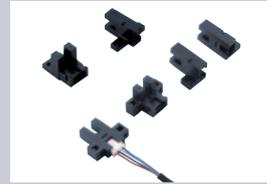**U-shaped Micro Photoelectric Sensor  
PM-64 SERIES**

- Extremely compact and space saving
- A lineup of quick fitting-up connector type

▶ P.429~

**Rectangular-shaped Inductive Proximity Sensor  
GX-F/H SERIES**

- Industry longest in stable sensing range
- 10 times the durability (Compared to previous models)
- IP68G protective construction

▶ P.807~

**Recommended muting lamps**

Manufactured by Maruyasu Dengo Co., Ltd.    Manufactured by IDEC Corporation  
Model No.: BLR-300-C                              Model No.: HW1P-5Q7A  
Note: Contact the manufacturers for details on the recommended products.

**Recommended safety relays**

Manufactured by Panasonic Corporation  
Model No.: SF series (Safety Relay)  
Note: Contact the manufacturers for details on the recommended products.

**SPECIFICATIONS****Sensor heads**

| Item                                   | Type<br>Model No.        | Cable length 0.2 m <b>0.656 ft</b>  |   | Cable length 1 m <b>3.281 ft</b>                        |  |
|--|--------------------------|---|---|---|--|
|  |                          | <b>ST4-A1-J02</b>   | With emission amount adjuster<br><b>ST4-A1-J02V</b> | <b>ST4-A1-J1</b>  | With emission amount adjuster<br><b>ST4-A1-J1V</b> |
| Applicable standard (Note 2)           |                          | IEC 61496-1/2 (JIS B 9704-1/2 / UL 61496-1/2) (Type 4), ISO 13849-1 (Category 4, PLe), JIS B 9705-1 (Category 4), IEC 61508-1 to 7 (SIL3), IEC 62061 (SIL3), JIS C 0508-1 to 7 (SIL3), UL 1998, OSHA 1910.212, OSHA 1910.217 (C), ANSI B11.1 to B11.19, ANSI/RIA R15.06, ANSI/ISA S84.01 (SIL3) |   |   |  |
| Operating range                        |                          | 0.1 to 15 m <b>0.328 to 49.213 ft</b> (Note 3)  |   |   |  |
| Sensing object                         |                          | ø9 mm <b>ø0.354 in</b> or more opaque object  |   |   |  |
| Effective aperture angle (EAA)         |                          | ±2.5° or less for operating range exceeding 3 m <b>9.843 ft</b> (required by IEC 61496-2 / UL 61496-2)  |   |   |  |
| Supply voltage                         |                          | Supplied from controller  |   |   |  |
| Current consumption                    |                          | Emitter: 11 mA or less, Receiver: 9 mA or less  |   |   |  |
| Beam interruption indicator (Note 4)   |                          | Red LED (lights up when the beam is interrupted or lock out, lights off during reception)   |   |   |  |
| Beam emission indicator                |                          | Green LED (lights up during beam emission, lights off during emission halt)   |   |   |  |
| Stable incident beam indicator         |                          | Green LED (lights up under stable light received condition, lights off under unstable light received condition)   |   |   |  |
| Environmental resistance               | Degree of protection     | IP67 (IEC)  |   |   |  |
|  | Ambient temperature      | -10 to +55 °C <b>+14 to +131 °F</b> (No dew condensation or icing allowed), Storage: -25 to +70°C <b>-13 to +158 °F</b>   |   |   |  |
|  | Ambient humidity         | 30 to 85 % RH, Storage: 30 to 95 % RH   |   |   |  |
|  | Ambient illuminance      | Incandescent lamp: 3,500 lx at the light-receiving face   |   |   |  |
|  | Voltage withstandability | 1,000 V AC for one min. between all supply terminals connected together and enclosure   |   |   |  |
|  | Insulation resistance    | 20 MΩ or more with 500V DC megger between all supply terminals connected together and enclosure   |   |   |  |
|  | Vibration resistance     | 10 to 55 Hz frequency, 0.75 mm <b>0.030 in</b> amplitude in X, Y and Z directions for two hours each  |   |   |  |
|  | Shock resistance         | 300 m/s <sup>2</sup> acceleration in X, Y and Z directions for three times each   |   |   |  |
| Emitting element                       |                          | Infrared LED (Peak emission wavelength: 870 nm <b>0.034 mil</b> )   |   |   |  |
| Material                               |                          | Enclosure: PBT (Polybutylene terephthalate), Lens: Acrylic, Indicator cover: Acrylic  |   |   |  |
| Cable                                  |                          | Shielded cable with connector, 0.2 m <b>0.656 ft</b> long   |   | Shielded cable with connector, 1 m <b>3.281 ft</b> long |  |
| Cable extension                        |                          | Extension up to total 50 m <b>164.042 ft</b> is possible for both emitter and receiver with exclusive cable.  |   |   |  |
| Weight (Total of emitter and receiver) |                          | Net weight: 45 g approx., Gross weight: 60 g approx.  |   | Net weight: 100 g approx., Gross weight: 140 g approx.  |  |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.  
2) Complies with those standards only when the sensor head is used in combination with the controller **ST4-C11 / ST4-C12EX**.  
3) The operating range is the possible setting distance between the emitter and the receiver. It can detect sensing object of less than 0.1 m **0.328 ft** away.  
4) Shows light interruption information between the emitter and the receiver with the same address. It does not show OSSD output.

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINS/  
SAFETY  
COMPONENTSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
ELECTRICITY  
PREVENTION  
DEVICESLASER  
MARKERS

PLC

HUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
GuideLight  
CurtainsSafety  
ComponentsOptical Touch  
SwitchControl  
UnitsDefinition of  
Sensing  
Heights

SG-B1/SG-A1

SG-B2

SG-C1

SG-D1

SG-E1

SD3-A1

ST4

## SPECIFICATIONS

### Controllers

| Item                                    | Type  | Controller  | High-functional controller |
|---|---|---|----------------------------|
|   | Model No.   | ST4-C11   | ST4-C12EX                  |
| Applicable sensor head                  | ST4-A□  |   |                            |
| No. of series connections               | Interference prevention possible when up to a maximum of 6 sets are connected (When the maximum of 3 controllers are connected together, interference prevention is possible for up to 18 sets)   |   |                            |
| Applicable standards (Note 2)           | IEC 61496-1/2 (JIS B 9704-1/2 / UL 61496-1/2) (Type 4), ISO 13849-1 (Category 4, PLLe), JIS B 9705-1 (Category 4), IEC 61508-1 to 7 (SIL3), IEC 62061 (SIL3), JIS C 0508-1 to 7 (SIL3), UL 1998, OSHA 1910.212, OSHA 1910.217 (C), ANSI B11.1 to B11.19, ANSI/RIA R15.06, ANSI/ISA S84.01 (SIL3)  |   |                            |
| Supply voltage                          | 24 V DC $^{+10}_{-15}$ % Ripple P-P 10 % or less  |   |                            |
| Current consumption                     | 100 mA or less (excluding sensor head ST4-A□)   | 120 mA or less (excluding sensor head ST4-A□)   |                            |
| Control outputs (OSSD1, OSSD2) (Note 3) | PNP open-collector transistor / NPN open-collector transistor<br>Dual output × 1 system (Set using output polarity selection switch)<br><PNP output> <ul style="list-style-type: none"> <li>• Maximum source current: 200 mA</li> <li>• Applied voltage: same as the supply voltage (between control output and +V)</li> <li>• Residual voltage: 2.5 V or less (at 200 mA source current)</li> <li>• Leakage current: 200 μA or less (including power OFF condition)</li> <li>• Maximum load capacity: 1 μF (from no-load to max. source current)</li> <li>• Load wiring resistance: 3 Ω or less (between control output and load)</li> </ul> |   |                            |
|   | <NPN output> <ul style="list-style-type: none"> <li>• Maximum sink current: 200 mA</li> <li>• Applied voltage: same as the supply voltage (between control output and 0 V)</li> <li>• Residual voltage: 2.0 V or less (at 200 mA sink current)</li> <li>• Leakage current: 200 μA or less (including power OFF condition)</li> <li>• Maximum load capacity: 1 μF (from no-load to max. sink current)</li> <li>• Load wiring resistance: 3 Ω or less (between control output and load)</li> </ul>  |   |                            |
|   | ON when all beams of the connected ST4-A□s are received<br>OFF when one or more beams of the connected ST4-A□s are interrupted (except during muting / override when ST4-C12EX is used)<br>OFF during lockout   |   |                            |
| Protection circuit                      | Incorporated  |   |                            |
| Response time                           | OFF response: 25 ms or less, ON response: 90 ms or less (auto reset) / 140 ms or less (manual reset)  |   |                            |
| Auxiliary outputs (Note 3)              | PNP open-collector transistor / NPN open-collector transistor (Set using output polarity selection switch)<br><b>ST4-C11</b> : one output<br><b>ST4-C12EX</b> : four outputs<br><PNP output> <ul style="list-style-type: none"> <li>• Maximum source current: 100 mA</li> <li>• Applied voltage: same as the supply voltage (between auxiliary output and +V)</li> <li>• Residual voltage: 2.5 V or less (at 100 mA source current)</li> </ul>  |   |                            |
|   | <NPN output> <ul style="list-style-type: none"> <li>• Maximum sink current: 100 mA</li> <li>• Applied voltage: same as the supply voltage (between auxiliary output and 0 V)</li> <li>• Residual voltage: 2.0 V or less (at 100 mA sink current)</li> </ul>   |   |                            |
|   | OFF when all beams of the connected ST4-A□s are received<br>ON when one or more beams of the connected ST4-A□s are interrupted<br><Auxiliary output 1><br>ON when muting function is invalid<br>OFF when muting function is valid<br><Auxiliary output 2><br>ON when override function is invalid<br>OFF when override function is valid<br><Auxiliary output 3><br>ON when muting lamp is in normal condition<br>OFF when muting lamp is in abnormal condition<br><Auxiliary output 4><br>Negative logic of the control outputs (OSSD1, OSSD2)   |   |                            |
| Protection circuit                      | Incorporated  |   |                            |
| Muting lamp output (Note 3)             | —   | Available muting lamp: 24 V DC, 1 to 10 W   |                            |
| Environmental resistance                | Protection circuit  | Incorporated  |                            |
|   | Degree of protection  | Enclosure: IP40 (IEC), Terminal: IP20 (IEC)   |                            |
|   | Ambient temperature   | -10 to +55 °C <b>+14 to +131 °F</b> (No dew condensation or icing allowed), Storage: -25 to +70°C <b>-13 to +158 °F</b> |                            |
|   | Ambient humidity  | 30 to 85 % RH, Storage: 30 to 95 % RH   |                            |
|   | Voltage withstandability  | 1,000 V AC for one min. between all supply terminals connected together and enclosure                                   |                            |
|   | Insulation resistance   | 20 MΩ or more with 500 V DC mega between all supply terminals connected together and enclosure                          |                            |
|   | Vibration resistance  | 10 to 55 Hz frequency, 0.75 mm <b>0.030 in</b> amplitude in X, Y and Z directions for two hours each                    |                            |
|   | Shock resistance  | 300 m/s <sup>2</sup> acceleration in X, Y and Z directions for three times each   |                            |
| Connection terminal                     | Detachable spring-cage terminal   |   |                            |
| Wiring cable                            | Terminal block connector: 0.2 to 1.5 mm <sup>2</sup><br>Power supply connector (A1, A2): 0.2 to 2.5 mm <sup>2</sup> (only for ST4-C12EX)  |   |                            |
| Material                                | Enclosure: ABS  |   |                            |
| Weight                                  | Net weight: 180 g approx., Gross weight: 390 g approx.  | Net weight: 240 g approx., Gross weight: 450 g approx.  |                            |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

2) Complies with those standards only when the controller is used in combination with the sensor head ST4-A□.


3) If the total current of the control outputs (OSSD1, OSSD2), auxiliary outputs, and muting lamp output exceeds 400 mA, the wiring resistance between the controller and the power supply should be 1 Ω or less. In addition, if the total current is 400 mA or less, the wiring resistance between the controller and the power supply should be 2 Ω or less.

**I/O CIRCUIT AND WIRING DIAGRAMS**

**ST4-C11**

**In case of PNP output**

- Set the output polarity selection switch to the PNP side.

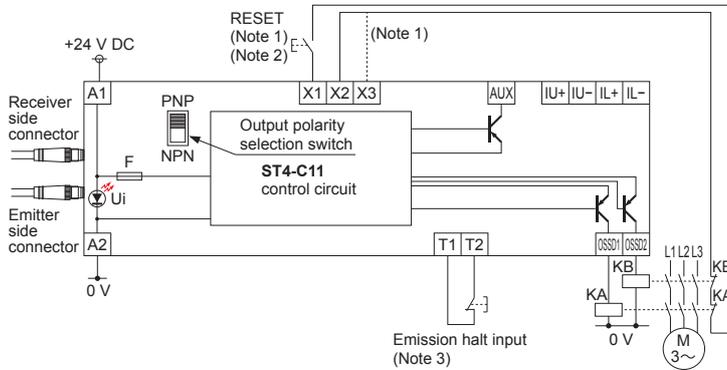


- Notes: 1) The left diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.
- 2) Use a momentary-type switch as the reset (RESET) button.
- 3) Emission halt input is for stopping emission when open, and emitting when short-circuited. If not using the test button, short-circuit T1 and T2.

KA, KB: Force-guided relay or magnetic contactor

**In case of NPN output**


- Set the output polarity selection switch to the NPN side.

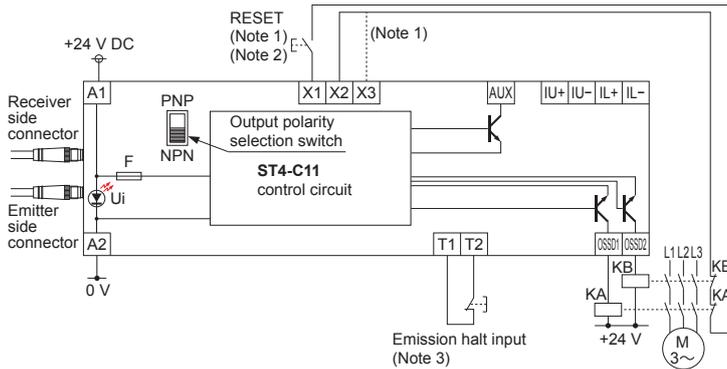

- Notes: 1) The left diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.
- 2) Use a momentary-type switch as the reset (RESET) button.
- 3) Emission halt input is for stopping emission when open, and emitting when short-circuited. If not using the test button, short-circuit T1 and T2.

KA, KB: Force-guided relay or magnetic contactor

**Terminal arrangement diagram**

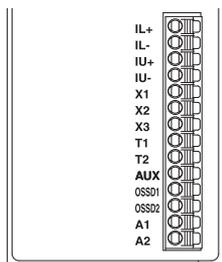

| Terminal | Description   |
|----------|---|
| IL+      | Interference prevention terminals   |
| IL-      |   |
| IU+      | Interference prevention terminals   |
| IU-      |   |
| X1       | Reset input terminals<br>(When X1 and X2 are connected: manual reset, and when X1 and X3 are connected: auto reset) |
| X2       |   |
| X3       |   |
| T1       | Emission halt input terminals<br>(Open: emission halt, Short-circuit: emission)                                     |
| T2       |   |
| AUX      | Negative logic of the control outputs (OSSD1, OSSD2)  |
| OSSD1    | Control outputs (OSSD1, OSSD2)  |
| OSSD2    |   |
| A1       | 24 V DC   |
| A2       | 0 V   |

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS/ SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Light Curtains

Safety Components

Optical Touch Switch

Control Units

Definition of Sensing Heights

SG-B1/SGA1

SG-B2

SG-C1

SG-D1

SG-E1

SD3-A1


ST4

**I/O CIRCUIT AND WIRING DIAGRAMS**


**ST4-C12EX**

**In case of PNP output**

- Set the output polarity selection switch to the PNP side.

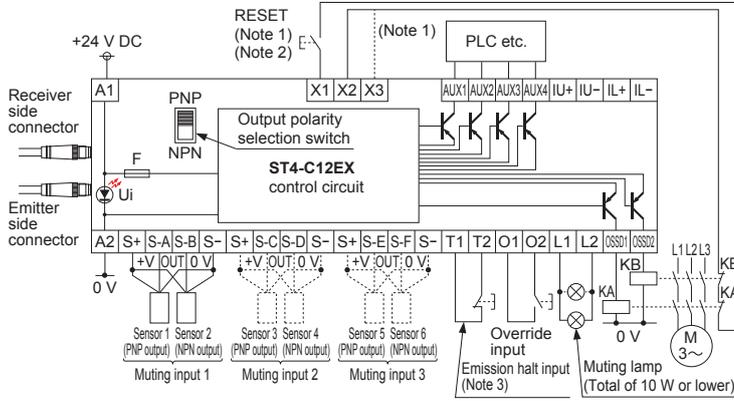

When using the normally open (NO) contact switch as a muting sensor, wire as shown in the figure below.




- Notes: 1) The left diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.  
 2) Use a momentary-type switch as the reset (RESET) button.  
 3) Emission halt input is for stopping emission when open, and emitting when short-circuited. If not using the test button, short-circuit T1 and T2.


KA, KB: Force-guided relay or magnetic contactor

**In case of NPN output**

- Set the output polarity selection switch to the NPN side.

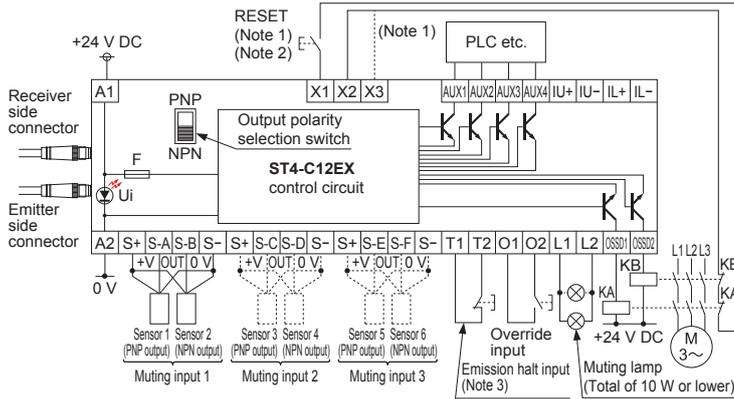


When using the normally open (NO) contact switch as a muting sensor, wire as shown in the figure below.



- Notes: 1) The left diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.  
 2) Use a momentary-type switch as the reset (RESET) button.  
 3) Emission halt input is for stopping emission when open, and emitting when short-circuited. If not using the test button, short-circuit T1 and T2.

KA, KB: Force-guided relay or magnetic contactor

**Terminal arrangement diagram**

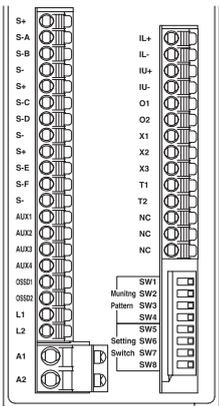

| Terminal | Description   |
|----------|---|
| S+       | Muting input power supply (24 V)  |
| S-A      | Muting input S-A [For NO (normally open) contact or PNP output type sensor] |
| S-B      | Muting input S-B [For NO (normally open) contact or NPN output type sensor] |
| S-       | Muting input power supply (0 V)   |
| S+       | Muting input power supply (24 V)  |
| S-C      | Muting input S-C [For NO (normally open) contact or PNP output type sensor] |
| S-D      | Muting input S-D [For NO (normally open) contact or NPN output type sensor] |
| S-       | Muting input power supply (0 V)   |
| S+       | Muting input power supply (24 V)  |
| S-E      | Muting input S-E [For NO (normally open) contact or PNP output type sensor] |
| S-F      | Muting input S-F [For NO (normally open) contact or NPN output type sensor] |
| S-       | Muting input power supply (0 V)   |
| AUX1     | Auxiliary output 1 (muting function)  |
| AUX2     | Auxiliary output 2 (override function)                                      |
| AUX3     | Auxiliary output 3 (muting lamp shutoff)                                    |
| AUX4     | Negative logic of the control outputs (OSSD1, OSSD2)                        |
| OSSD1    | Control outputs (OSSD1, OSSD2)  |
| OSSD2    |   |
| L1       | Muting lamp connecting terminal   |
| L2       |   |
| A1       | 24 V DC   |
| A2       | 0 V   |

| Terminal | Description   |
|----------|---|
| IL+      | Interference prevention terminals   |
| IL-      |   |
| IU+      | Interference prevention terminals   |
| IU-      |   |
| O1       | Override input terminals  |
| O2       |   |
| X1       | Reset input terminals<br>(When X1 and X2 are connected: manual reset, and when X1 and X3 are connected: auto reset) |
| X2       |   |
| X3       |   |
| T1       | Emission halt input terminals<br>(Open: emission halt, Short-circuit: emission)                                     |
| T2       |   |

- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SG-B1/SG-A1
- SG-B2
- SG-C1
- SG-D1
- SG-E1
- SD3-A1
- ST4

**PRECAUTION FOR PROPER USE**


Refer to p.1501 for general precautions.

**Influence of reflective surfaces**



If there exists a reflective surface in the place where this device is to be installed, make sure to install this device so that reflected light from the reflective surface does not enter into the receiver, or take countermeasures such as painting, masking, roughening, or changing the material of the reflective surface, etc. Failure to do so may cause the device not to detect, resulting in death or serious injury.


- Install this device at a distance of at least A (m) (given below) away from reflective surfaces such as metal walls, floors, ceilings, objects, covers, panels or glass surfaces.

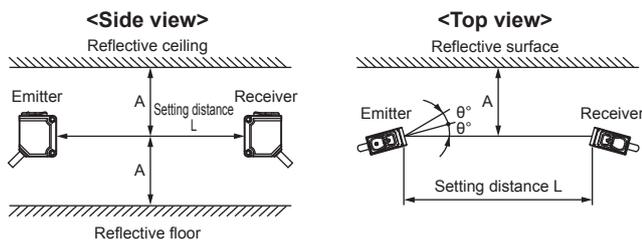

| Distance between emitter and receiver (Setting distance L) | Allowable installation distance A   |
|--|---|
| 0.1 to 3 m <b>0.328 to 9.843 ft</b>                        | 0.16 m <b>0.525 ft</b>  |
| 3 to 15 m <b>9.843 to 49.213 ft</b>                        | $L / 2 \times \tan 2\theta = L \times 0.053$ (m) <b>0.174 (ft)</b> ( $\theta = 3^\circ$ ) |


Note: The effective aperture angle for this device is  $\pm 2.5^\circ$  (when  $L > 3$  m **9.843 ft**) as required by IEC 61496-2 / UL 61496-2. However, install this device away from reflective surfaces considering an effective aperture angle of  $\pm 3^\circ$  to take care of beam misalignment, etc. during installation.

**Allowable installation distance between reflective surfaces and beam axis of receiver**

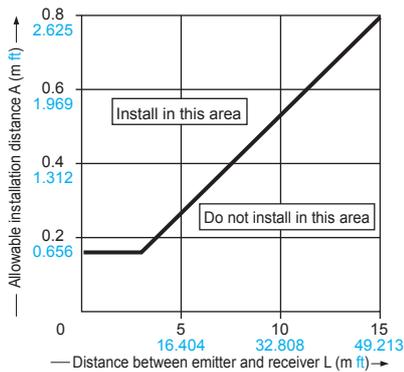


**Mounting**

- When mounting the sensor head, the tightening torque should be 0.5 N·m or less.

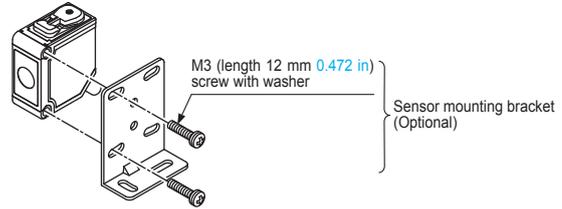

- When mounting **ST4-CCJ05-WY**, the tightening torque should be 0.7 N·m or less. Using a vinyl tie (width 4 mm **0.157 in** or less) to fix the cable is also possible.

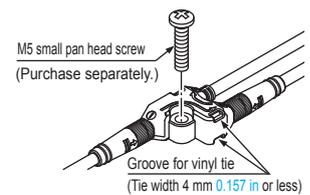

**Wiring**



Refer to the applicable regulations for the region where this device is to be used when setting up the device. In addition, make sure that all necessary measures are taken to prevent possible dangerous operating errors resulting from earth faults.

- Make sure to carry out the wiring in the power supply off condition.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this sensor and controller, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.
- It is recommended that the following single wires or twisted wires (lead wires) be used to connect to the terminal block of the controller.
  - Terminal block connector: 0.2 to 1.5 mm<sup>2</sup> (AWG24 to AWG16)
  - Power supply connector (A1, A2) (**ST4-C12EX** only): 0.2 to 2.5 mm<sup>2</sup> (AWG24 to AWG12)

**Others**

- Do not use during the initial transient time (2 sec.) after the power supply is switched on.
- Avoid dust, dirt and steam.
- Take care that the sensor does not come in direct contact with water, oil, grease, or organic solvents, such as, thinner, etc.
- Take care that the sensor is not directly exposed to fluorescent lamp from a rapid-starter lamp or a high frequency lighting device, as it may affect the sensing performance.
- The DC power supply unit must satisfy the conditions given below.
  - 1) Power supply unit authorized in the region where this devices is to be used.
  - 2) Power supply unit conforming to EMC Directive and Low-voltage Directive (In case CE conformity is required).
  - 3) Power supply unit conforming to the Low-voltage Directive and with an output of 100 VA or less.
  - 4) The frame ground (F.G.) terminal must be connected to ground when using a commercially available switching regulator.
  - 5) Power supply unit with an output holding time of 20 ms or more.
  - 6) If surges are likely to occur, take countermeasures such as connecting a surge absorber to the origin of the surge.
  - 7) Power supply unit corresponding to Class 2 (In case UL / cUL conformity is required).

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

---

Selection Guide

Light Curtains

Safety Components

Optical Touch Switch

Control Units

Definition of Sensing Heights

---

SG-B1/SG-A1

SG-B2

SG-C1

SG-D1

SG-E1

SD3-A1


**ST4**

- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS

**DIMENSIONS (Unit: mm in)**


The CAD data in the dimensions can be downloaded from our website.

**ST4-A** Sensor head

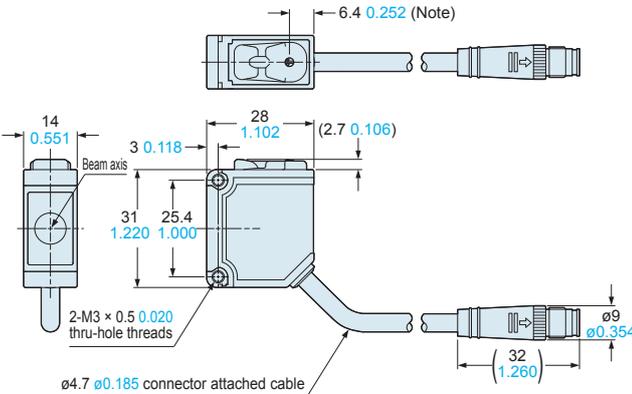


Note: It indicates the position of the emission amount adjuster on **ST4-A**V.


**ST4-C11** Controller

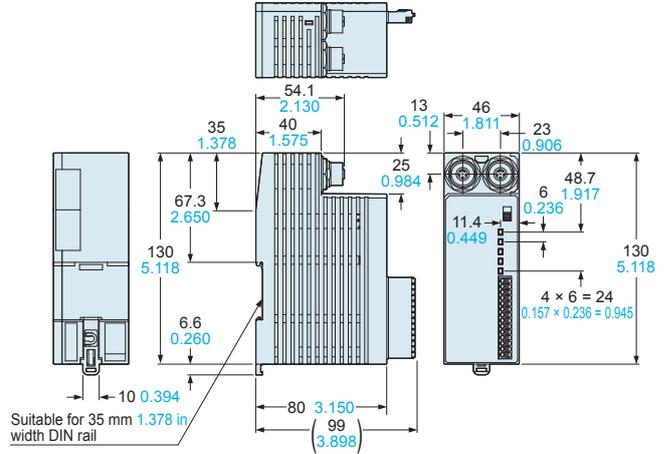

**ST4-C12EX** Controller

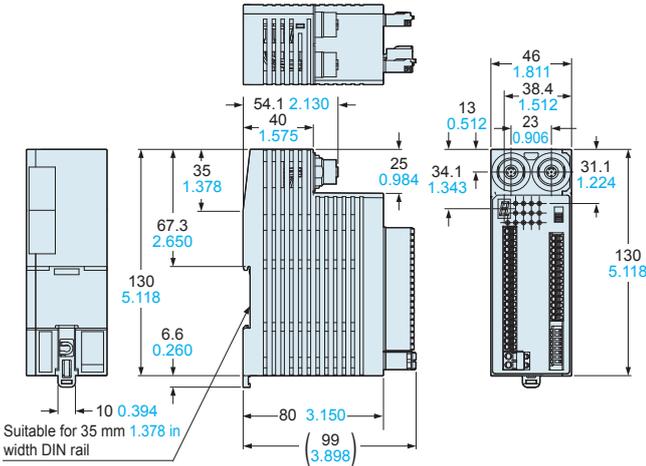


**ST4-CCJ** Extension cable (Optional)

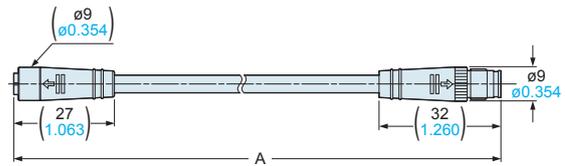


| Model No.        | A                     |
|------------------|-----------------------|
| <b>ST4-CCJ1</b>  | 1,000 <b>39.370</b>   |
| <b>ST4-CCJ3</b>  | 3,000 <b>118.110</b>  |
| <b>ST4-CCJ5</b>  | 5,000 <b>196.850</b>  |
| <b>ST4-CCJ7</b>  | 7,000 <b>275.590</b>  |
| <b>ST4-CCJ15</b> | 15,000 <b>590.550</b> |

**ST4-CCJ05-WY** Branch cable (Optional)

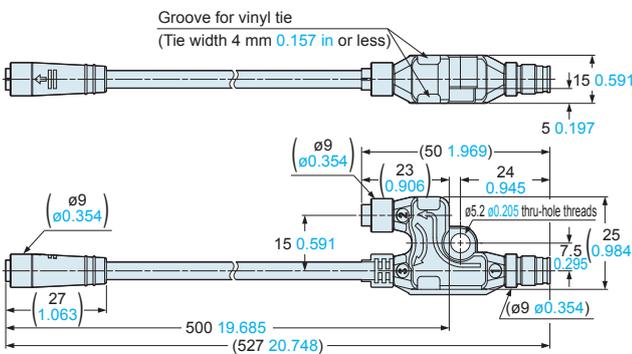

**MS-CX2-1** Sensor head mounting bracket (Optional)

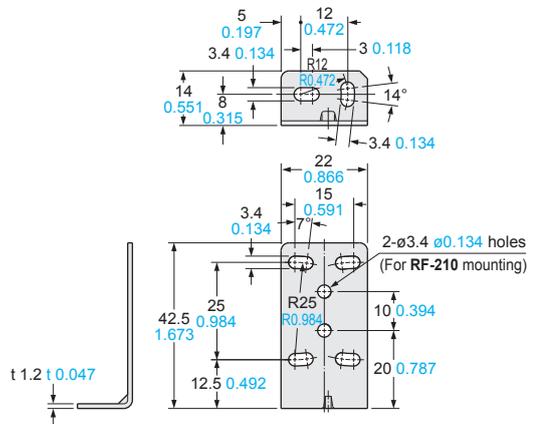


Material: Stainless steel (SUS304)  
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SG-B1/SG-A1
- SG-B2
- SG-C1
- SG-D1
- SG-E1
- SD3-A1
- ST4**

**DIMENSIONS (Unit: mm in)**


The CAD data in the dimensions can be downloaded from our website.

**MS-ST4-3** Sensor head mounting bracket (Optional)

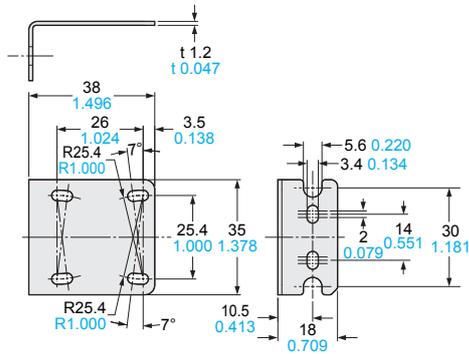

Material: Stainless steel (SUS304)  
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

**MS-ST4-6** Sensor head mounting bracket (Optional)

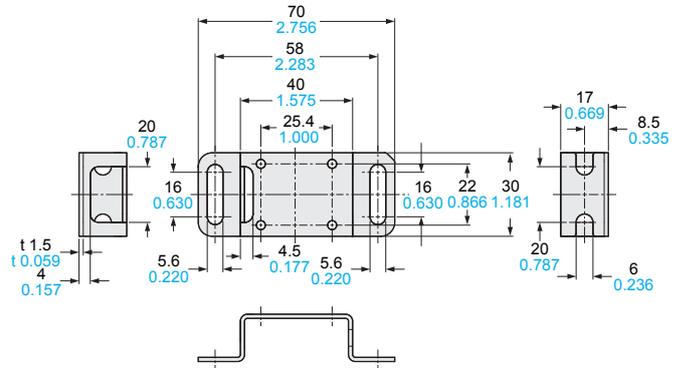

Material: Stainless steel (SUS304)  
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Light Curtains

Safety Components

Optical Touch Switch

Control Units

Definition of Sensing Heights

SG-B1/SG-A1

SG-B2

SG-C1

SG-D1

SG-E1

SD3-A1

ST4