



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SCA-2
Press-Fit Receptacle (80 Circuit)
Upper Alignment Tool
Order No. 62100-2602

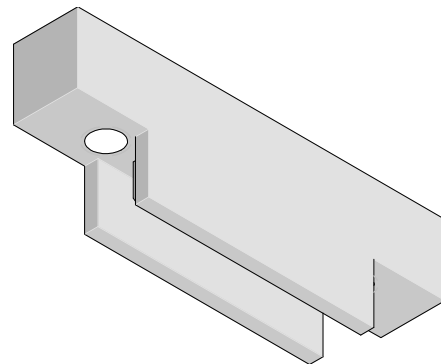

FEATURES

- This tool is intended to insert the SCA-2 Press-Fit Receptacle.
- For lower alignment tooling (PCB support), see Molex part number 62100-2601.

SCOPE

Products: 1.27mm (.050") Pitch SCA-2 Receptacle, Press-Fit Assembly, 73826 Series (80 Circuits)
 See Product List below for specific part numbers.


Product List

The following is a partial list of the product order numbers and their specifications this tool is designed to run.
 Updates to this list are available on www.molex.com.

Series No.	Assembly Order Number				
73826	73826-0001	73826-0003	73826-5001	73826-5003	

Tool Setup

1. Mounting holes (M5 threaded) are provided in the tool for attachment to a (customer-provided) tooling plate. For mounting dimensions, see Figure 1.
2. The Upper Alignment Tool must be mounted such that it is central to the receptacle.
3. The tooling plate must be of sufficient thickness to support the maximum insertion force for this connector, approximately 600 lbs (270 kg).

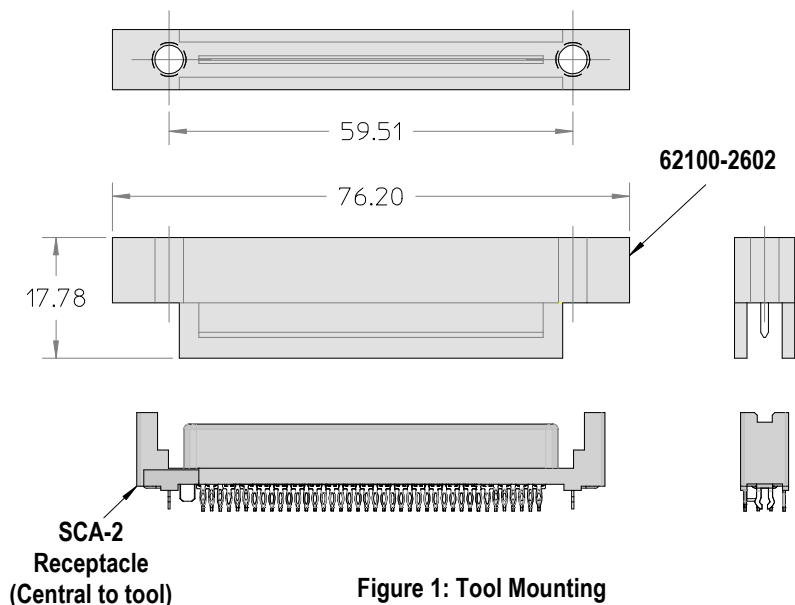

Tool Operation

1. Position the PCB above the Lower Alignment Tool (62100-2601); ensuring the tool does not block any of the holes in the PCB.
2. Place the SCA-2 Receptacle in the PCB hole pattern by hand. Make sure all pins have entered the holes.
3. Using the Upper Alignment Tool and a suitable press, insert the receptacle in the PCB until there is less than 0.005" (0.13mm) clearance between the bottom of the receptacle housing and the surface of the PCB. See Figure 2.

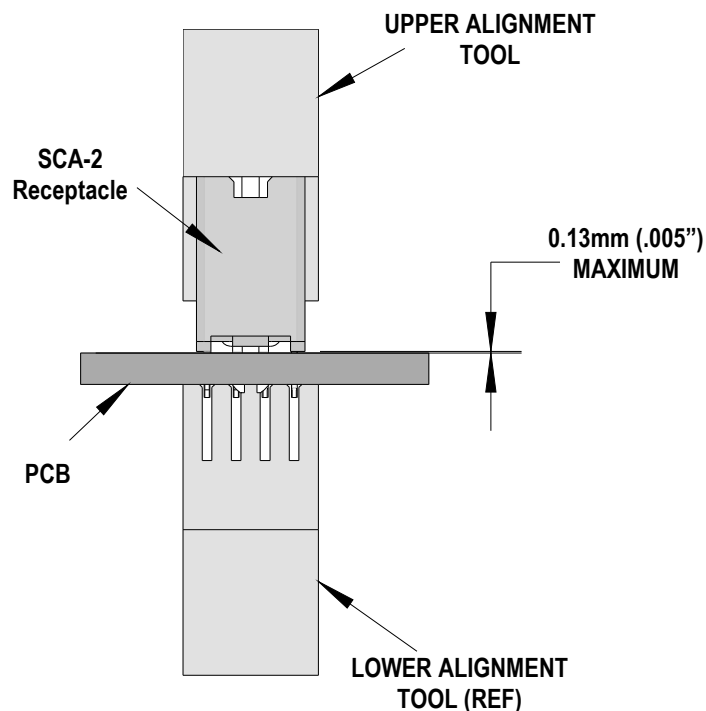


Figure 2: INSERTION DETAILS

CAUTION: Molex application tooling specifications are valid only when used with Molex connectors and tooling.

Contact Information

For more information on Molex application tooling please contact Molex at 1-800-786-6539.

Americas Headquarters
 Lisle, Illinois 60532 U.S.A.
 1-800-78MOLEX
 amerinfo@molex.com

Far East North Headquarters
 Yamato, Kanagawa, Japan
 81-462-65-2324
 feninfo@molex.com

Far East South Headquarters
 Jurong, Singapore
 65-6-268-6868
 fesinfo@molex.com

European Headquarters
 Munich, Germany
 49-89-413092-0
 eurinfo@molex.com

Corporate Headquarters
 2222 Wellington Ct.
 Lisle, IL 60532 U.S.A.
 630-969-4550
 Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>