

Stamped crimp contacts




| Identification | Wire gauge (mm ²) | Part number | | |
|----------------|-------------------------------|-------------|--|--|
|----------------|-------------------------------|-------------|--|--|

D-Sub

| Performance levels Explanations see page 05.04 Other performance levels on request | | stamped male contacts | | |
|---|------------------------------------|--|--|--|
| | | Performance level 3 | Performance level 2 | Performance level 1 |
| Individual contacts | AWG 28-24 0.09-0.25 stranded | 09 67 000 7177 ¹⁾ | 09 67 000 7178 ¹⁾ | 09 67 000 7176 ¹⁾ |
| 500 pieces/reel Unrolling left | | 09 67 000 7167 | 09 67 000 7168 | 09 67 000 7166 |
| 10 000 pieces/reel Unrolling left Unrolling left reversed Unrolling right reversed | | 09 67 000 7157 09 67 000 7147 09 67 000 7137 | 09 67 000 7158 09 67 000 7148 09 67 000 7138 | 09 67 000 7156 09 67 000 7146 09 67 000 7136 |
| Individual contacts | AWG 24-20 0.25-0.56 stranded | 09 67 000 8177 ¹⁾ | 09 67 000 8178 ¹⁾ | 09 67 000 8176 ¹⁾ |
| 500 pieces/reel Unrolling left | | 09 67 000 8167 | 09 67 000 8168 | 09 67 000 8166 |
| 10 000 pieces/reel Unrolling left Unrolling left reversed Unrolling right reversed | | 09 67 000 8157 09 67 000 8147 09 67 000 8137 | 09 67 000 8158 09 67 000 8148 09 67 000 8138 | 09 67 000 8156 09 67 000 8146 09 67 000 8136 |

Unrolling direction

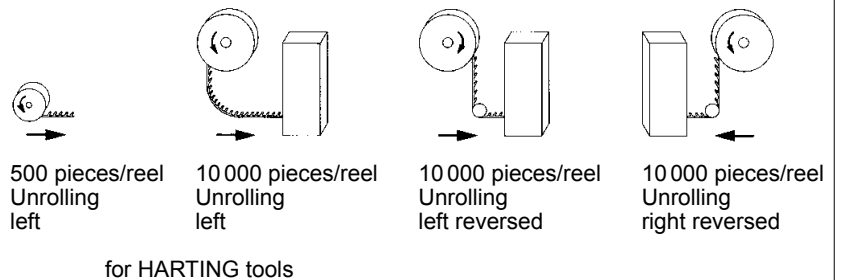

¹⁾ Minimum order 500 pieces or multiples of 500
 Insertion and removal tool see chapter 20
 Contact dimensions see page 05.29