



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Specification

Spec No. : **FXP270**  
Part No. : **FXP270.07.0100A**  
Model : 784MHz ISM Band Flex Circuit Antenna  
Features : 75\*45\*0.1mm  
100mm Ø1.13 Cable  
**RoHS** ✓



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
A	09/21/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras

## I. OVERVIEW

The Taoglas FXP270 784 MHz ISM Band Antenna covers from 779-787 MHz used in the 784 MHz ISM (Industrial Scientific Medical) Chinese Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

## II. ANTENNA CHARACTERISTICS

Parameter	Specification
Frequency Range	779MHz to 787MHz
Return Loss (dB)	-20
Efficiency (%)	40
Gain (dBi)	1.4
Impedance	50 $\Omega$
VSWR	$\leq 2:1$
Polarization	Linear
Power Handled	5W
Operation Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Dimensions	75*45*0.1mm
Weight	1.5g
Connector	MHFII (U.FL Compatible)
Cable Standard	Mini-Coax 1.13 mm
Cable Length and color	100mm, Black
RoHS Compliant	Yes
Adhesive	3M 467



### III. TEST SET UP

An ETS-Lindgren 3D Scan System with Anechoic Chamber

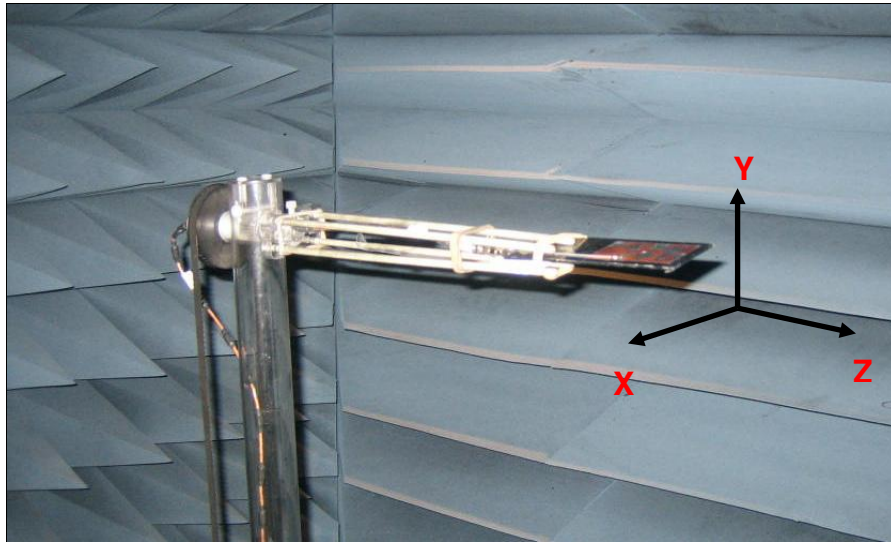


Figure 1. ETS-Lindgren System.

Rhode & Schwartz ZVL6 Vector Network Analyzer

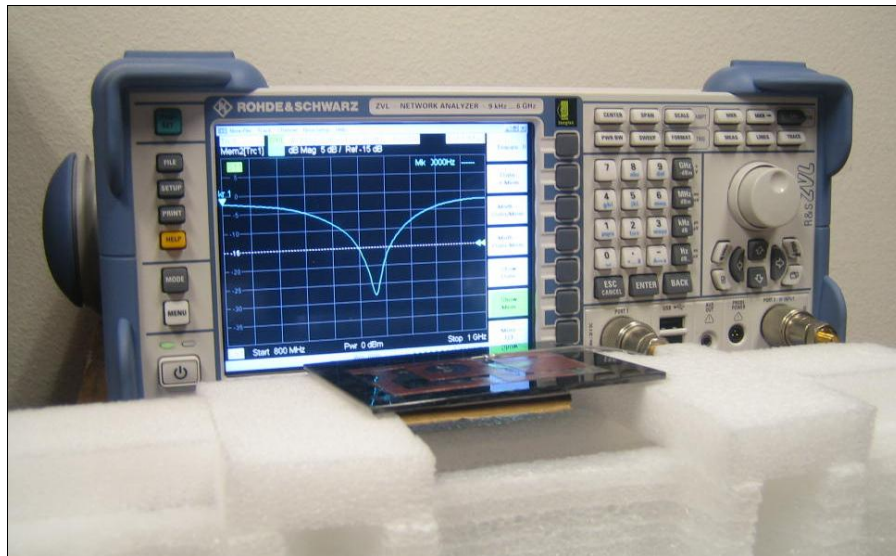


Figure 2. Network Analyzer.

## IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer. The Gain, Efficiency and Radiation Patterns were measured in the ETS-Lindgren 3D Scan System.

### A. Return Loss Data

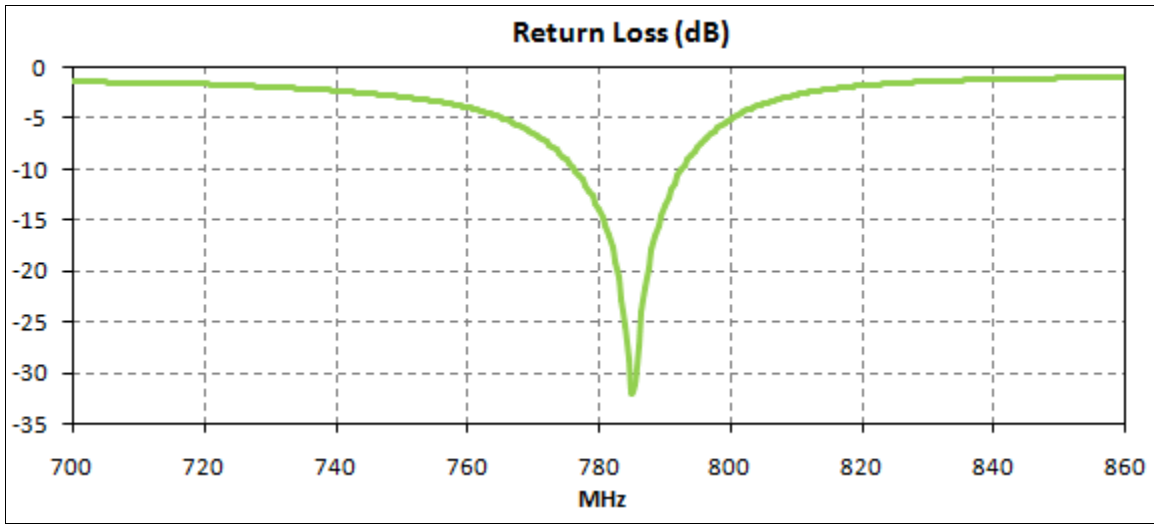


Figure 3. Return Loss for the FXP270 Antenna.

### B. VSWR Data


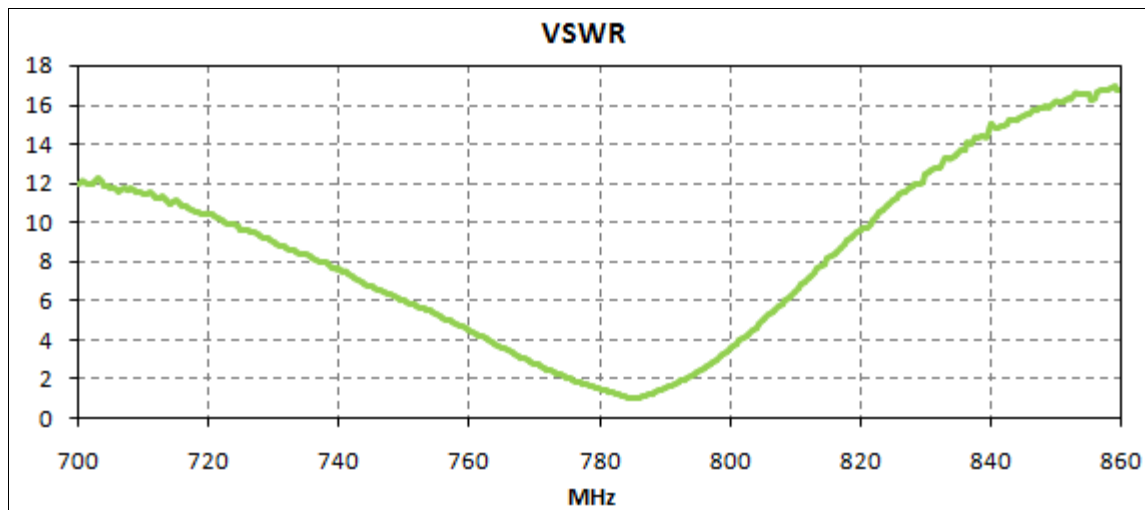



Figure 4. VSWR for the FXP270 Antenna.

## C. Smith Chart Data

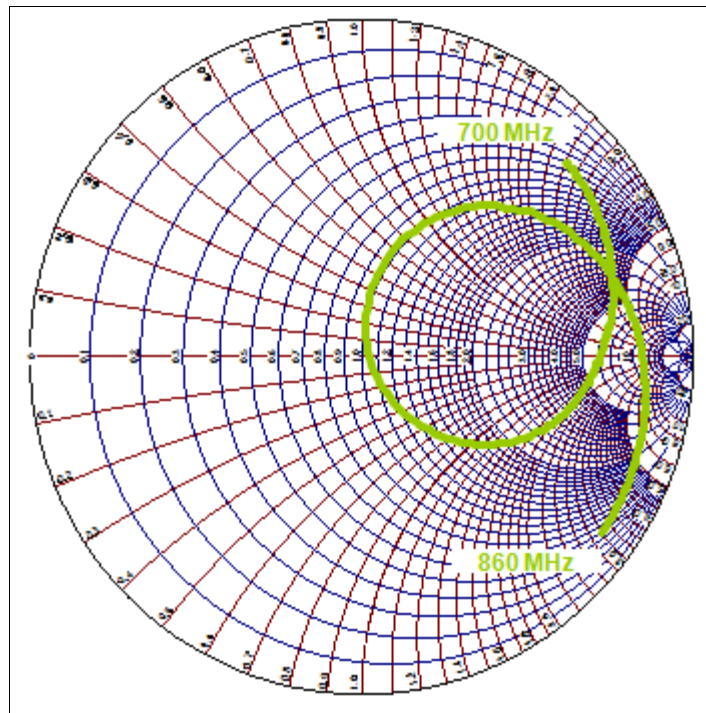

**Figure 5.** Smith Chart for the FXP270 Antenna.

## D. Efficiency Data

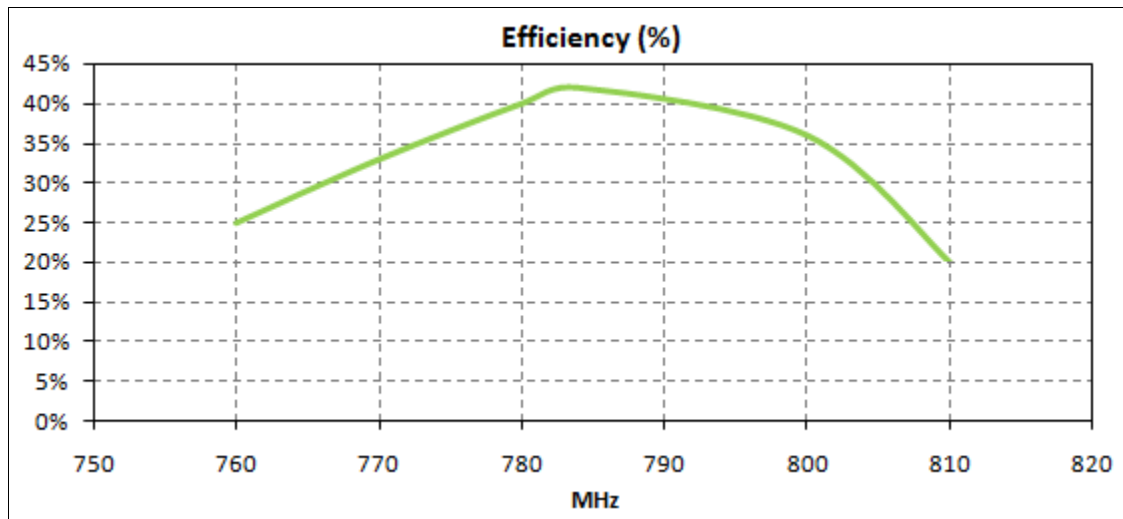

**Figure 6.** Efficiency for the FXP270 Antenna.

## E. Gain Data

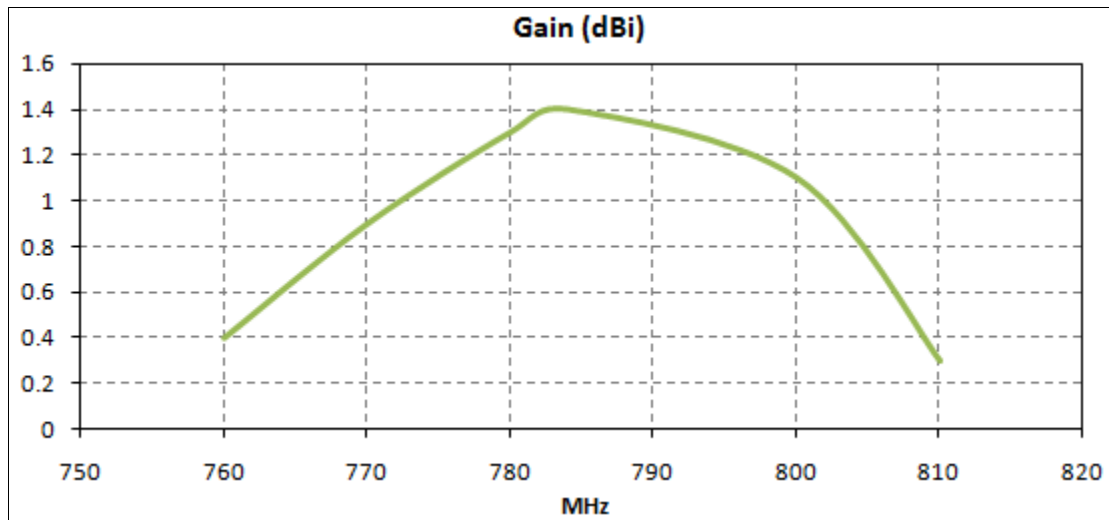


Figure 7. Gain for the FXP270 Antenna.

## F. Radiation Pattern Data.



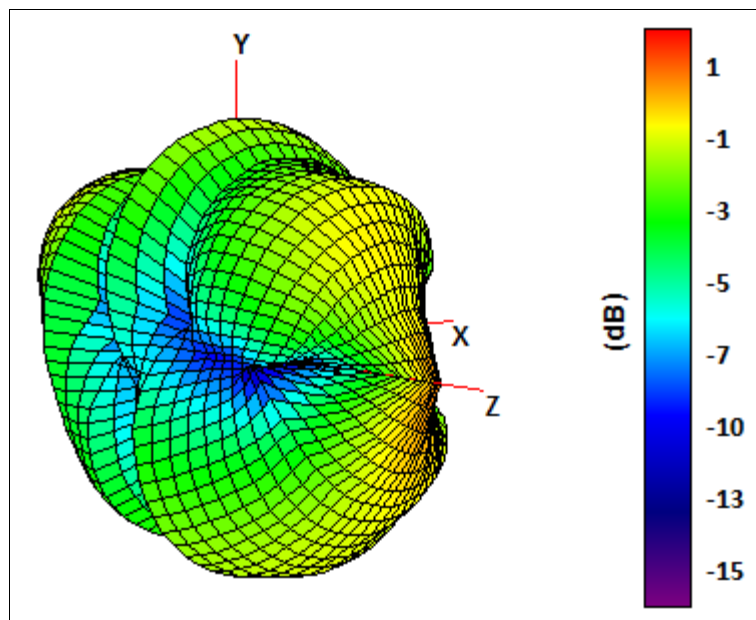


Figure 8. Radiation pattern 3D View, Figure 1 as reference (dB).

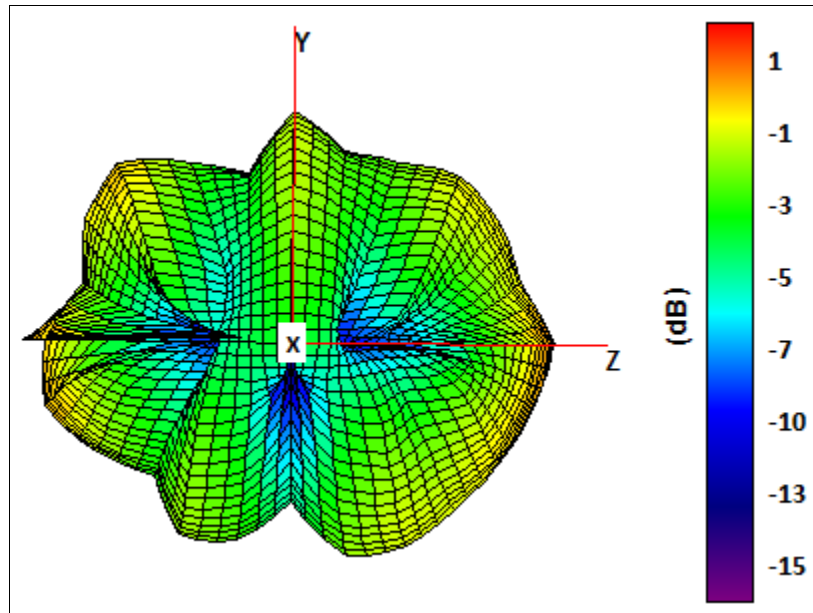


**Figure 9.** Radiation pattern YZ Plane, Figure 1 as reference (dB).

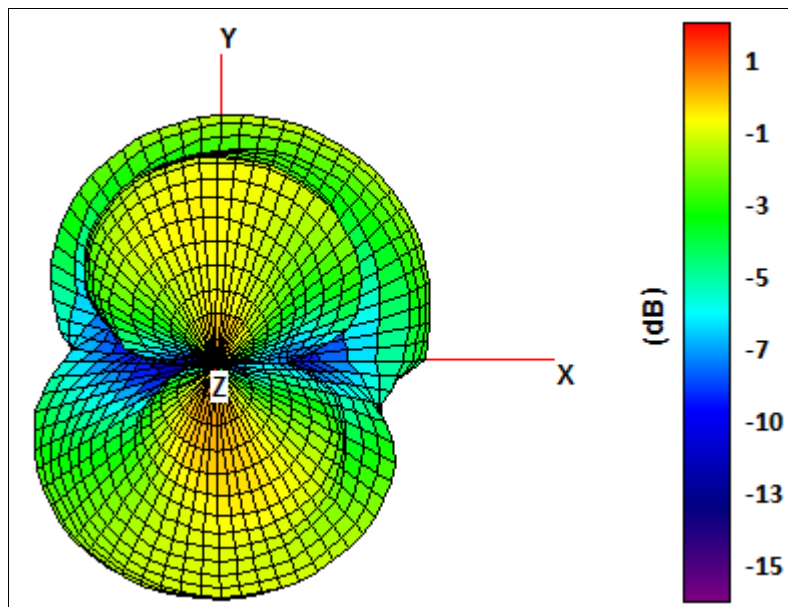

**Figure 10.** Radiation pattern XY plane, Figure 1 as reference (dB).



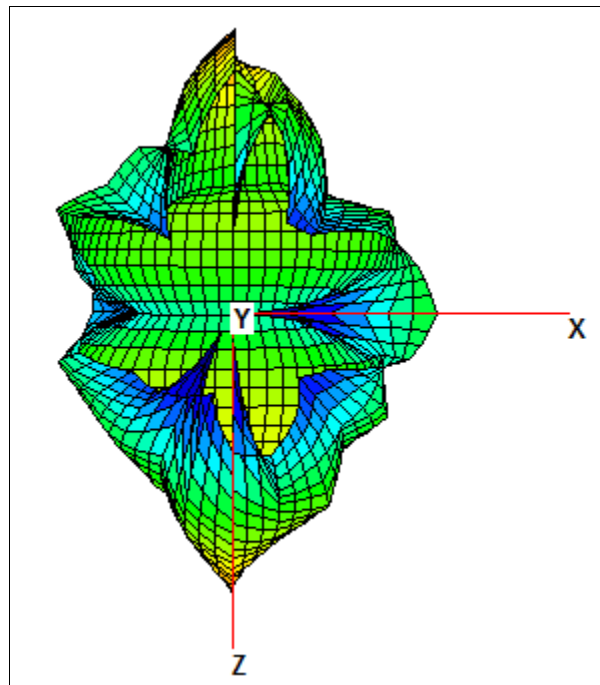

**Figure 11.** Radiation pattern XY plane, Figure 1 as reference (dB).