



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NLP150L Series

Quad output

Total Power: 110-150W
Input Voltage: 90 - 264VAC
of Outputs: Quad

Special Features

- 90 VAC to 264 VAC universal input range
- Provides low voltage outputs (3.3 V)
- EN61000-3-2 compliant
- Overvoltage and short circuit protection
- Power fail detection
- Current sharing (on VA and VB)
- 3.8 x 7.8 x 1.26 inches
- UL, CSA and VDE safety approvals and CE-marked to LVD
- Compliance to EN55022-B conducted noise standard
- Compliance to EN55022-A radiated noise standard
- Meets all applicable and relevant immunity standards EN61000-4-2, -3, -4, -5 and -6
- Available RoHS compliant
- 2 year warranty

Safety

VDE 0805/EN60950/IEC950
File No. 10401-3336-0162/47587
Licence No. 123897

UL1950 File No. E136005

CSA C22.2 No. 950
File No. LR41062C



The NLP150L series of 150 Watt ac-dc open-frame power supplies are available with single, triple or quad outputs. The quad output versions described in this datasheet are housed in a 3.8 x 7.8 x 1.26 inch package. All NLP150L series power supplies are harmonic current corrected to meet the EN61000-3-2 standard, and support current sharing. The power supplies are designed for use in 1U shelves or boxes, and are primarily intended for networking applications that have a heavy logic content, such as access concentrators, midrange routers, LAN switches and shared media hubs.



Specifications

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATIONS

Total regulation (Line and load)	Main output Auxiliary outputs	±2.0% ±5.0%
Rise time	At turn-on	1.5 s, max.
Transient response	Main output 75% to 100% step at 0.1 A/μs	5.0% or 250 mV max. dev., 1 ms max. recovery to 1%
Temperature coefficient		±0.02%/°C
Overvoltage protection	Main outputs	125%, ±10%
Short circuit protection	Cyclic operation	Continuous
Minimum output current	Single and multiple	See table

INPUT SPECIFICATIONS

Input voltage range	Universal input	90-264 Vac
Input frequency range		47-63 Hz
Input surge current	264 Vac (cold start)	40 A max.
Safety ground leakage current	264 Vac, 60Hz	0.99 mA
Input current	120 Vac @ 150 W 230 Vac @ 150 W	1.95 A rms 1.10 A rms
Input fuse	UL/IEC127	F3.15A H, 250 Vac

EMC CHARACTERISTICS ⁽¹⁰⁾

Conducted emissions	EN55022, FCC part 15	Level B
Radiated emissions	EN55022, FCC part 15	Level A
Harmonic current emission correction	EN61000-3-2	Compliant
ESD air	EN61000-4-2	Level 3
ESD contact	EN61000-4-2	Level 3

EMC CHARACTERISTICS (continued) ⁽¹⁰⁾

Surge	EN61000-4-5	Level 3
Fast transients	EN61000-4-4	Level 3
Radiated immunity	EN61000-4-3	Level 3
Conducted immunity	EN61000-4-6	Level 3

GENERAL SPECIFICATIONS

Hold-up time	120 Vac @ 60 Hz	20 ms @ 150 W
Efficiency	120 Vac @ 150 W	73% typical
Isolation voltage	Input/output Input/chassis	3000 Vac 1500 Vac
Approvals and standards pending	EN60950, VDE0805, IEC950 UL1950, CSA C22.2 No. 950	
Weight	540 g (19 oz)	
MTBF (@ 25°C)	MIL-HDBK-217F Bellcore	350,000 hours min. 800,000 hours min.

ENVIRONMENTAL SPECIFICATIONS ⁽⁸⁾

Thermal performance	Operating ambient, (See derating curve) Non-operating 50 °C to 70 °C ambient, convection cooled 0 °C to 50 °C ambient, convection cooled 0 °C to 50 °C ambient, 300 LFM forced air Peak (0 °C to +50 °C)	0 °C to +50 °C -40 °C to +85 °C Derate to 50% load 110 W 150 W
Relative humidity	Non-condensing	5% to 95% RH
Altitude	Operating Non-operating	10,000 feet max. 30,000 feet max.
Vibration (See Note 6)	5-500 Hz	2.4 G rms peak
Shock	per MIL-STD-810E	516.4 Part IV


Specifications Contd.

Rev.02.20.07
NLP150L Series
3 of 5

OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE (4)	TOTAL REGULATION	MODEL NUMBERS (12,13)
	MIN (5)	MAX (1)	300 LFM (2)			
5.1 V (V _A)	1.5 A	20 A	30 A	50 mV	±2.0%	NLP150L-96Q5366Y
+3.3 V (V _B)	0.5 A	10 A	15 A	50 mV	±2.0%	
+12 V (V _C)	0 A	2 A	3 A	120 mV	±5.0%	
12 V, _{ISO} (V _D)	0 A	0.65 A	1 A	120 mV	±5.0%	



Notes

- Free air convection.
Multiple output units: maximum continuous output power not to exceed 110 W and the output current not to exceed: $I_A + I_B + 2(I_C + I_D) \leq 23$ A.
300 LFM forced air cooling from the longer side.
- Multiple output units: maximum continuous output power not to exceed 150 W and the output current not to exceed: $I_A + I_B + 2(I_C + I_D) \leq 32$ A.
- Peak output current lasting less than 30 seconds with duty cycle less than 5%. During peak loading, output voltage may exceed total regulation limits.
- Figure is peak-to-peak for room temperature rating. Output noise measurements are made across a 20 MHz bandwidth using a 6 inch twisted pair, terminated with a 10 μ F electrolytic capacitor and a 0.1 μ F ceramic capacitor.
- Minimum load required for correct start-up and operation on single outputs and on main output of multiple versions. Failure to observe minimum load on main output will not allow the supply to start-up correctly. Some electronic test loads have a large delay time before they start drawing current even though the voltage from the supply is present. During this time delay, there is no load on the output and as a result, the supply may not be able to start-up properly and maintain its correct output voltage. In these instances, a dummy resistive load across the output may be necessary to load the output of the supply until the test load can function correctly and draw the intended minimum load. Minimum load required on auxiliary outputs to maintain regulation.
- Three orthogonal axes, random vibration 10 minutes for each axes, 2.4 G rms 5 Hz to 500 Hz.
- For optimum reliability no part of the heatsink should exceed 110 °C and no semi-conductor case temperature should exceed 120 °C.
- CAUTION: Allow a minimum of 1 second after disconnecting line power when making thermal measurements.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- Conducted EMI specifications reference measurements made with the power supply mounted on a grounded metal sheet extending 1 inch beyond each edge, using an unshielded cable. No external filtering required during conducted emissions testing but some applications may require additional filtering to achieve system compliance. Compliance with Radiated EMI specifications may require mounting in a suitable enclosure.
- All models require a minimum mounting stand-off of 6.35 mm (0.25 inches) in the end use product.
- The 'Y' suffix indicates that these parts are non Pb-free (RoHS 5/6) compliant. RoHS 6/6 (Pb-free) compliant versions are also available by replacing the suffix 'Y' with the suffix 'J' e.g. NLP150L-96Q5366J.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

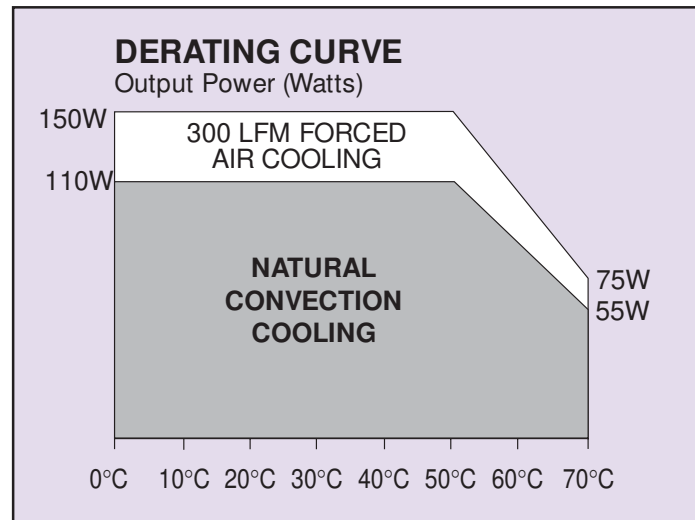

Mechanical Notes

A All dimensions are in inches (mm).

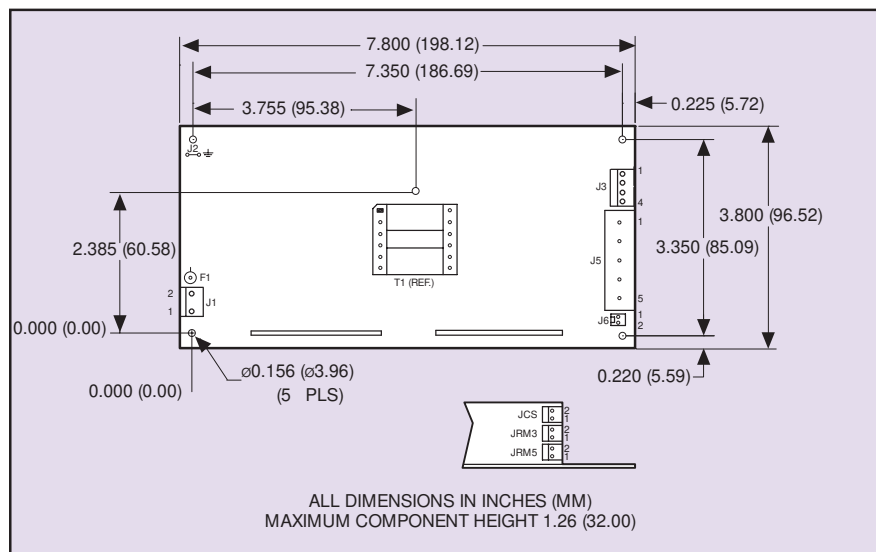

Recommended direction for forced air relative to power supply orientation shown below.

- 1 Best.
- 2 Good.
- 3 Not recommended.
- 4 Not recommended.

CONNECTOR AND MATING CONNECTOR TYPES

CONNECTOR	TYPE	MATING CONNECTOR TYPE
J1	Molex 26-60-4030 or equivalent	Molex 09-50-3031 or equivalent with Molex 08-50-0105 or equivalent crimp terminals
J2	Male 0.250 quick disconnect	Molex 22-01-AA-5261, AA22-01 or equivalent
J3	Molex 26-60-4040 or equivalent	Molex 09-50-3041 or equivalent with Molex 2478 phosphor bronze or equivalent crimp terminals
J5	Beau Interconnect 70505-C-50 or equivalent	70 5 05-C50
J6	Molex 22-23-3021 or equivalent	Molex 22-01-2021 and contact 08-50-0113 terminals or equivalent
JRM3, JRM5 & JCS	Leoco 2421P02H000 or equivalent	Leoco 2420S02000 and contact 2453TPB00V1

J1 PIN CONNECTIONS

Pin 1	Neutral
Pin 2	Void
Pin 3	Line

J3 PIN CONNECTIONS

Pin 1	V_D Positive
Pin 2	V_D RTN
Pin 3	V_C Positive
Pin 4	V_C RTN

Note: V_D is a floating output.
It can be configured as positive or negative

J5 PIN CONNECTIONS

Pin 1	V_A Positive
Pin 2	V_A Positive
Pin 3	Main RTN
Pin 4	Main RTN
Pin 5	V_B Positive

JRM5 PIN CONNECTIONS

Pin 1	V_A Sense +
Pin 2	V_A Sense -

J6 PIN CONNECTIONS

Pin 1	Signal
Pin 2	RTN

JCS PIN CONNECTIONS

Pin 1	Load A Current Sharing
Pin 2	Load B Current Sharing

JRM3 PIN CONNECTIONS

Pin 1	V_B Sense +
Pin 2	V_B Sense -

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

16th - 17th Floors, Lu Plaza
2 Wing Yip Street, Kwun Tong
Kowloon, Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com

technicalsupport@powerconversion.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- **Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower. com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2007 Emerson Electric Co.