



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Single 16-Ch/Differential 8-Ch CMOS Analog Multiplexers

(Obsolete for non-hermetic. Use DG406/407 as pin-for-pin replacements.)

FEATURES

- Low On-Resistance: 240 Ω
- TTL and CMOS Logic Compatible
- Low Power: 30 mW
- Break-Before-Make Switching
- 44-V Power Supply Rating
- Transition Time: 600 ns

BENEFITS

- Easily Interfaced
- Low Power Consumption
- Low System Crosstalk
- Wide Analog Signal Range

APPLICATIONS

- Communication Systems
- ATE
- Data Acquisition Systems
- Audio Signal Routing and Multiplexing
- Medical Instrumentation

DESCRIPTION

A channel in the on state conducts current equally well in both directions. In the off state each channel blocks voltages up to the power supply rails, normally 30 V peak-to-peak. An enable (EN) function allows for device selection when several multiplexers are used. All control inputs, address (A_x) and enable (EN) are TTL or CMOS compatible over the full specified operating temperature range.



The DG506A_MIL/507A_MIL are fabricated in the Vishay Siliconix PLUS-40 process, which includes improved

ESD protection for ruggedness. An epitaxial layer prevents latch up.

The DG506A_MIL/507A_MIL are available in hermetic packages. For plastic packages, use the DG406/407 as pin-for-pin replacements.

For wideband/video multiplexing, the DG536 is recommended.

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

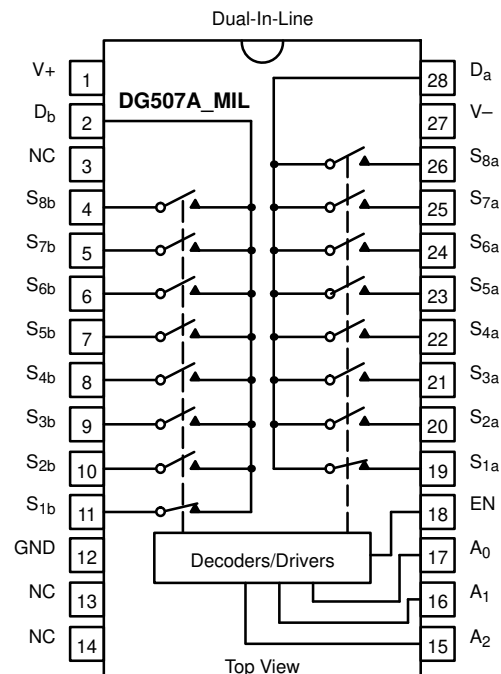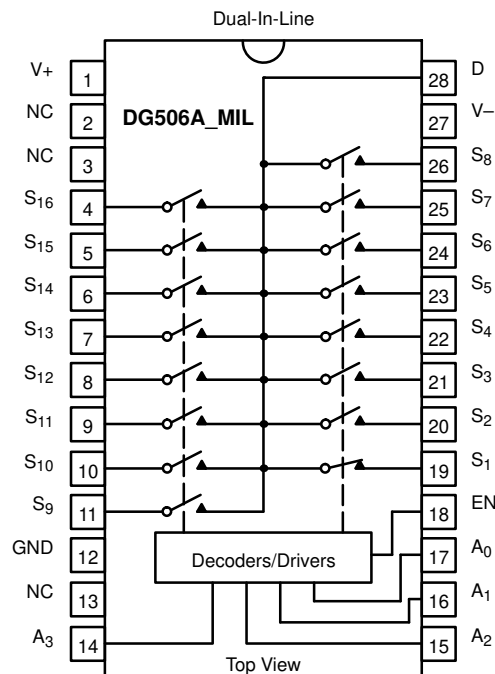

TRUTH TABLES AND ORDERING INFORMATION
TRUTH TABLE — DG506A_MIL

A ₃	A ₂	A ₁	A ₀	EN	On Switch
X	X	X	X	0	None
0	0	0	0	1	1
0	0	0	1	1	2
0	0	1	0	1	3
0	0	1	1	1	4
0	1	0	0	1	5
0	1	0	1	1	6
0	1	1	0	1	7
0	1	1	1	1	8
1	0	0	0	1	9
1	0	0	1	1	10
1	0	1	0	1	11
1	0	1	1	1	12
1	1	0	0	1	13
1	1	0	1	1	14
1	1	1	0	1	15
1	1	1	1	1	16

TRUTH TABLE — DG507A_MIL

A ₂	A ₁	A ₀	EN	On Switch
X	X	X	0	None
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

Logic "0" = V_{AL} ≤ 0.8 VLogic "1" = V_{AH} ≥ 2.4 V

X = Don't Care

ORDERING INFORMATION — DG506A_MIL

Temp Range	Package	Part Number
-55 to 125°C	28-Pin CerDIP	DG506AAK
		DG506AAK/883
	28-Pin Sidebrazed	JM38510/19001BXC
	LCC-28*	DG506AAZ/883

*Block Diagram and Pin Configuration not shown.

ORDERING INFORMATION — DG507A_MIL

Temp Range	Package	Part Number
-55 to 125°C	28-Pin CerDIP	DG507AAK
		DG507AAK/883
	28-Pin Sidebrazed	JM38510/19003BXC
	28-Pin LCC	DG507AAZ/883

ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-

V+ 44 V

GND 25 V

Digital Inputs^a, V_S, V_D (V-) -2 V to (V+) +2 V or
20 mA, whichever occurs first

Current (Any Terminal, Except S or D) 30 mA

Continuous Current, S or D 20 mA

Peak Current, S or D

(Pulsed at 1 ms, 10% Duty Cycle Max) 40 mA

Storage Temperature (CerDIP) -65 to 150°C
(Plastic DIP) -65 to 125°CPower Dissipation (Package)^b

28-Pin CerDIP and Sidebrazed 1200 mW

28-Pin PLCC^{NO TAG} 1200 mW

LCC-20,28° 1000 mW

Notes:

- Signals on S_X, D_X or I_{NX} exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- All leads soldered or welded to PC board.
- Derate 14 mW/°C above 75°C.

**SPECIFICATIONS^a**

Parameter	Symbol	Test Conditions Unless Otherwise Specified V ₊ = 15 V, V ₋ = -15 V V _{IN} = 2.4 V, 0.8 V ^f		Temp ^b	A Suffix -55 to 125°C			Unit
					Min ^d	Typ ^c	Max ^d	
Analog Switch								
Analog Signal Range ^e	V _{ANALOG}			Full	-15		15	V
Drain-Source On-Resistance	r _{DS(on)}	V _D = ± 10 V, I _S = -200 μA		Room Full		240	400 500	Ω
r _{DS(on)} Matching ^g	Δr _{DS(on)}	-10 V < V _S < 10 V		Room		6		%
Source Off Leakage Current	I _{S(off)}	V _S = ± 10 V, V _D = ∓ 10 V V _{EN} = 0 V		Room Full	-1 -50		1 50	nA
Drain Off Leakage Current	I _{D(off)}	V _D = ∓ 10 V V _S = ± 10 V V _{EN} = 0 V	DG506A_MIL	Room Full	-10 -300		10 300	
			DG507A_MIL	Room Full	-5 -200		5 200	
Drain On Leakage Current	I _{D(on)}	V _S = V _D = ± 10 V	DG506A_MIL	Room Full	-10 -300		10 300	
			DG507A_MIL	Room Full	-5 -200		5 200	
Digital Control								
Logic Input Current Input Voltage High	I _{AH}	V _A = 2.4 V		Room Full	-10 -30			μA
		V _A = 15 V		Room Full			10 30	
Logic Input Current Input Voltage Low	I _{AL}	V _{EN} = 0 V, 2.4 V, V _A = 0 V		Room Full	-10 -30			
Dynamic Characteristics								
Transition Time	t _{TRANS}	See Figure 2		Room		0.6	1.0	μs
Break-Before-Make Time	t _{OPEN}	See Figure 4		Room		0.2		
Enable Turn-On Time	t _{ON(EN)}	See Figure 3		Room		1	1.5	
Enable Turn-Off Time	t _{OFF(EN)}			Room		0.4	1.0	
Charge Injection	Q			Room		6		pC
Off Isolation ^h	OIRR	V _{EN} = 0 V, R _L = 1 kΩ, C _L = 15 pF V _S = 7 V _{RMS} , f = 500 kHz		Room		68		dB
Source Off Capacitance	C _{S(off)}	V _{EN} = 0 V, V _S = 0 V, f = 140 kHz		Room		6		pF
Drain Off Capacitance	C _{D(off)}	V _{EN} = 0 V V _D = 0 V f = 140 kHz	DG506A_MIL	Room		45		
			DG507A_MIL	Room		23		
Power Supplies								
Positive Supply Current	I ₊	V _{EN} = 0 V, V _A = 0 V		Room		1.3	2.4	mA
Negative Supply Current	I ₋			Room	-1.5	-0.7		







Notes:







- a. Refer to PROCESS OPTION FLOWCHART.
b. Room = 25°C, Full = as determined by the operating temperature suffix.
c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
e. Guaranteed by design, not subject to production test.
f. V_{IN} = input voltage to perform proper function.

$$g. \Delta r_{DS(on)} = \left(\frac{r_{DS(on)MAX} - r_{DS(on)MIN}}{r_{DS(on)AVE}} \right)$$

- h. Off isolation = $20 \log \frac{V_D}{V_S}$, V_S = input to off switch, V_D = output due to V_S .

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

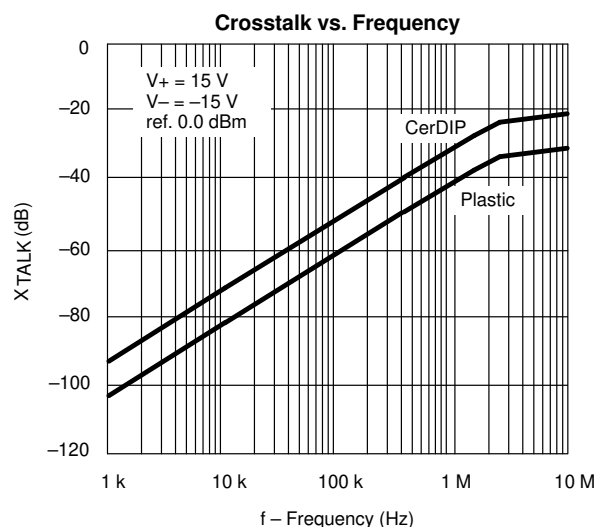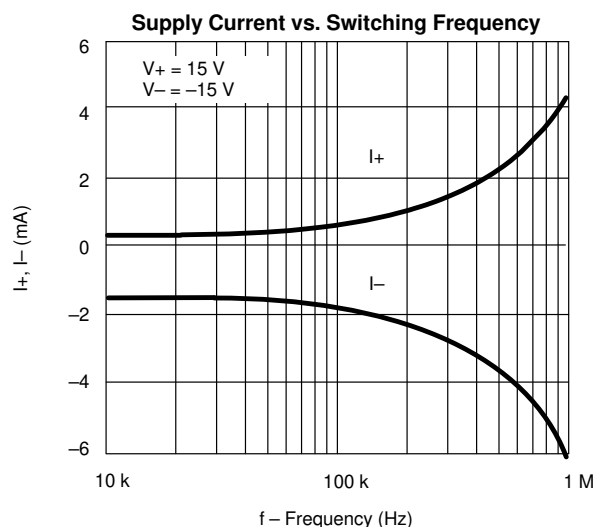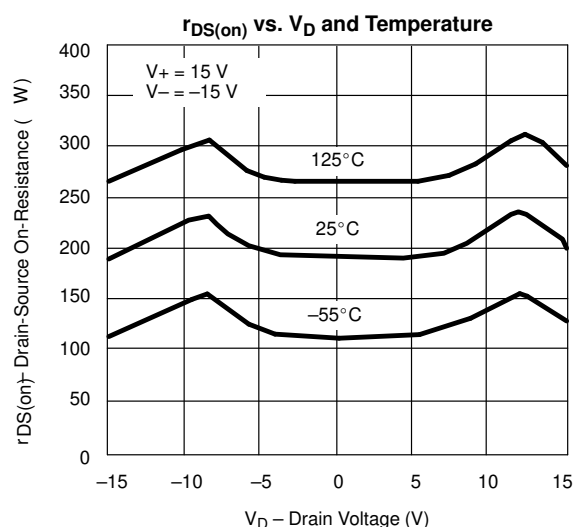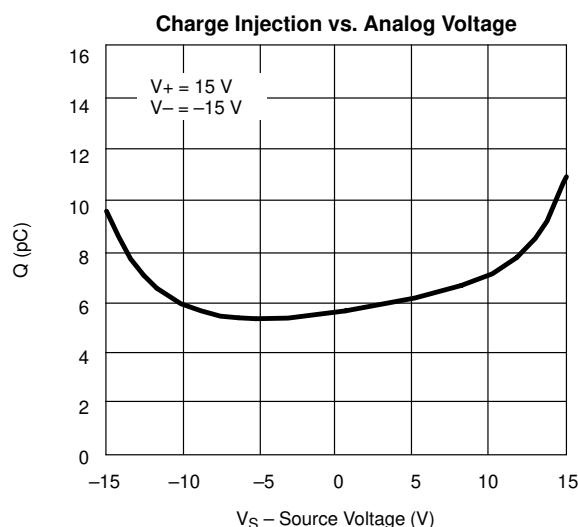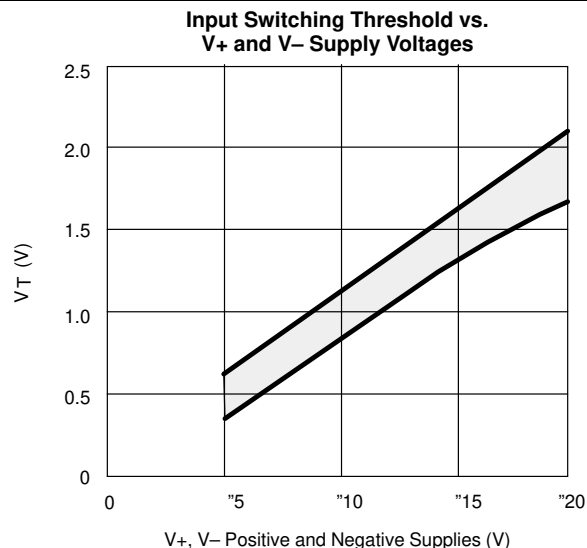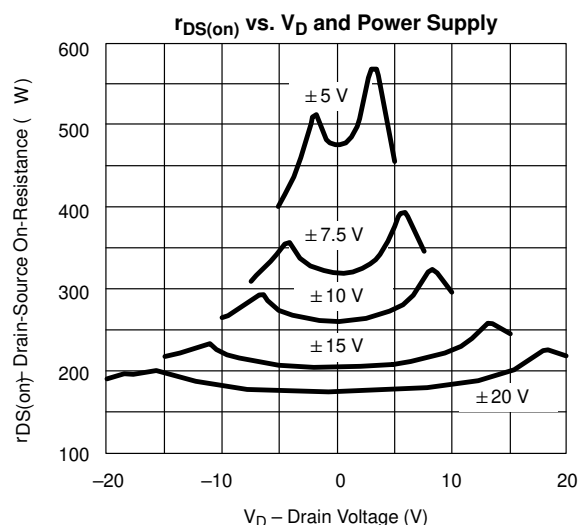

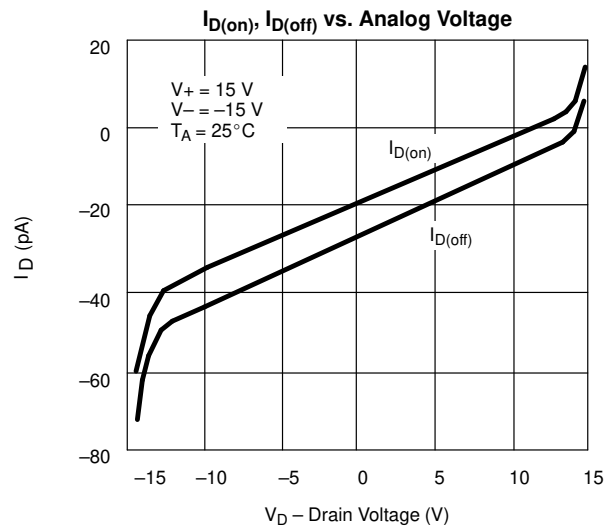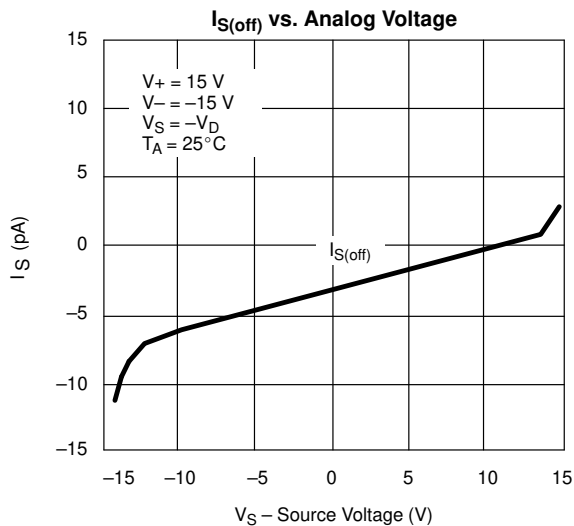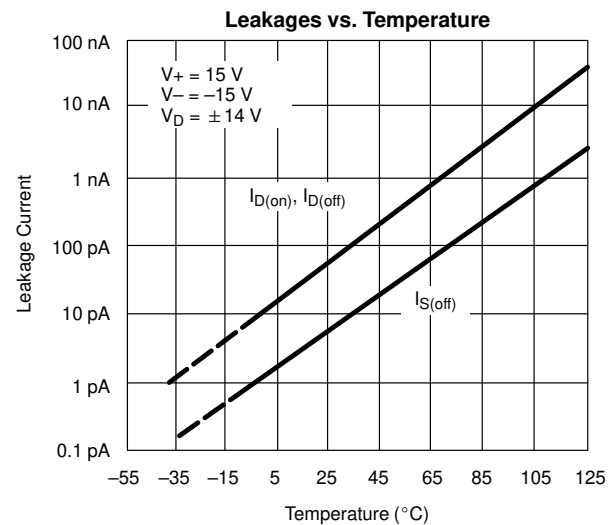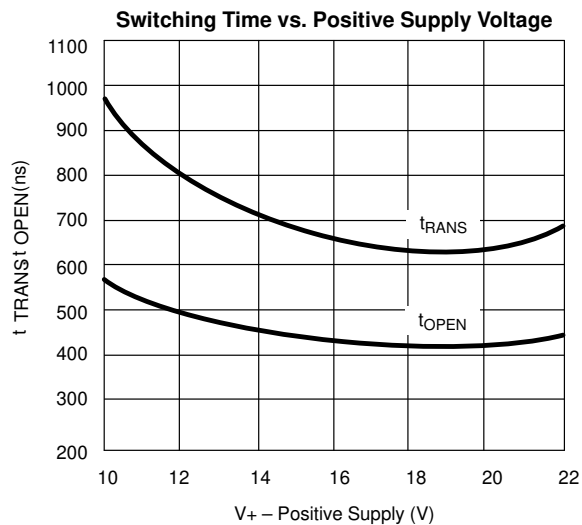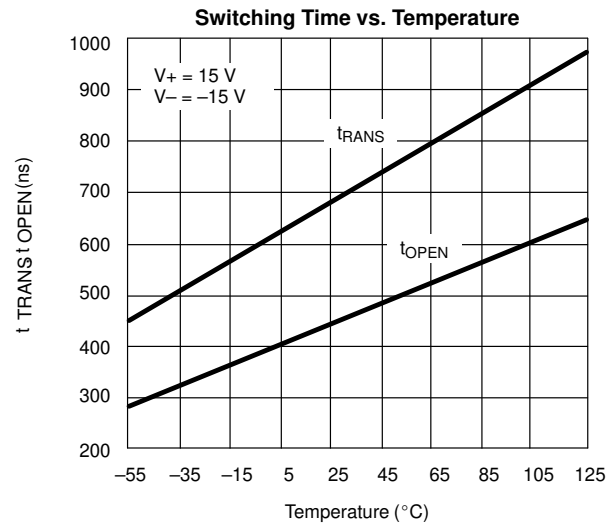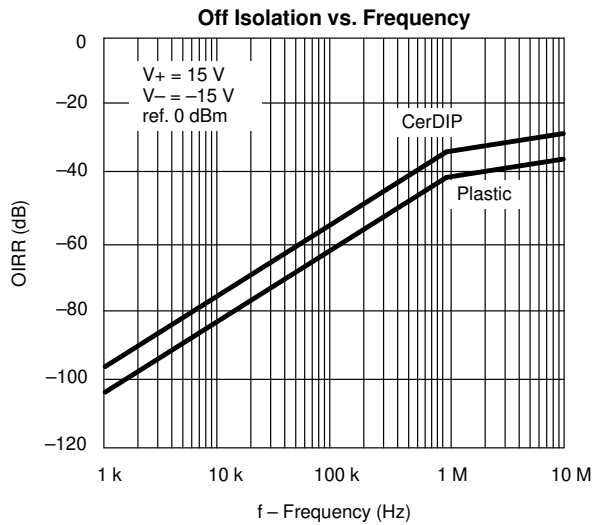**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

SCHEMATIC DIAGRAM (TYPICAL CHANNEL)


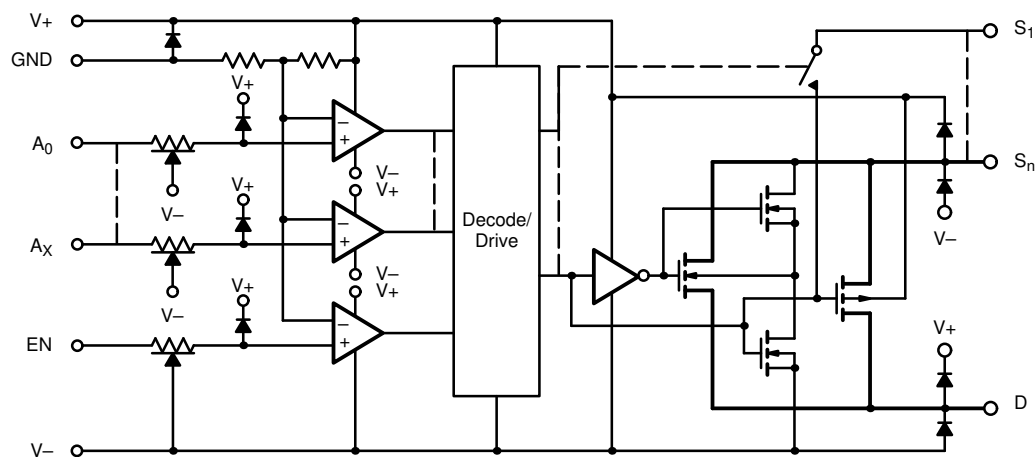


FIGURE 1.

TEST CIRCUITS

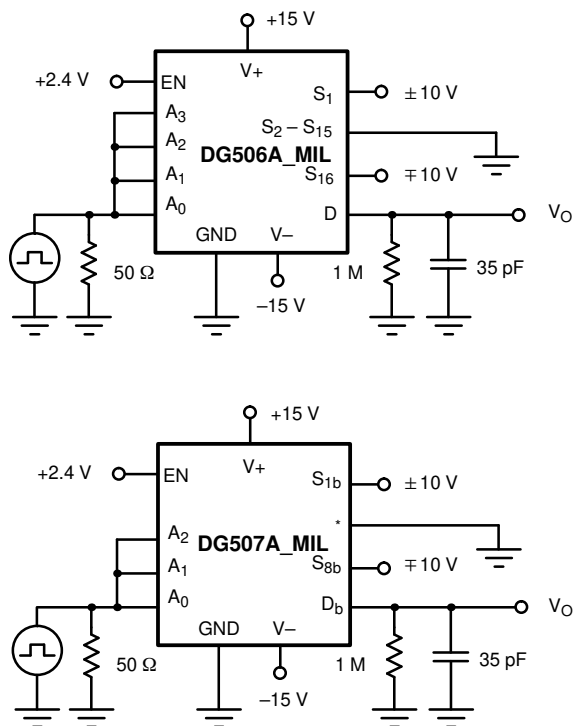

* = S_{1a} - S_{8a}, S_{2b} - S_{7b}, D_a

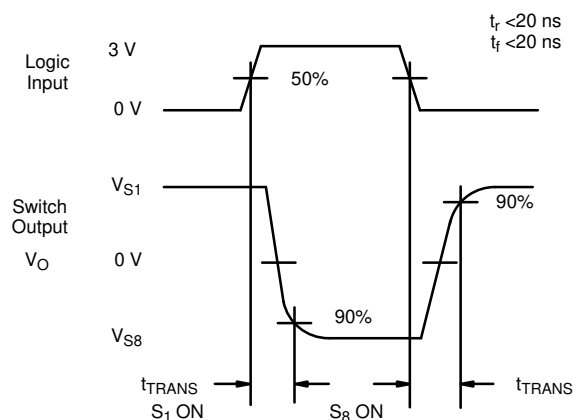
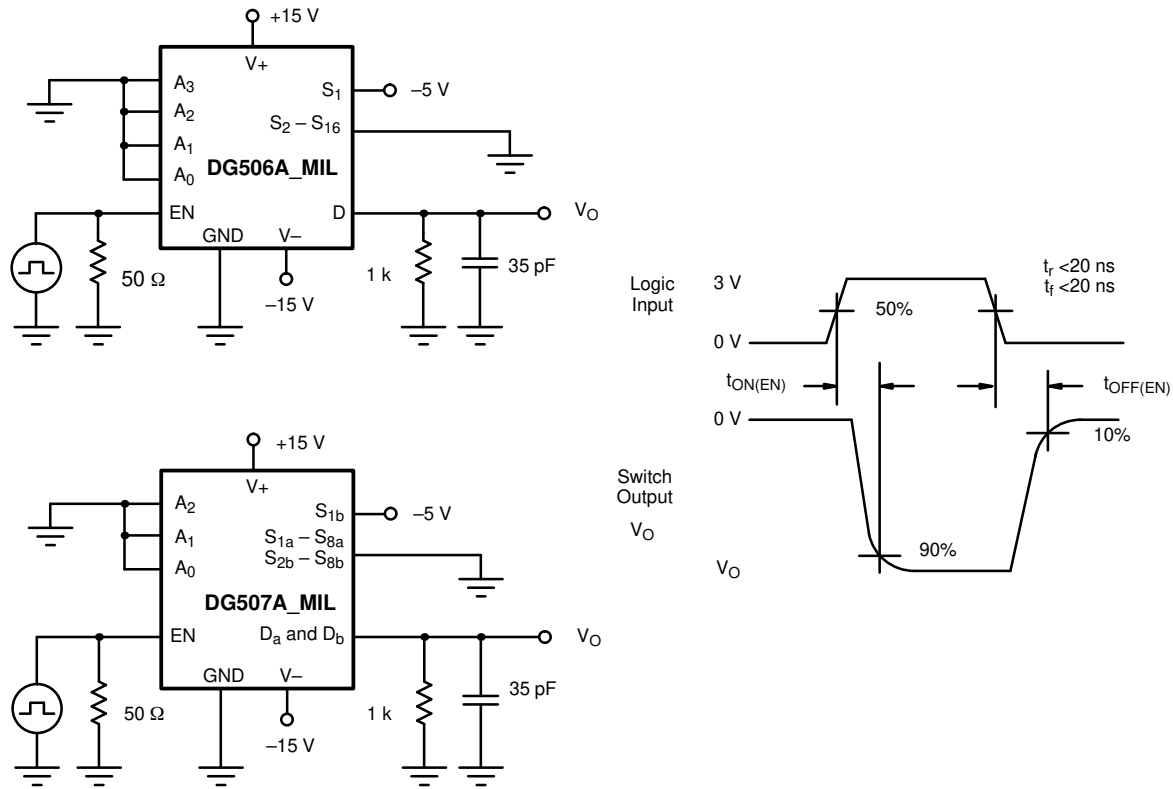
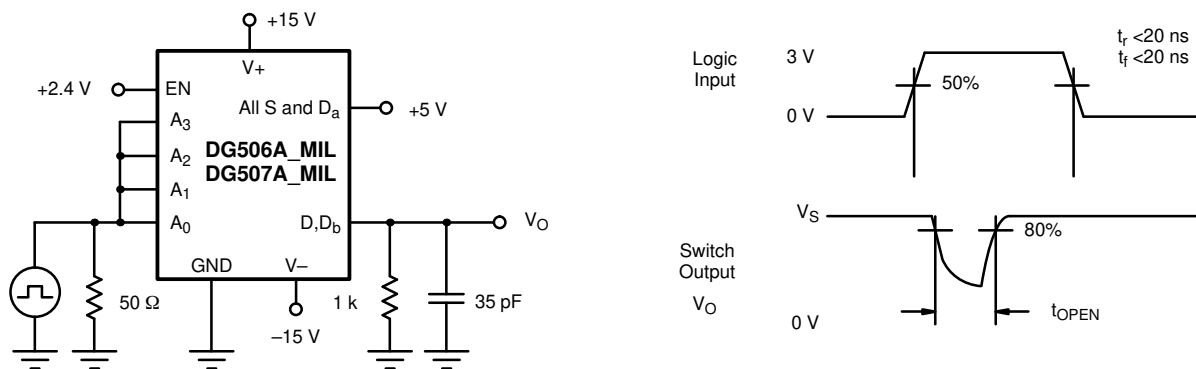


FIGURE 2. Transition Time

TEST CIRCUITS

FIGURE 3. Enable Switching Time

FIGURE 4. Break-Before-Make Interval

APPLICATION HINTS ^a			
V ₊ Positive Supply Voltage (V)	V ₋ Negative Supply Voltage (V)	V _{IN} Logic Input Voltage V _{INH(min)} /V _{INL(max)} (V)	V _S or V _D Analog Voltage Range (V)
15 ^b	-15	2.4/0.8	-15 to 15
12	-12	2.4/0.8	-12 to 12
10	-10	2.2/0.6	-10 to 10
8 ^c	-8	2.0/0.5	-8 to 8

Notes:

- Application Hints are for DESIGN AID ONLY, not guaranteed and not subject to production testing.
- Electrical Parameter Chart based on V₊ = 15 V, V₋ = -15 V.
- Operation below ±8 V is not recommended due to shift in V_{INL(MAX)}.

Overvoltage Protection

A very convenient form of overvoltage protection consists of adding two small signal diodes (1N4148, 1N914 type) in series with the supply pins (see Figure 5). This arrangement effectively blocks the flow of reverse currents. It also floats the supply pin above or below the normal V₊ or V₋ value. In this case the overvoltage signal actually becomes the power supply of the IC. From the point of view of the chip, nothing has changed, as long as the difference between V_S and the V₋ rail doesn't exceed +44 V. The addition of these diodes will reduce the analog signal range to 1 V below V₊ and 1 V above V₋, but it preserves the low channel resistance and low leakage characteristics.

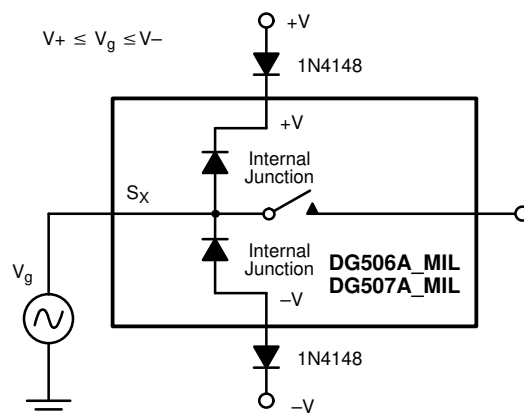


FIGURE 5. Overvoltage Protection Using Blocking Diodes

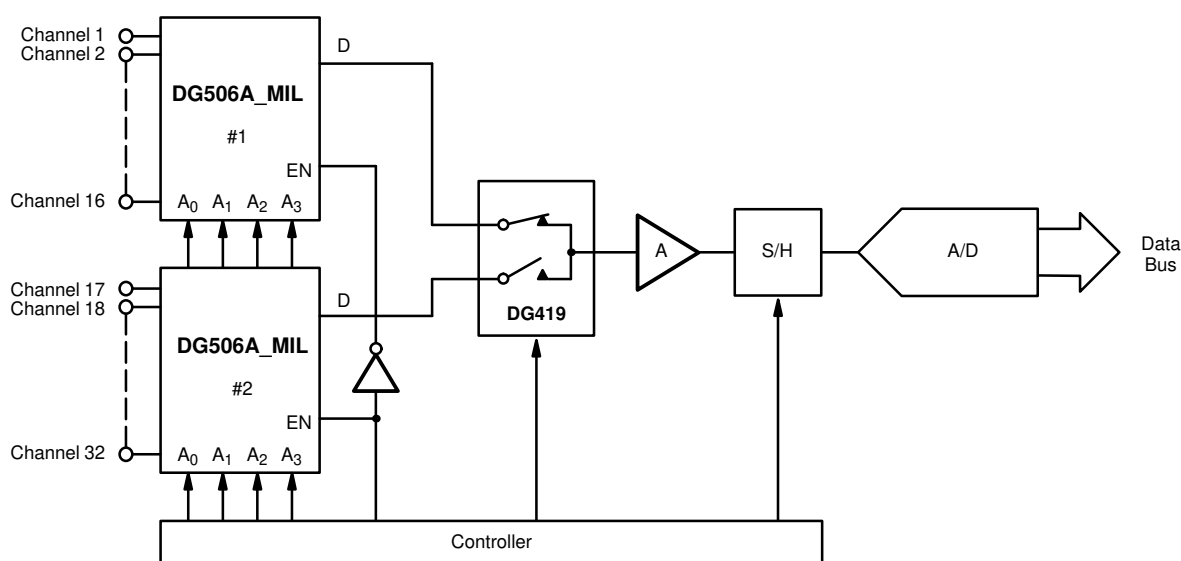


FIGURE 6. A 32-Channel Data Acquisition System



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.