



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



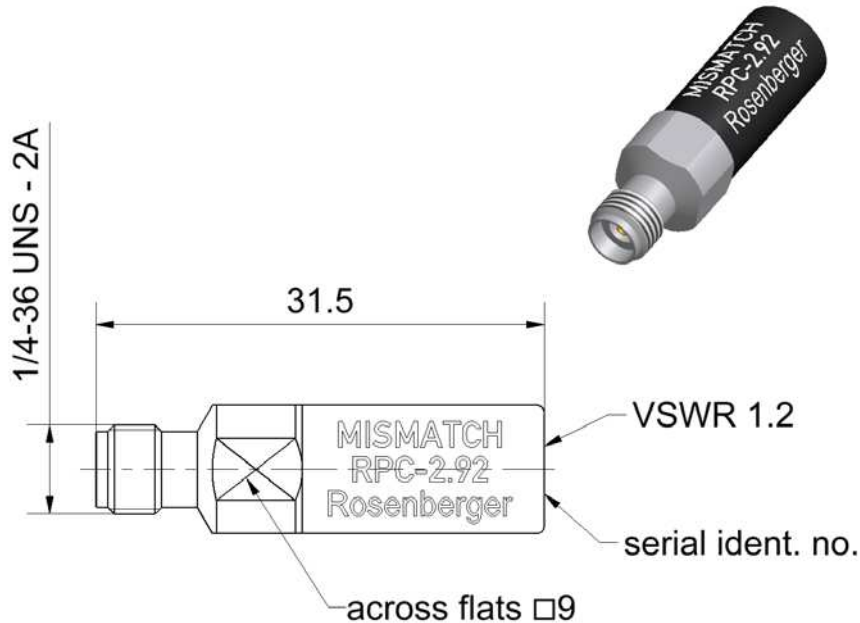

All dimensions are in mm; tolerances according to ISO 2768 m-H

#### Interface

According to  
Mechanically compatible with

IEC 61169-35  
RPC-3.50 and SMA

#### Documents

Application note

AN001 "Calibration Services"

#### Material and plating

##### Connector parts

Center conductor  
Outer conductor  
Dielectric  
Substrate

##### Material

CuBe  
Stainless steel  
PS  
Al<sub>2</sub>O<sub>3</sub>

##### Plating

Gold, min. 1.27 µm, over nickel  
Passivated

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG  
RF\_35/09.14/6.2

Technical Data Sheet				Rosenberger			
RPC-2.92		Mismatch Jack		02K150-060S3			
<div>Electrical data</div> <div>Frequency rangeDC to 40 GHz</div> <div>VSWR1.2 ± 0.04, DC to 4 GHz 1.2 ± 0.05, 4 GHz to 18 GHz 1.2 ± 0.08, 18 GHz to 40 GHz</div> <div>DC Resistance60 Ω</div> <div>Power handling≤ 0.5 W</div> <div>Mechanical data</div> <div>Mating cycles≥ 500</div> <div>Maximum torque1.70 Nm</div> <div>Recommended torque0.90 Nm</div> <div>Gauge0.00 mm to 0.03 mm</div> <div>Environmental data</div> <div>Operating temperature range<sup>1</sup>+20 °C to +26 °C</div> <div>Rated temperature range of use<sup>2</sup>0 °C to +50 °C</div> <div>Storage temperature range-40 °C to +85 °C</div> <div>RoHScompliant</div> <div><sup>1</sup> Temperature range over which these specification are valid.</div> <div><sup>2</sup> This range is underneath and above the operating temperature range, within the mismatch is fully functional and could be used without damage.</div> <div>Declaration of calibration options</div> <div>Factory Calibration</div> <div>Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards.</div> <div>Accredited Calibration</div> <div>Optional this calibration standard can be delivered with an Accredited Calibration (DAkkS) having the highest confidence in the traceability. The DAkkS Calibration Certificate issued reports individual calibration results in a complex format, traceable to national / international standards. Calibration results are reported in a dense data set file. The uncertainties are smaller than in a Factory Calibration.</div> <div>For further, more detailed information see application note AN001 on the Rosenberger homepage.</div> <div>Calibration interval</div> <div>Recommendation12 months</div> <div>Packing</div> <div>Standard1 pce in box</div> <div>Weight8.0 g/pce</div>							
<div>While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.</div>							
Draft		Date		Approved		Date	
Herbert Babinger		09.12.14		Martin Moder		09.12.14	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2