

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








TECHNICAL DATA SHEET - Draft

Rosenberger

ADAPTOR FMC PLUG - SMA JACK

16S132-K00L5



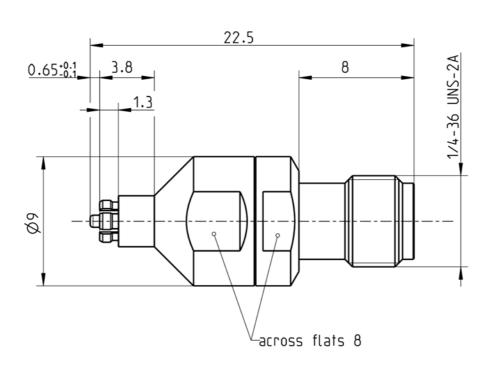

All dimensions are in mm; tolerances according to ISO 2768 m-H

			•			
ľ	7	΄ Δ	rt	9	\sim	١
		o		а	ce	7

According to FMC side: SMA side:

N/A

IEC 60169-15; EN 122110; MIL-STD-348A, Fig. 310

Documents

Assembly instruction

N/A

Material and plating

Connector parts
Center contact
Outer contact

Dielectric

Material Plating

Beryllium copper AuroDur, gold plated Beryllium copper AuroDur, gold plated

PTFE

TECHNICAL DATA SHEET - Draft

Rosenberger

2/2

ADAPTOR FMC PLUG – SMA JACK

16S132-K00L5

Electrical data

Impedance 50 Ω

Frequency DC to 10 GHz
Return loss ≥ 29 dB, DC to 6 GHz

≥ 26 dB, 6 to 10 GHz

Insertion loss $\leq 0.1 \text{ dB x } \sqrt{\text{f [GHz]}}$

 $\begin{array}{lll} \mbox{Insulation resistance} & \geq 5 \ \mbox{x} 10^3 \ \mbox{M}\Omega \\ \mbox{Center contact resistance} & \leq 6 \ \mbox{m}\Omega \\ \mbox{Outer contact resistance} & \leq 2 \ \mbox{m}\Omega \\ \mbox{Test voltage} & 500 \ \mbox{V rms} \\ \mbox{Working voltage} & 335 \ \mbox{V rms} \\ \end{array}$

RF-leakage ≤ -80 dB up to 3 GHz

 \leq -65 dB up to 10 GHz

Contact current 1.2 A DC max.

Mechanical data

FMC side SMA side Mating cycles min. 100 min. 500 Engagement force Smooth bore 9 N max. N/A Limited detent 45 N max. N/A

Full detent 68 N max. N/A Smooth bore 2.2 N min. N/A Limited detent 9 N min. N/A Full detent 22 N min N/A \geq 27 N \geq 27 N

Environmental data

Disengagement force

Temperature range -40°C to +105°C

Rapid change of temperature IEC 60169-1 clause 16.4 (-40°C to +105°C)

Mixed flowing gas DIN EN 60068-2-60 meth. 4 (10 d)

Vibration IEC 61169-1 clause 9.3.3 (10-2000 Hz; 15g) Shock IEC 60169-1 clause 15.8 (50g 11 ms half-sine)

Damp heat IEC 60169-1 clause 16.3 (+40°C 56 d)

2002/95/EC (RoHS) compliant

Suitable cables

www.rosenberger.de

N/A

Weight

Weight 4.4 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Andreas Fellner	29/09/05	T. Krojer	11.03.14		700	14-0352	T. Krojer	11.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG					Te	Tel.: +49 8684 18-0		
P.O.Box 1260 D-84526 Tittmoning Germany					Fa	ax: +49 8684 18-499		

email: info@rosenberger.de