



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MAX20335 Evaluation Kit

Evaluates: MAX20335

General Description

The MAX20335 evaluation kit (EV kit) is a fully assembled and tested circuit for evaluating the MAX20335 wearable charge-management solution with I²C capability for low-power wearable application. The device includes a linear battery charger, smart power selector, two ultra-low quiescent current buck regulators, and three low-dropout (LDO) linear regulators.

Refer to the MAX20335 IC data sheet for detailed information regarding the operation and features of the devices.

Features

- RoHS Compliant
- Proven PCB Layout
- Full Assembled and Tested
- I²C Serial Interface

Detailed Description of Hardware

The MAX20335 evaluation kit (EV Kit) evaluates the MAX20335 wearable charge-management solution.

See [Table 1](#) thru [Table 3](#) for pin descriptions of the three connectors (J1–J3).

[Ordering Information](#) appears at end of data sheet.

Table 1. Connector J1

PIN	MAX20335	DESCRIPTION
1	GND	Ground
2	MON	Voltage Monitor Output
3	N.C.	Not Connected
4	INT	Open-drain Active-low Interrupt Output
5	RST	Power-On Reset Output.
6	SDA	I ² C Serial Data Input / Output
7	SCL	I ² C Serial Clock Input
8	MPC1	Multipurpose Configuration Input 1
9	MPC0	Multipurpose Configuration Input 0
10	PFN2	Power Function Control Input / Output
11	PFN1	Power Function Control Input
12	GND	Ground

Table 2. Connector J2

PIN	SIGNAL	DESCRIPTION
1	L3IN	LDO3 Input
2	L3OUT	LDO3 Output
3	L2OUT	LDO2 Output
4	L1OUT	LDO1 Output
5	B2OUT	Buck Regulator 2 Output
6	B1OUT	Buck Regulator 1 Output
7	L2IN	LDO2 Input
8	L1IN	LDO1 Input

Table 3. Connector J3

PIN	SIGNAL	DESCRIPTION
1	GND	Ground
2	CHRGIN	Charger Input
3	SYS	System Load Connection
4	BAT	Battery
5	THM	Battery Temperature Thermistor Connection
6	CAP	Bypass for Internal LDO
7	SET	External Resistor Connection for Configuring Battery Charge Current
8	LED	LED Current Sink Input
9	N.C.	Not Connected
10	N.C.	Not Connected
11	N.C.	Not Connected
12	GND	Ground

Component Suppliers


SUPPLIER	WEBSITE
Murata Americas	www.murata.com
TDK Corp	www.component.tdk.com

Note: Indicate that you are using the MAX20335 when contacting these component suppliers.


MAX20335 EV System Bill of Materials

ITEM	REF_DES	DNI/DNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION
1	C1-C9	-	9	C1005X5R1V225M050BC	TDK	2.2UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 2.2UF; 35V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R
2	C10-C12	-	3	C1608X5R0J226M080AC	TDK	22UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 22UF; 6.3V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R
3	J1, J3	-	2	PBC12SAAN	SULLINS ELECTRONICS CORP.	PBC12SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 12PINS; -65 DEGC TO +125 DEGC
4	J2	-	1	PBC08SAAN	SULLINS ELECTRONICS CORP.	PBC08SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 8PINS; -65 DEGC TO +125 DEGC
5	L1, L2	-	2	DFE201610E-2R2M	TOKO	2.2UH	INDUCTOR; SMT (2016); METAL ALLOY CHIP; 2.2UH; TOL=+/-20%; 2.6A
6	R3	-	1	ERA-2AED221	PANASONIC	220	RESISTOR; 0402; 220 OHM; 0.5%; 25PPM; 0.063W; THIN FILM
7	U1	-	1	MAX20335	MAXIM	MAX20335	EVKIT PART - IC; PWRM; WEARABLE CHARGE MANAGEMENT SOLUTION; WLP36;
8	PCB	-	1	MAX	MAXIM	PCB	PCB:MAX
9	Q1	DNP	0	SI8439DB-T1-E1	VISHAY SILICONIX	SI8439DB-T1-E1	TRAN; P-CHANNEL 8V (D-S) MOSFET; PCH; SMT; PD-(2.7W); I-(-9.2A); V-(-8V)
10	R1, R2	DNP	0	RG1005P-102-D	SUSUMU CO LTD.	1K	RESISTOR; 0402; 1K OHM; 0.5%; 25PPM; 0.0625W; THIN FILM
TOTAL			20				


MAX20335 EV System Schematic

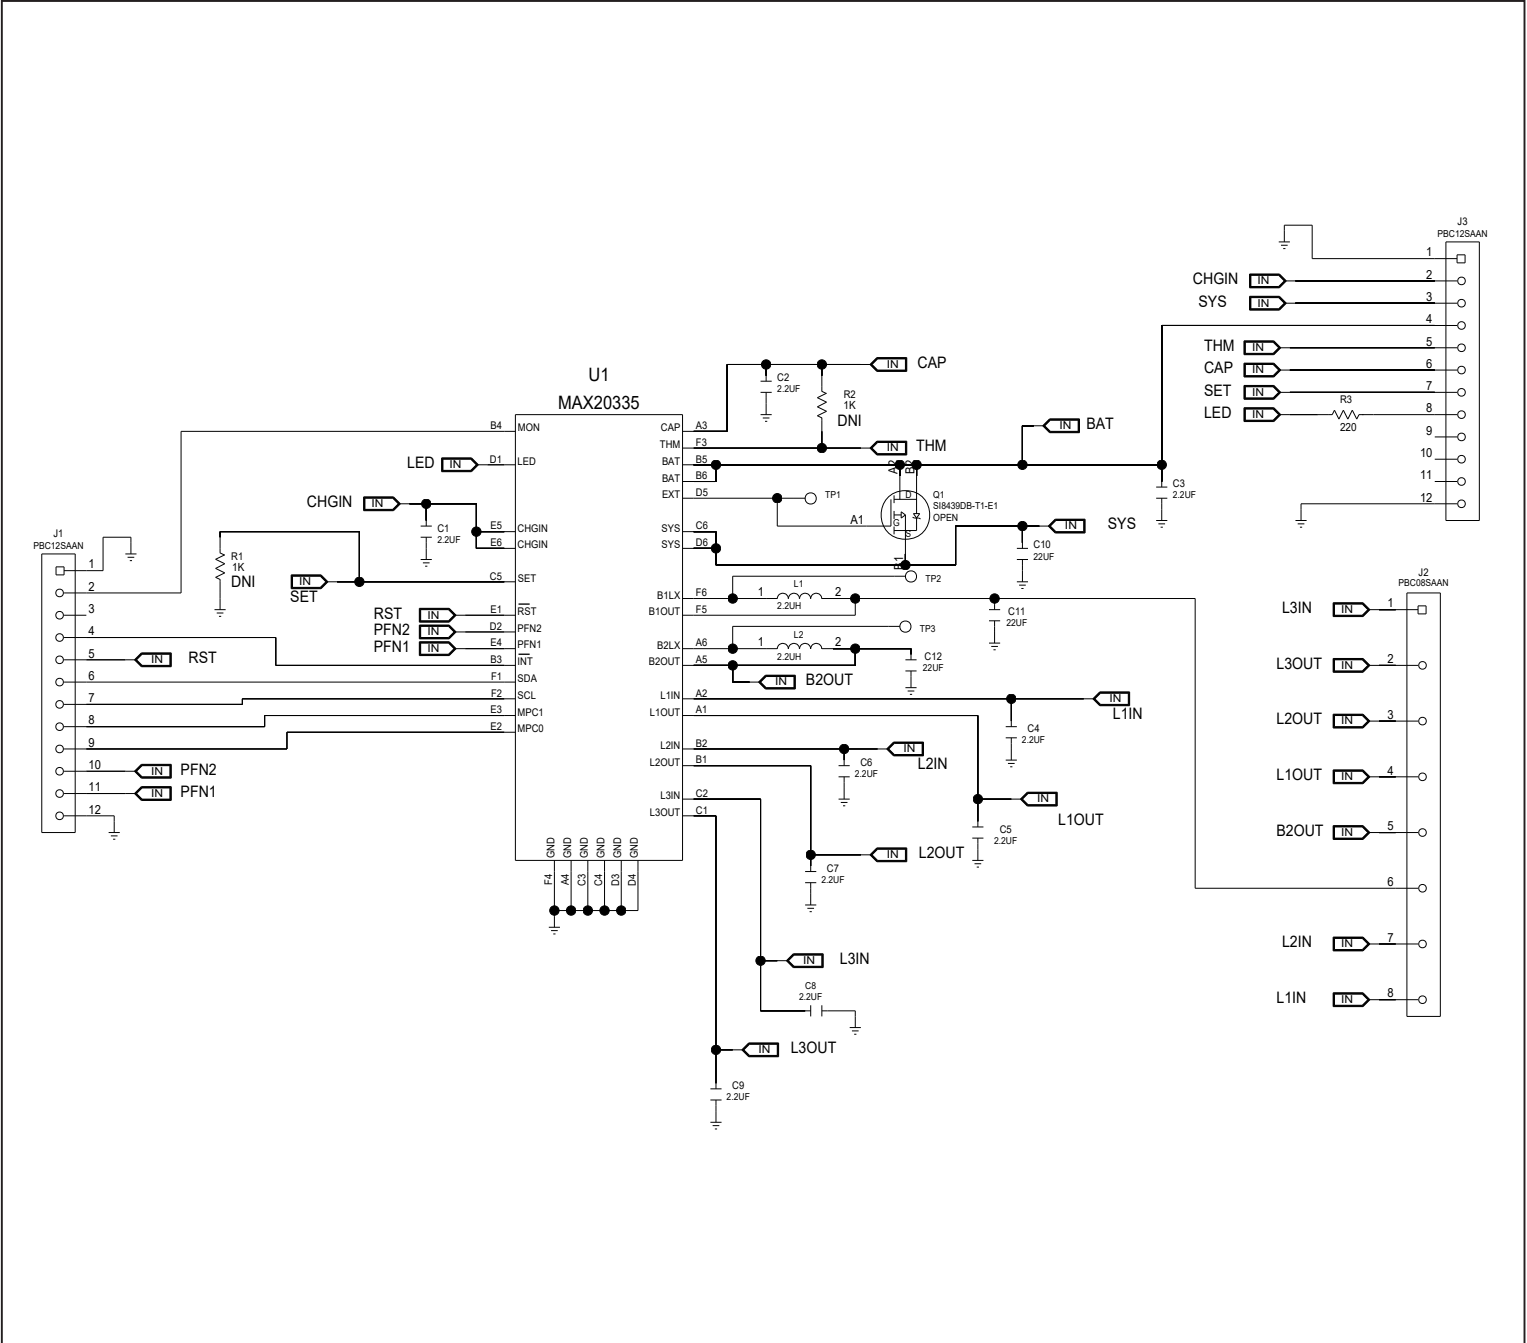


MAX20335 EV System PCB Layout

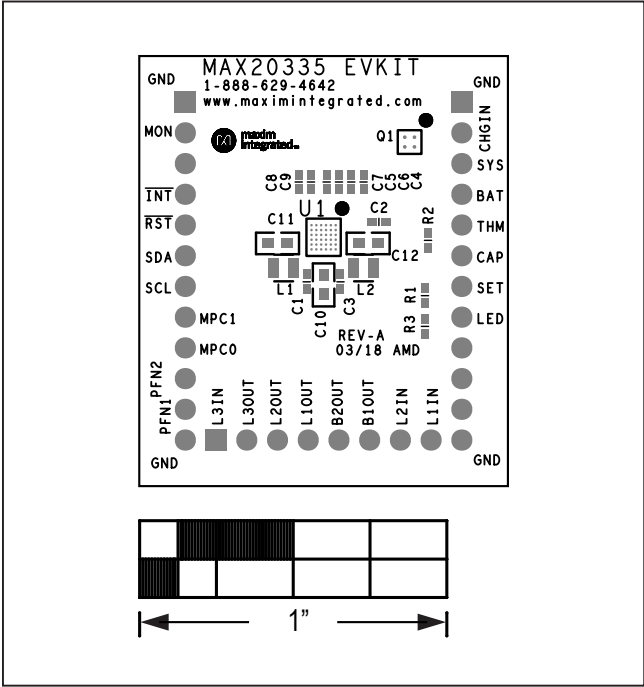

MAX20335 EV Kit—Top Silkscreen

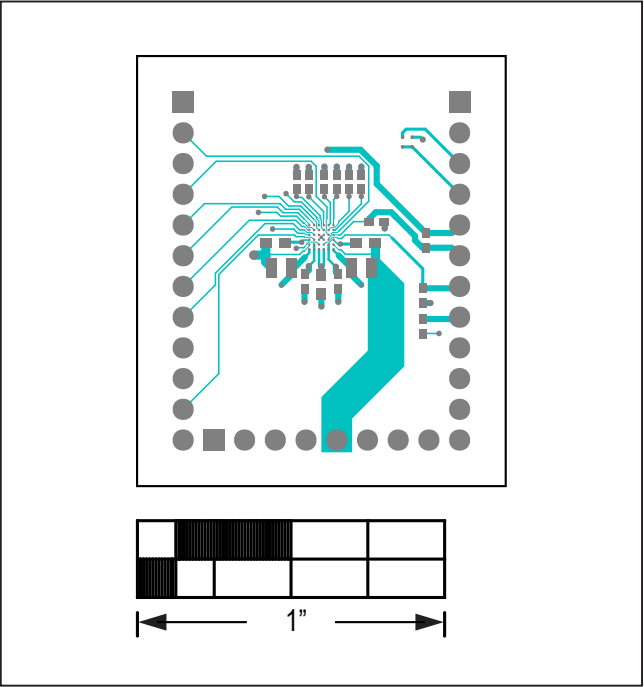


MAX20335 EV Kit—Top

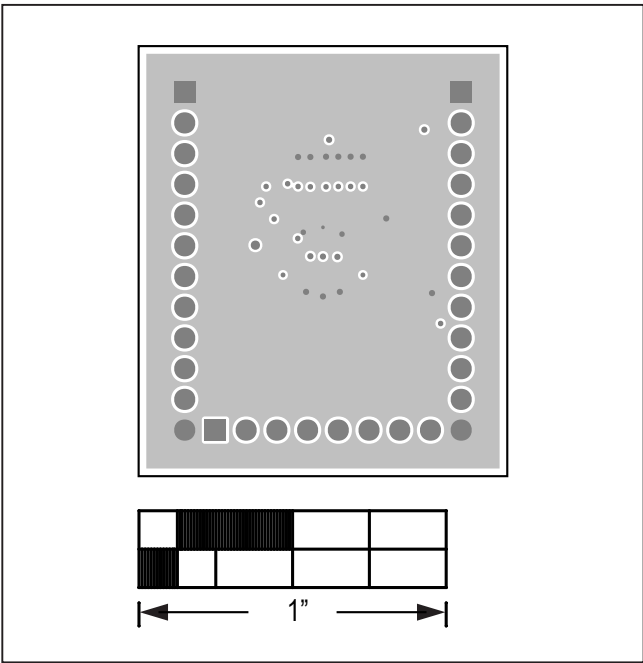


MAX20335 EV Kit—Layer 2


MAX20335 EV System PCB Layout (continued)

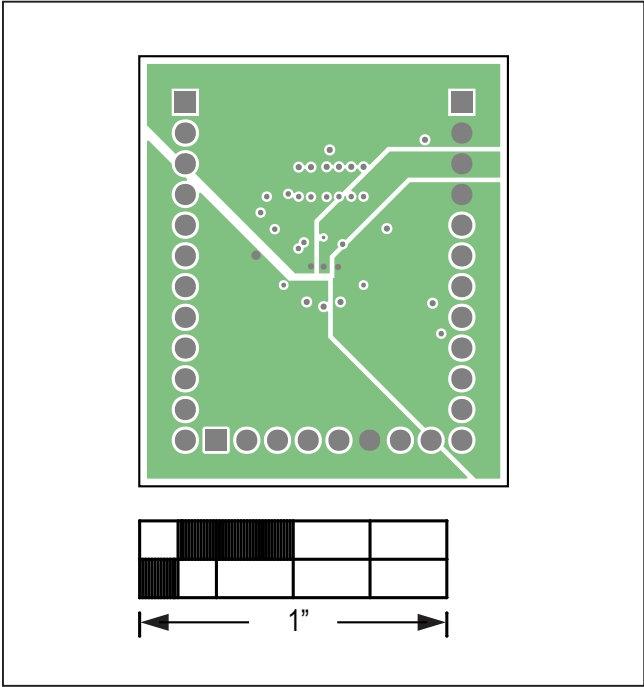

MAX20335 EV Kit—Layer 3

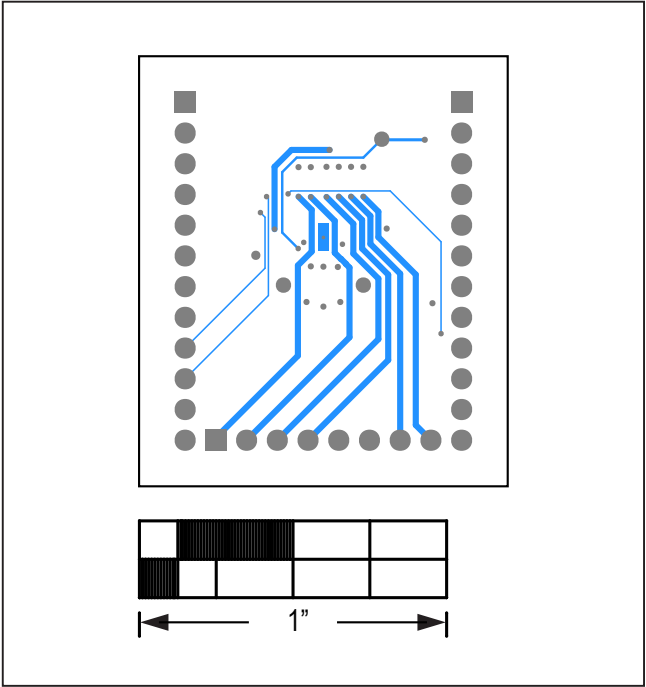

MAX20335 EV Kit—Bottom

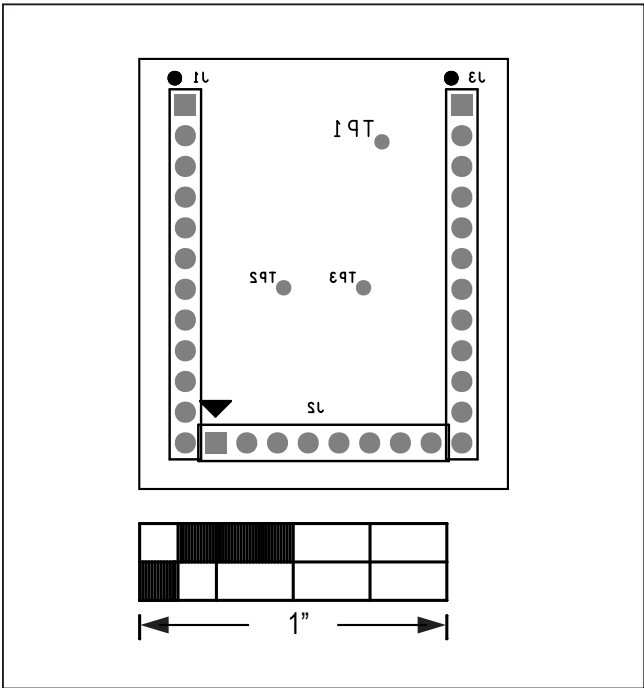

MAX20335 EV Kit—Bottom Silkscreen

Ordering Information

PART	TYPE
MAX20335EVKIT#	EV Kit

#Denotes RoHS compliant.

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	4/18	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.