


PRODUCT NUMBER	CABLE LENGTH "L"
10133305-1000LF	1000±40mm
10133305-5000LF	5000±80mm

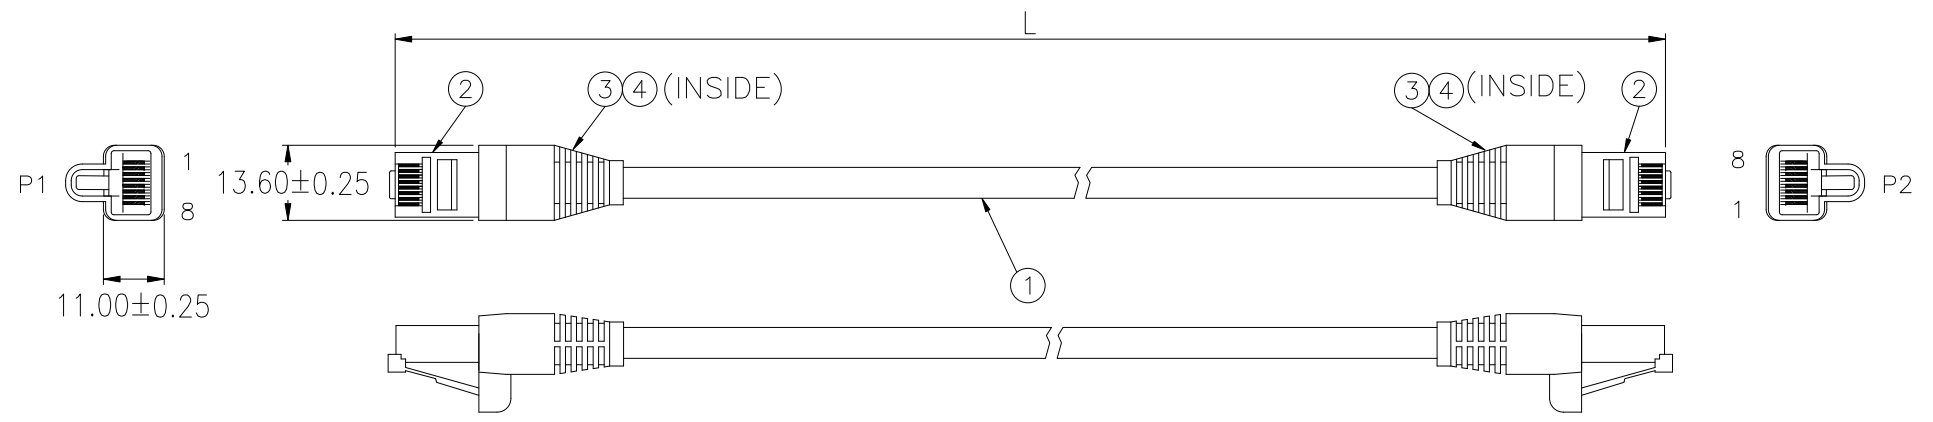

WIRING DIAGRAM

	P1	WIRE COLOR	P2
PAIR 1	1	WHITE	1
	2	ORANGE	2
PAIR 2	3	WHITE	3
	6	GREEN	6
PAIR 3	4	BLUE	4
	5	WHITE	5
PAIR 4	7	WHITE	7
	8	BROWN	8
	SHELL	SHIELD + BRAID	SHELL

- NOTE:
1. THE CABLE MEETS THE REQUIREMENTS OF TIA/EIA568 CAT 6A, AT FREQUENCY 500 MHZ.
 2. CONTACT PLATING: Au
 3. PRODUCT SPECIFICATION: GS-12-1295.
 4. PACKAGE SPECIFICATION: GS-14-2412.
 5. THE CABLE MEETS RoHS REQUIREMENTS.

4	COPPER FOIL	ADHESIVE COPPER FOIL, BOTH ELECTRIC	
3	BOOT	PVC, 94V-0	2
2	PLUG CONNECTOR	8P8C, CAT 6A, SHIELDED	2
1	SFTP CABLE	SFTP, CAT 6A CABLE, 26AWG, 4 PAIRS, GRAY INSULATION OUTER DIAMETER: 6±0.2mm	
ITEM	PART	DESCRIPTION	QTY.
mat'l. code		surface <input checked="" type="checkbox"/> tolerance	projection
ltr		product family	
ecn no	dr	date	tolerances unless otherwise specified
A	TAI	2015-04-07	angles
		linear	MM
		scale	
		dr	KENNY TAI 2015-04-07
		enr	KENNY TAI 2015-04-07
		chr	KENNY TAI 2015-04-07
		appd	PM ZHENG 2015-04-07
sheet index		revision	A
		sheet	1
		dwg no	10133305
		sheet	1 of 1
		size	A4
		type	CUSTOMER Drawing