

Description:

The premium choice for ESD bench dissipative worksurfaces. Provides a durable and attractive ESD controlled dissipative worksurface. Resists hot solder and most solvents; exceeds NEMA standards for wear resistance. Patented conductive layer provides superior charge dissipation and zero voltage suppression.



Electrical Properties:

Because the electrical properties of many high pressure laminates have some degree of humidity dependence, all high pressure laminate materials should be carefully tested for adequate performance at low humidity prior to selection and installation.

Property	Value	Test Method
Rtt:	10E6 - 10E9 ohms	ANSI/ESD S4.1, DIN 53 276
Rtg:	10E6 - 10E9 ohms	ANSI/ESD S4.1, ASTM, F-150-72 NFPA-99, DIN 53 276
RVOL:	Less than 10E8 ohms	ASTM-D257
Charge Decay:	<0.009 seconds	FTMS-101C, Method 4046

Measured at 50% and 12% relative humidity. Test reports available upon request. Color and texture may vary between lots and mills.


Specifications:

- Construction:** High pressure thermoset amino resin laminate
- Thickness:** Nominal 0.038" (0.96mm)
- Radius:** 1.5" radius corner
- Surface:** Top - non-glare matte finish
- Post Forming:** 5/8" radius, NEMA LD 3.14
- Weight:** 0.31 lbs/sq ft (0.151 grams/cm²)
- Abrasion Resistance:** Exceeds NEMA LD 3-3.01 Standards
- Chemical Resistance:** Unaffected by most solvents
- Heat Resistance:** NEMA LD 3-3.06, 160°F (71°C) continuous


Look for the Micastat® brand on Desco laminate sheets - for your protection and auditing purposes.

Cleaning: For optimum electrical performance of your ESD mat surface, clean regularly with an ESD mat cleaner. We suggest using Reztore™ Surface & Mat Cleaner, Item #10435 or Static-Wipes Item #10600. Do not use cleaners with silicone. Silicone buildup will create an insulative film on the surface.

Grounding: This material must be properly grounded for optimal electrical performance. Ask for Technical Bulletin [TB-2000](#) for grounding instructions.



Bench Pad



Micastat® Sheet

Micastat® Kits - Item Numbers

Color	24" x 48"	24" x 36"
Beige	10350	10310
Blue	10384	10344
Grey	10382	10342

Hardware Included

Special sizes available upon request.
Top -- non-glare matte finish.
Bottom -- Double sided tape to attach.

Tolerances:
Width ±.250"
Length ± .250" every 1 linear foot of running material.

Specifications and procedures subject to change without notice.

Micastat® Sheets - Item Numbers


Size	Beige	Blue	White	Grey
30" x 10'	10200	10180	10240	10290
30" x 12'	10202	10181	10242	10291
36" x 8'	10203	10182	10243	10292
36" x 10'	10204	10183	10244	10293
36" x 12'	10206	10184	10246	10294
48" x 8'	10208	10185	10248	10295
48" x 12'	10212	10187	10252	10297
60" x 12'	10215	10190	10255	10300

Special sizes available upon request.

Top -- non-glare matte finish.

Grounding hardware not included. Micastat® Ground Kits [14246](#) & [14244](#) are recommended.

Ask for Technical Bulletin [TB-2091](#) for further information.

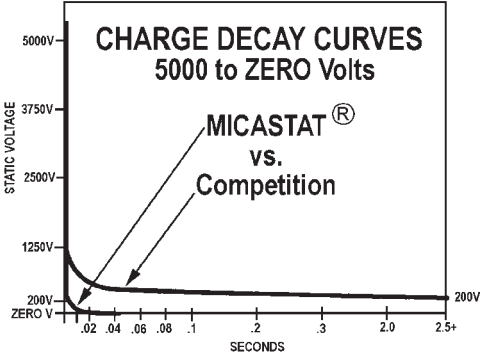

Disclaimer:

All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized officers of Desco Industries, Inc.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at [Desco.com](#).

Limited Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/ conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by Desco Limited Warranty.

Micastat® Dissipative Laminate



DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](#)
PHONE (909) 627-8178
DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370

MATERIAL TYPE
MICASTAT
DRAWING 10200

DATE:
January
2012