



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input

1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS

xRAH-01H1A0

RoHS Compliant

Rev.A

- Non-Isolated
- Trim Function
- Low Profile Package (7.82 mm)
- UL60950-1 Recognized (UL/cUL)
- Remote On/Off
- OCP/SCP
- Under-Voltage Lockout (UVLO)



Description

The Bel xRAH-01H1A0 is part of the low cost non-isolated dc/dc converter series. The modules use a SMD or vertical mount package for ease of layout and space savings. The output is widely trimmed from 1.2 Vdc to 3.3 Vdc. Typical features include remote on/off, input under voltage lockout, over current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
1.2 V - 3.3 V	4.5 V - 32 V	1 A	3.3 W	86%	SRAH-01H1A0	VRAH-01H1A0

- Notes:** 1. Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	34 V	
Output Enable Terminal Voltage	-0.3 V	-	12 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	4.5 V	20 V	32 V	
Input Current (no load)	-	5 mA	8 mA	
Input Current (full load)				
Vo=3.3 V	-	-	0.20 A	
Vo=2.5 V	-	-	0.16 A	
Vo=1.8 V	-	-	0.12 A	
Vo=1.5 V	-	-	0.11 A	
Vo=1.2 V	-	-	0.09 A	
Remote Off Input Current	-	2 mA	5 mA	
Input Reflected Ripple Current (pk-pk)	-	300 mA	420 mA	Tested with simulated source impedance of 500 nH, 5 Hz to 20 MHz and one 100 F/50 V electrolytic capacitor and a 3.3 uF/50 V ceramic capacitor at the input
Input Reflected Ripple Current (RMS)	-	100 mA	160 mA	
I ² t Inrush Current Transient	-	0.02 A ² s	0.1 A ² s	
Turn on Voltage Threshold	-	4.1 V	4.5 V	
Turn off Voltage Threshold	-	3.3 V	4.0 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input

1.2 Vdc - 3.3 Vdc/1 A Output



Output Specifications

Parameter		Min	Typ	Max	Notes	
Output Voltage Set Point					Test conditions: Vin=20 V, Io=50% full load	
	Vo=3.3 V	3.234 V	3.3 V	3.366 V		
	Vo=2.5 V	2.450 V	2.5 V	2.550 V		
	Vo=1.8 V	1.764 V	1.8 V	1.836 V		
	Vo=1.5 V	1.470 V	1.5 V	1.530 V		
	Vo=1.2 V	1.176 V	1.2 V	1.224 V		
Line Regulation						
	Vo=3.3 V	-	±3 mV	±6 mV		
	Vo=2.5 V	-	±2 mV	±5 mV		
	Vo=1.8 V	-	±2 mV	±4 mV		
	Vo=1.5 V	-	±1 mV	±3 mV		
	Vo=1.2 V	-	±1 mV	±2 mV		
Load Regulation						
	Vo=3.3 V	-	±3 mV	±6 mV		
	Vo=2.5 V	-	±2 mV	±5 mV		
	Vo=1.8 V	-	±2 mV	±4 mV		
	Vo=1.5 V	-	±1 mV	±3 mV		
	Vo=1.2 V	-	±1 mV	±2 mV		
Regulation Over Temperature (-40 °C to +85 °C)		-	±10 mV	±20 mV		
Output Current		0 A	-	1 A		
Current Limit Threshold		2 A	-	3 A		
Short Circuit Surge Transient		-	0.02 A ² s	0.1 A ² s		
Ripple and Noise (rms)		-	6 mV	10 mV	Test condition: 0-20 MHz BW	
Ripple and Noise (pk-pk)		-	60 mV	100 mV		
Turn on Time		-	6 mS	30 mS		
Overshoot at Turn on		-	2%	5%		
Output Capacitance		0 uF	-	400uF		
Transient Response						
50% ~ 100% Max Load	Overshoot	Vo=3.3 V	-	80 mV	120 mV	Test conditions: di/dt = 0.5 A/uS; Vin = 20 V
	Settling Time		-	150 uS	200 uS	
100% ~ 50% Max Load	Overshoot		-	80 mV	120 mV	
	Settling Time		-	150 uS	200 uS	
50% ~ 100% Max Load	Overshoot	Vo=2.5 V	-	70 mV	110 mV	
	Settling Time		-	120 uS	160 uS	
100% ~ 50% Max Load	Overshoot		-	70 mV	110 mV	
	Settling Time		-	120 uS	160 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.8 V	-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	
100% ~ 50% Max Load	Overshoot		-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.5 V	-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	
100% ~ 50% Max Load	Overshoot		-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	
50% ~ 100% Max Load	Overshoot	Vo=1.2 V	-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	
100% ~ 50% Max Load	Overshoot		-	60 mV	100 mV	
	Settling Time		-	100 uS	130 uS	

Note: All specifications are typical at 20 V input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input

1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=20 V, full load.
Vo=3.3 V	83%	86%	-	
Vo=2.5 V	80%	83%	-	
Vo=1.8 V	76%	79%	-	
Vo=1.5 V	73%	76%	-	
Vo=1.2 V	70%	73%	-	
Switching Frequency				
Vo=3.3 V	270 kHz	290 kHz	310 kHz	
Vo=2.5 V	190 kHz	220 kHz	250 kHz	
Vo=1.8 V	150 kHz	170 kHz	190 kHz	
Vo=1.5 V	130 kHz	150 kHz	170 kHz	
Vo=1.2 V	100 kHz	120 kHz	140 kHz	
Output Trim Range	1.2 V	-	3.3 V	Vo=1.2 V when trim pin open.
MTBF	8,040,762 hours			Calculated Per Bell Core SR-332 (Io =0.8 A, Vin=20 V; Ta = 25 °C)
Dimensions (surface mount)				
Inches (L x W x H)	0.78 x 0.70 x 0.32			
Millimeters (L x W x H)	19.81 x 17.78 x 8.13			
Dimensions (vertical)				
Inches (L x W x H)	0.70 x 0.308 x 0.65			
Millimeters (L x W x H)	17.78 x 7.82 x 16.51			
Weight	-	5.1 g	-	

Note: All specifications are typical at 20V input, full load at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit On)	-0.3 V	-	1 V	Remote on/off pin open, unit on.
Signal High (Unit Off)	2.8 V	-	12 V	



Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vo) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{TrimDown} = \frac{8.7}{V_o - V_{adj}} - 21.5$$

$$R_{TrimUp} = \frac{17.2}{V_{adj} - V_o}$$

Note: Output voltage Vo=1.205 V

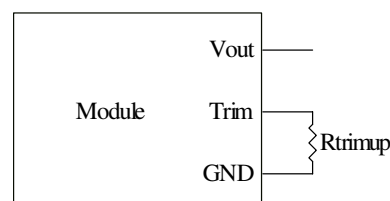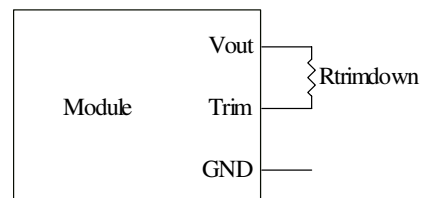


NON-ISOLATED DC/DC CONVERTER


4.5 Vdc - 32 Vdc Input 1.2 Vdc - 3.3 Vdc/1 A Output




Efficiency Data

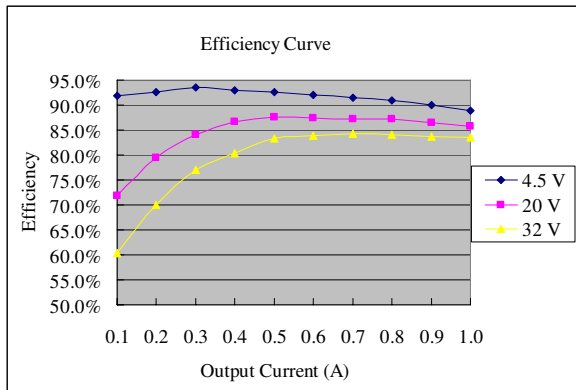


Vo = 3.3 V

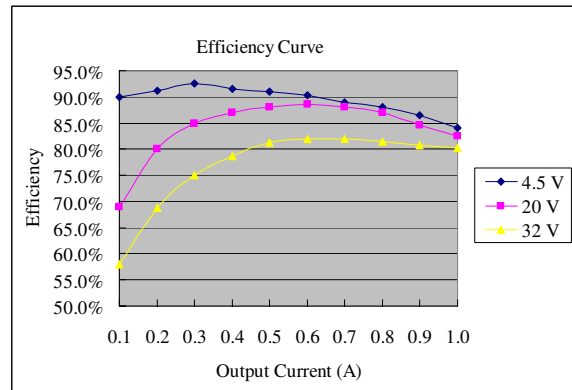


Vo = 2.5 V

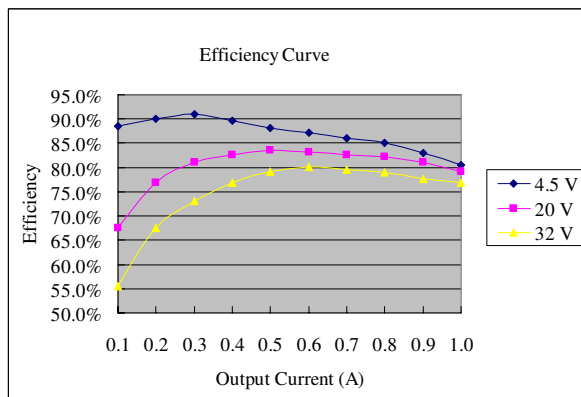

Vo = 1.8 V

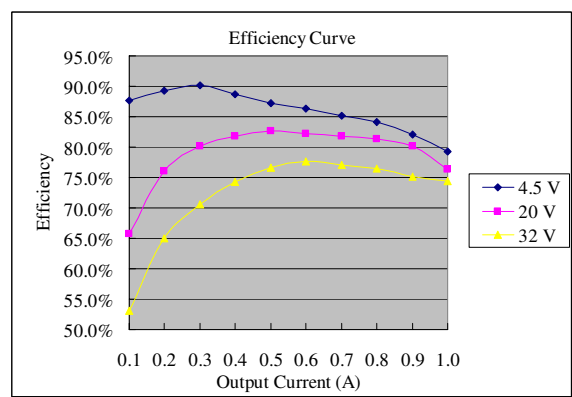

Vo = 1.5 V

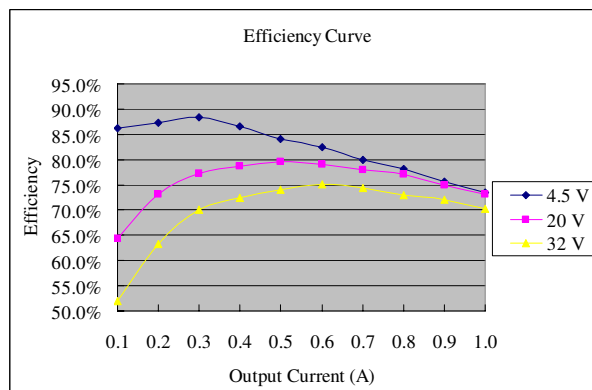

Vo = 1.2 V


NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input

1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS

Thermal Derating Curve

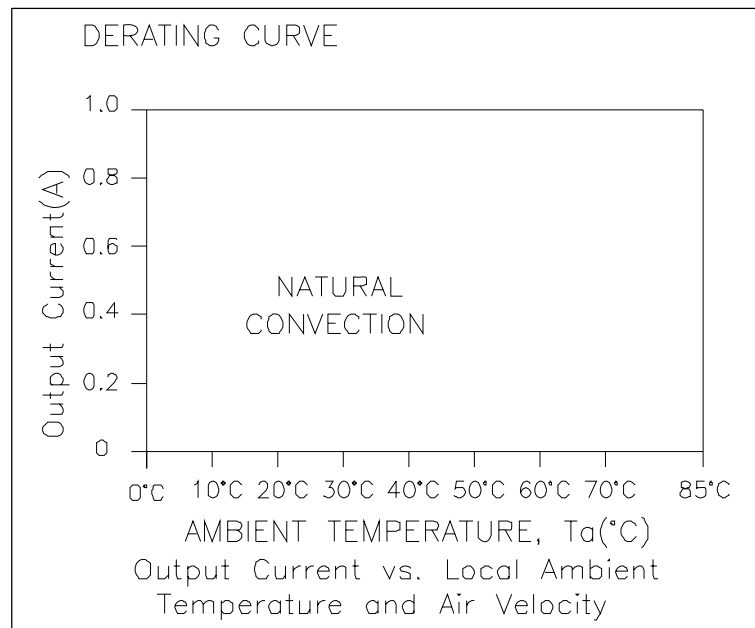

Test Condition: Derating curve is tested at nominal input voltage.


NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input


1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

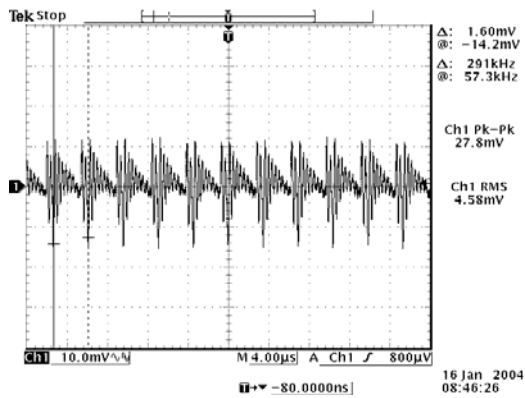


20 Vdc input, 3.3 Vdc output

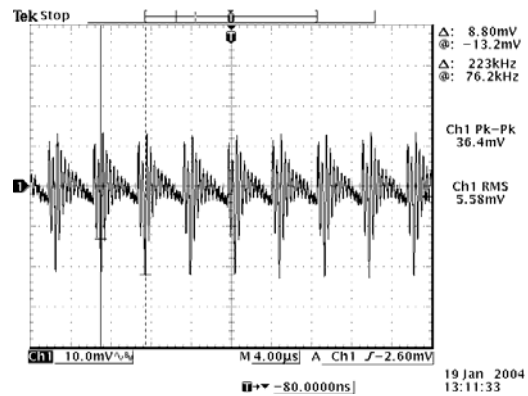


20 Vdc input, 2.5 Vdc output

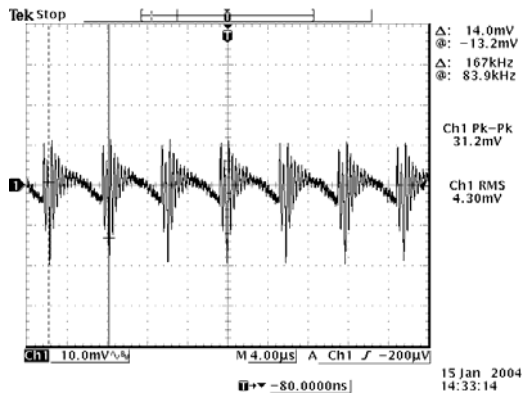

20 Vdc input, 1.8 Vdc output

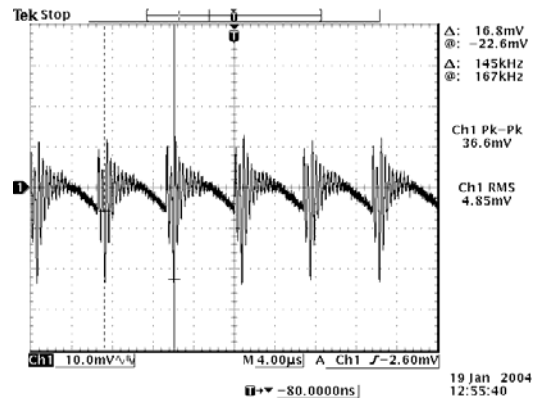

20 Vdc input, 1.5 Vdc output

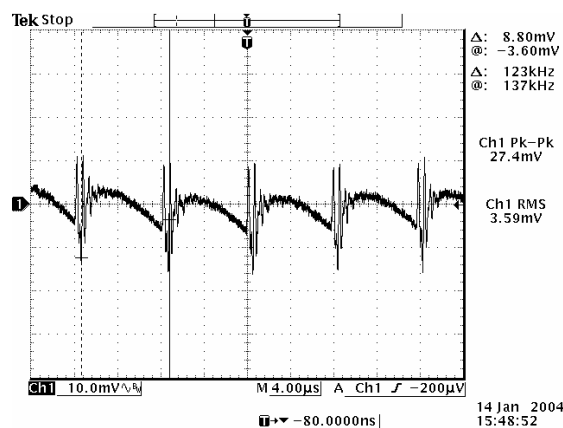

20 Vdc input, 1.2 Vdc output

Note: Ripple and noise at max load, 0-20MHz BW, $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input


1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS


Transient Response Waveforms

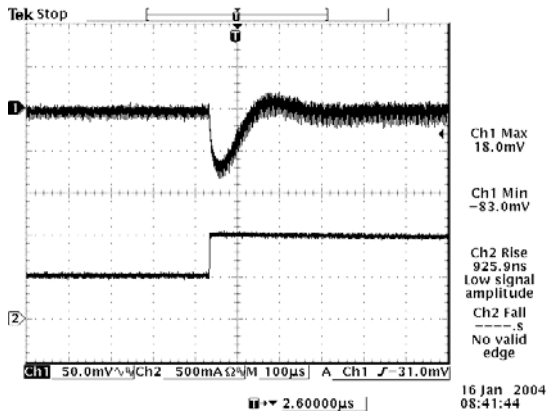


50% to 100% load, 3.3 Vdc output

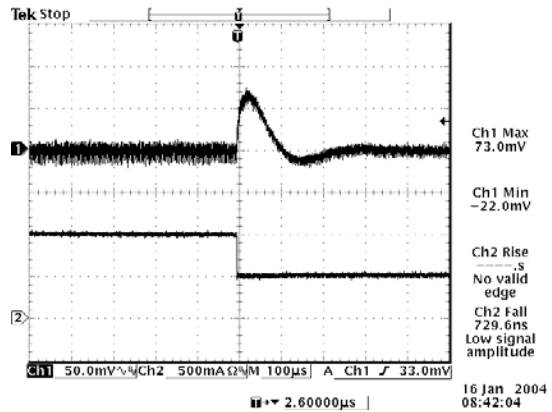


100% to 50% load, 3.3 Vdc output

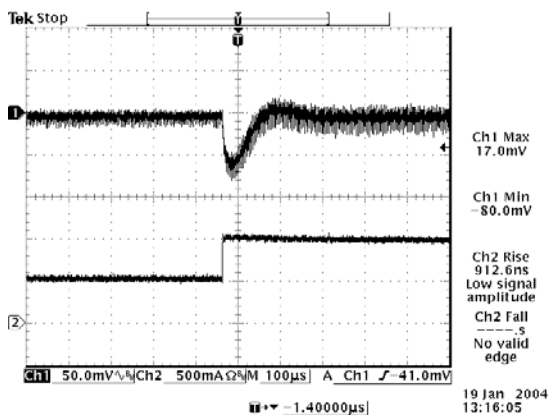


50% to 100% load, 2.5 Vdc output

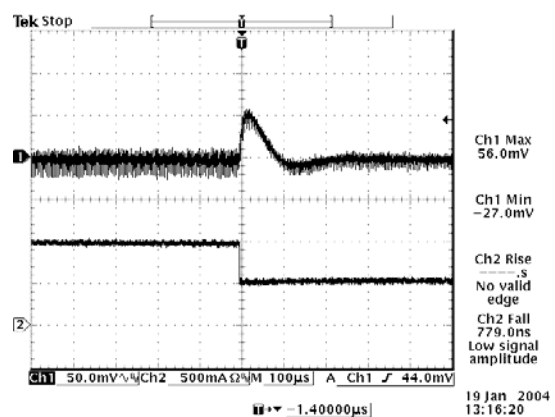

100% to 50% load, 2.5 Vdc output

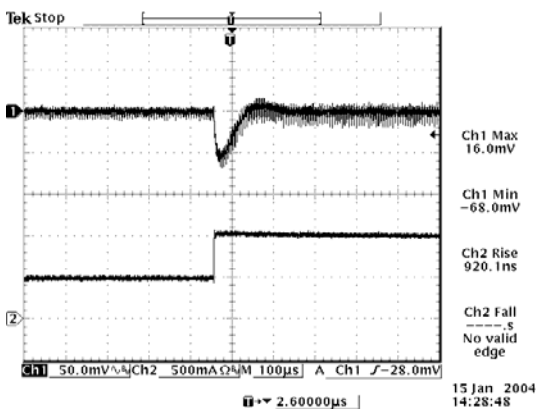

50% to 100% load, 1.8 Vdc output

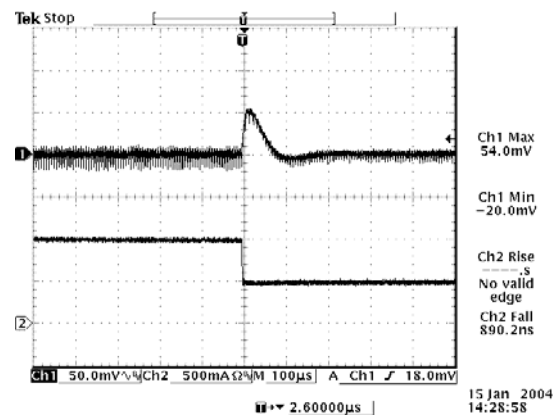

100% to 50% load, 1.8 Vdc output


NON-ISOLATED DC/DC CONVERTER

4.5 Vdc - 32 Vdc Input


1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS


Transient Response Waveforms (continued)

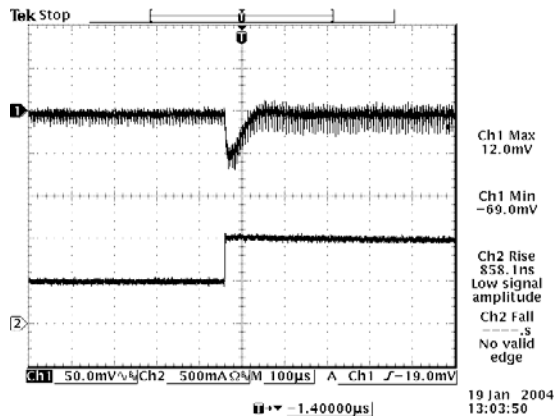


50% to 100% load, 1.5 Vdc output

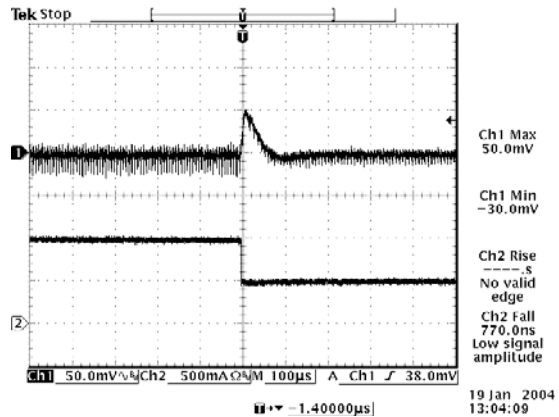

100% to 50% load, 1.5 Vdc output

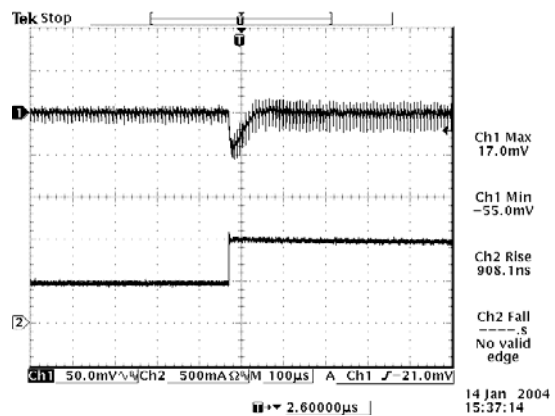

50% to 100% load, 1.2 Vdc output

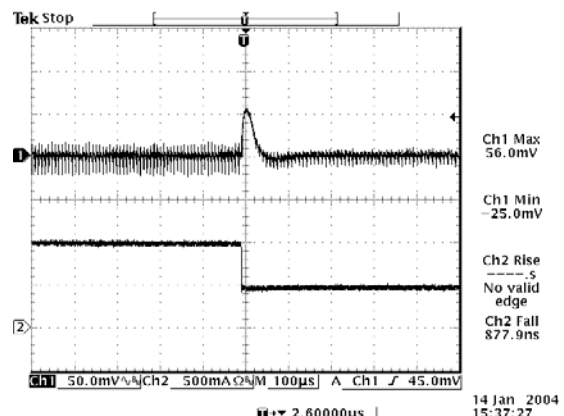

100% to 50% load, 1.2 Vdc output

Note: Transient Response at 20 Vdc input, $di/dt=0.5$ A/ μ S, $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTER


4.5 Vdc - 32 Vdc Input

1.2 Vdc - 3.3 Vdc/1 A Output

bel
POWER PRODUCTS

Mechanical Outline


SRAH-01H1A0

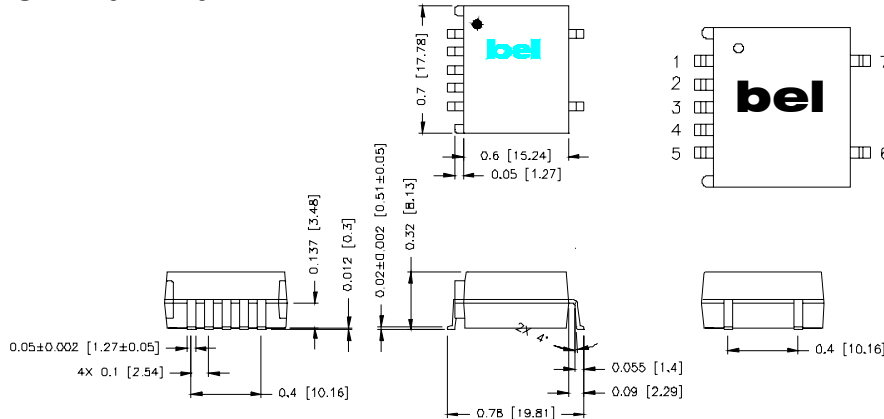

Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A

VRAH-01H1A0

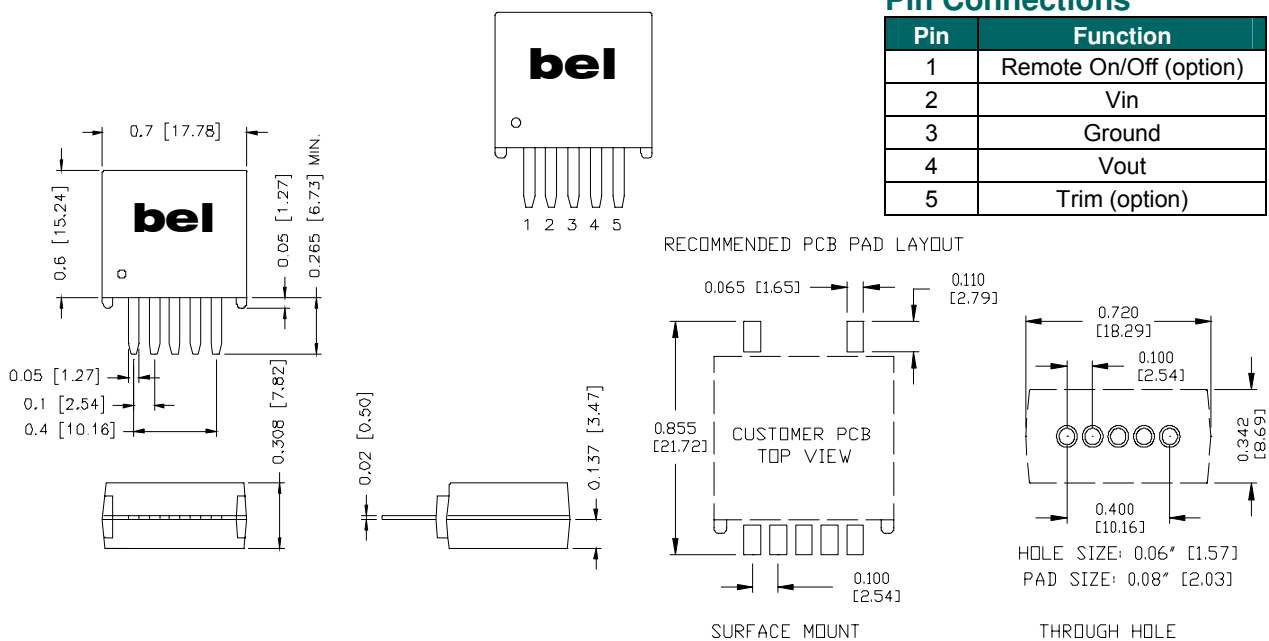

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 010907

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com