

TY - 402P

Description:

The TY series transformers are used for a variety of applications including impedance matching, isolation, repeat coil, line balancing, bridging and hybrid circuit.

Electrical Specifications at 25° C:

| Impedance (Ohms) | | Max. DC Current (mA) | Typ. Insertion Loss (dB) | Typ. Return Loss (dB) | Typ. Freq. Response (dB) |
|------------------|-----|----------------------|--------------------------|-----------------------|--------------------------|
| Pri | Sec | | | | |
| 600 | 600 | 90 | 1.75 | 13 | ±.5 |

Designed to meet FCC Part 68


Longitudinal Balance: (FCC 68.310) – 60 dB min. 200 – 1000 Hz
45 dB min. 1000 – 4000 Hz

Dielectric Strength: (FCC 68.304) – 1500VAC

Power Level: -45 dBm to +7 dBm

Frequency Range: 300 to 3500 Hz

Electrical Schematic:

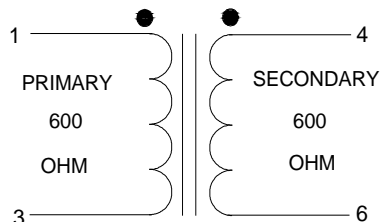

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>

