

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







rfmd.com

WIDE BANDWIDTH, HIGH LINEARITY LOW NOISE AMPLIFIER/LINEAR DRIVER

Package Style: QFN, 20-Pin, 5mmx5mm






Features

- Low Noise and High Intercept Point
- Adjustable Bias Current for enhanced IP3
- Single 2.5V to 6.0V Power Supply
- 400 MHz to 3800 MHz Operation
- QFN20, 5mmx5mm Package

Applications

- WiMAX LNA or Linear Driver
- GSM 900, CDMA, PCS, UMTS LNA
- WLAN LNA
- High Gain Linear Amplification



Functional Block Diagram

Product Description

The RF3865 is a low noise amplifier with a high output IP3. The amplifier is self-biased from a single voltage supply with 50Ω input and output ports. The useful frequency range is from 400MHz to 3800MHz. A 1dB noise figure and 36dBm OIP3 performance is achieved with a 5V V_{DD}, 180mA. Current can be increased to raise OIP3 while having minimal effect on noise figure. The IC is featured in a standard QFN, 20-pin, 5mmx5mm package.

Ordering Information

RF3865 Wide Bandwidth, High Linearity Low Noise Amplifier/Linear

Driver

RF3865PCK-410 Fully Assembled Evaluation Board with 5 Sample Parts

1.8 GHz to 3.8 GHz 700 MHz to 1100 MHz

Optimum Technology Matching® Applied

☐ GaAs HBT	☐ SiGe BiCMOS	▼ GaAs pHEMT	☐ GaN HEMT
☐ GaAs MESFET	☐ Si BiCMOS	☐ Si CMOS	☐ RF MEMS
☐ InGaP HBT	☐ SiGe HBT	☐ Si BJT	☐ LDMOS

RF MIGRO DEVICES®, RRFM®, Optimum Technology Matching®, Enabling Wireless Connectivity® PowerStar®, DAIS® "TOTAL RADIO" and UltimateBlue® are trademarks of RRFM. LLC. BLUETOOTH is a trade mark owned by Bulletooth SiG. Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and resist rademarks and resistant rademarks rademarks and resistant rademarks rade

RF3865



Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage	6	V
Input RF Level (See Note 1)	+10	dBm
Current Drain, I _{DD}	150 per stage	mA
Operating Ambient Temperature	-40 to +85	°C
Storage Temperature	-40 to +150	°C

Note 1. Max continuous RF IN is +10 dBm. The max transient RF IN is +20 dBm.



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Parameter		Specification		Unit	Condition	
	Min.	Тур.	Max.	Unit	Condition	
High Band						
Frequency	3300		3800	MHz		
Current		180	220	mA	V _{DD} =5V	
Gain		20		dB	+25°C, V _{DD} =5V, I _{DD} =180mA, 3500MHz unless specified	
Noise Figure		1.1		dB		
Output IP3		37		dBm	f ₁ =3500MHz, f ₂ =3501MHz	
Output P1dB		22		dBm		
S11		-17		dB		
S22		-17		dB		
S12		-33		dB		
Mid Band						
Frequency	1800		2700	MHz		
Current		180	220	mA	V _{DD} =5V	
Gain	27.5	28.5	31.0	dB	+25°C, V _{DD} =5V, I _{DD} =180mA, 2000MHz unless specified	
Noise Figure	1.0	1.2		dB		
Output IP3	34	36		dBm	f ₁ =2000MHz, f ₂ =2001MHz	
Output P1dB	21.0	22.5	25.0	dBm		
S11		-10		dB		
S22		-20		dB		
S12		-40		dB		
Low Band						
Frequency	700		1100	MHz		
Current		180	220	mA	V _{DD} =5V	
Gain		33		dB	+25°C, V _{DD} =5V, I _{DD} =180mA, 850MHz unless specified	
Noise Figure		1.2		dB		
OIP3		36		dBm	f ₁ =851MHz, f ₂ =851MHz	
OP1dB		22		dBm		
S11		-15		dB		
S22		-18		dB		
S12		-40		dB		






Parameter	Specification			Unit	Condition	
	Min.	Тур.	Max.	Offic	Condition	
Thermal						
Theta _{JC}		30		°C/W	Dissipated power= $V_{DD}*(I_{DD1}+I_{DD2})$	
Power Supply						
Device Operating Voltage	2.5	5.0	6.0	V		
Operating Current	130	180	220	mA	V _{DD} =5V, R3=open	




Pin	Function	Description				
1	NC	Not connected.				
2	NC	Not connected.				
3	RF IN	RF input pin. 50 Ω matched. This pin is DC-blocked.				
4	NC	Not connected.				
5	AC GND1	AC ground. Shunt cap may be added for tuning.				
6	NC	Not connected.				
7	INTERSTAGE	Interstage RF output.				
	OUT					
8	NC	Not connected.				
9	INTERSTAGE	Interstage RF input.				
	IN					
10	NC	Not connected.				
11	AC GND2	AC ground. Shunt resistor may be added to increase I _{DD} and OIP3.				
12	NC	Not connected.				
13	RF OUT	RF output pin. 50Ω matched. This pin is DC-blocked				
14	NC	Not connected.				
15	NC	Not connected.				
16	NC	Not connected.				
17	VD2	Bias voltage. 2.5V to 6.0V applied through bias inductor.				
18	NC	Not connected.				
19	VD1	Bias voltage. 2.5V to 6.0V applied through bias inductor.				
20	NC	Not connected.				
Pkg Base	GND	Ground connection and heat sink.				

Package Drawing






Evaluation Board Schematic

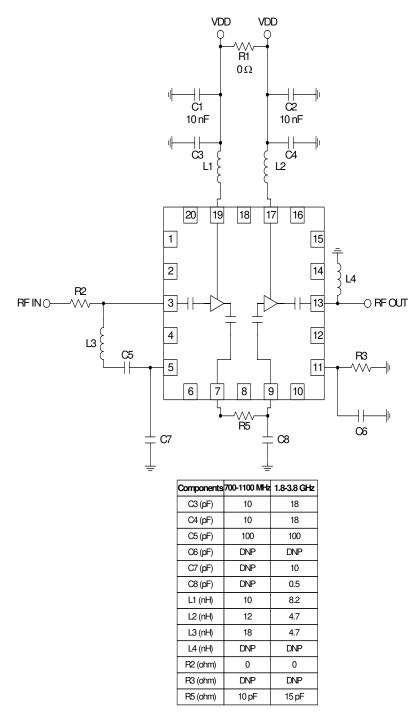

R3 is DNP for standard 180 mA current draw. If R3 is added, the I_{DD} will increase. A 20 Ω R3 will raise the current to achieve higher linearity.




Application Schematic

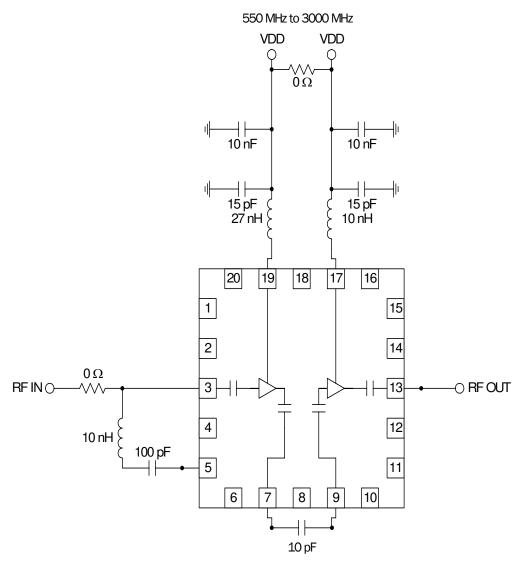



Frequency	VCC	ICC	Gain	OIP3	OP1dB	NF
MHz	(V)	(V)	dB	dBm	dBm	dB
550	5	170	31.1	36.4	22	1.85
1000	5	170	31.3	37	22	1.2
1500	5	170	32	36.1	22	1.2
1800	5	170	32	36	22	1.2
2000	5	170	30.5	36.5	22.5	1.2
2500	5	170	26.6	36.8	22.8	1.2
3000	5	170	22.6	37.2	22.6	1.4



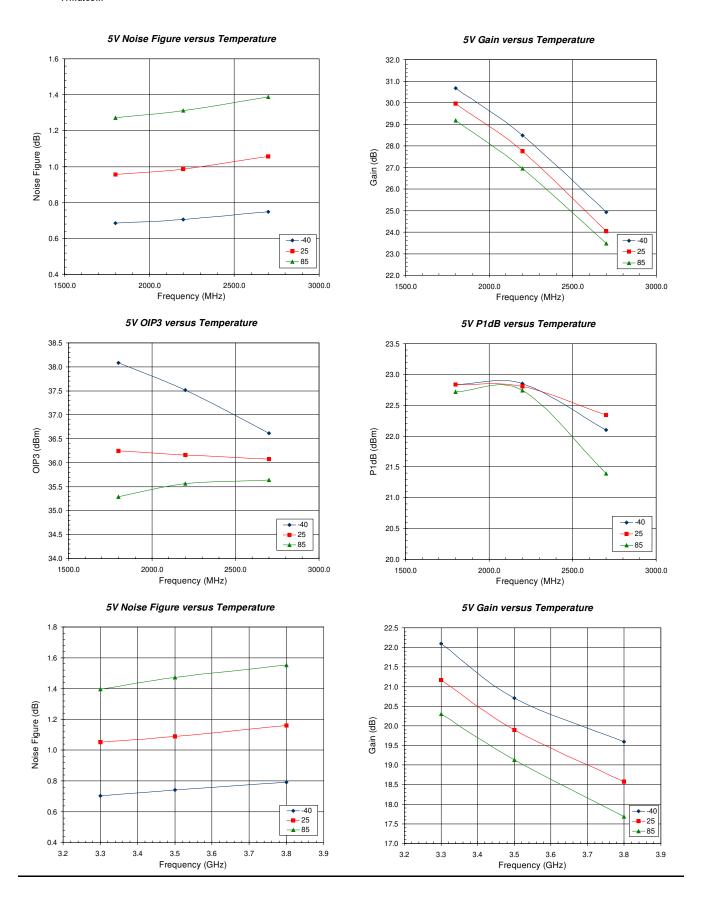









RF3865 matched from 550 - 3000 MHz (Refer to Application Schematic) Vcc = 5 V, lcc = 170 mA



S-parameter response for 550 to 3000 MHz **Application Schematic**





Theory of Operation

Low noise figure and high gain/IP3 make the RF3865 ideal for use as both receive LNA and transmit driver for cellular/DCS/PCS/UMTS and WiMax platforms, in addition to many other general purpose applications. Standard evaluation boards cover 700MHz to 1100MHz and 800MHz to 3800MHz. Viewing the data sheet evaluation board schematic, refer below for the purpose/function of external components.

- R2/L4/C6 (0Ω/unpopulated/unpopulated on standard evaluation boards); These unused components were placed for convenience and flexibility when needed to optimize matching for an out of band application.
- L3/C5/C7: Placed to optimize input match and enhance out of band low frequency stability.
- R3: Optionally placed to increase bias current and IP3. 20Ω value is found to be the best case. Refer to RF3861, RF3863, and RF3866 data sheets for graphical demonstration of 20Ω optimal value. RF3865 has been confirmed to follow the same trend.
- L1/C3/R5/C8: Interstage tuning.
- L2/C4: Influence output return loss.

RF3865 has internal DC-blocking capacitors at RFin and RFout. In addition, it has been shown impedance seen looking out at pins 7/9/17/19 influence response. As a result, two port s-parameters become non-applicable. If matching is desired for frequency bands outside of those provided with standard evaluation boards, an application schematic within this data sheet for 550 MHz to 3000 MHz serves as an example. In the 550 MHz to 3000 MHz application, design goals were as follows:

- Input and output return loss equal to or better than 10dB over the entire 2450MHz bandwidth.
- IP3 and compression point in line with standard evaluation board performance.

These goals were attained, with additional specifications shown in the graph section of the data sheet:

- Noise figure <= 1.2 dB from 1000 MHz to 2500 MHz
- Gain > 30 dB from 550 MHz to 2000 MHz

The above matching discussion should be helpful when considering use in frequency bands outside of those covered by standard evaluation boards. It can be noted here that application schematics and standard boards collectively cover 87% of the usable bandwidth from 400MHz to 3800MHz. As such, choosing from these available schematics should accommodate the majority of applications that come about.

RF3865

