

Crimp contact - CK4,0-ED-10,00BU AG - 1586183

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Turned 4.0 crimp contact, single socket contact, 10 mm² conductor cross section, silver-plated

RoHS

Key Commercial Data

Packing unit	25 STK
GTIN	
GTIN	4046356359597

Technical data

Electrical characteristics

Note	for HC-M-02 modules
------	---------------------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	10 mm ² ... 10 mm ²
Connection cross section AWG	8
Stripping length of the individual wire	18 mm (For wire Ø ≥ 6.4 mm)
	15 mm (For wire Ø ≥ 4.3 mm)
Contact diameter	4 mm
Insertion/withdrawal cycles	≥ 500

General

Type	Individual female contact
Series	HC-M-03
Connection method	Crimp connection
Contact type	turned

Material data

Crimp contact - CK4,0-ED-10,00BU AG - 1586183

Technical data

Material data


Contact material	Copper alloy
Contact surface material	silver-plated

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

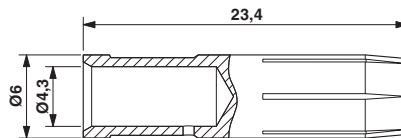

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>