



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Panel feed-through - Q 0,75/3FL/9-9KU-ESA BK - 1640595

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



QUICKON panel feed-through, for external wall mounting with manual solder/slip-on connection, 2.8 x 0.8 mm, 3-pos.

The illustration shows a green version



Key commercial data

Packing unit	1
Minimum order quantity	10
GTIN	 4 017918 173371
Custom tariff number	85369010
Country of origin	POLAND

Technical data

General characteristics

Connection	If the conductor is reconnected, it must be cut off above the last contact point. QUICKON components may only be operated when under no load.
Color	black
Connection method	Manual solder/slip-on connection; 2.8 x 0.8 mm
Number of positions	3
Wrench size, union nut	19 mm
Tightening torque, union nut	2.5 Nm
Wrench size, contact carrier	19 mm
Tightening torque contact carrier	3.75 Nm
Tightening torque, counter nut	3.75 Nm
Number of connections	3
Conductor cross section stranded min.	0.34 mm ²
Conductor cross section stranded max.	0.75 mm ²

Conductor data

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	Class 2-6 // 0.34 mm ² : 0.1 mm; 0.5 - 0.75 mm ² : 0.15 mm
---	--

Panel feed-through - Q 0,75/3FL/9-9KU-ESA BK - 1640595

Technical data

Conductor data

Wire insulation material	PVC/PE
Wire diameter including insulation	2.5 mm

Environmental conditions

Degree of protection	IP65/67
Ambient temperature (operation)	-25 °C ... 80 °C (Specifications of the cable manufacturer must be observed.)
Ambient temperature (operation)	-25 °C ... 50 °C (when the conductor is connected. Specifications of the cable manufacturer must also be observed.)

Electrical characteristics

Nominal current I_N	9 A
Rated voltage (III/3)	160 V
Note on the rated voltage (III/3)	with insulating sleeve

Mechanical characteristics

QUICKON connectability	10 (if the conductor is connected more than once, seal and cap may need to be replaced.)
PC QUICKON thread type	Pg9
Impact category	3

Material data

Contact material	Cu alloy
Contact surface material	Pre-nickel plated and tin-plated
Contact carrier material	PA
Inflammability class according to UL 94	V0

Classifications

ETIM

ETIM 2.0	EC001297
ETIM 3.0	EC000516
ETIM 4.0	EC000516

UNSPSC

UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522
UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423

Panel feed-through - Q 0,75/3FL/9-9KU-ESA BK - 1640595

Classifications

eCl@ss

eCl@ss 6.0	27143423
eCl@ss 7.0	27449001

Approvals

Approvals


Approvals


UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 	
Nominal current I _N	9 A
Nominal voltage U _N	250 V

cUL Recognized 	
Nominal current I _N	6 A
Nominal voltage U _N	250 V

cULus Recognized 	
--	--

Accessories

Accessories

Assembly

Panel feed-through - Q 0,75/3FL/9-9KU-ESA BK - 1640595

Accessories

Mounting material - Q-MU PG 9 - 1670882



Nut (plastic) to lock the contact carrier Pg9 / 30 WAF

Cable/conductor

Insulating sleeve - PT/FS 2,8 - 1406700



Insulating sleeve, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves

Protection and sealing elements

Cover caps - Q-PROT 9/11 - 1670235



Closing cap for PG9/PG11 to close unoccupied connections

Tools

Socket wrench - QSS 19 - 1670895



Socket wrench, for tightening and unscrewing the QUICKON union nut, wrench size 19 mm

Mounting material - Q SET- 9 DI/KR - 1640362




Seal/Collar replacement set Pg9

Drawings

Panel feed-through - Q 0,75/3FL/9-9KU-ESA BK - 1640595

Dimensioned drawing

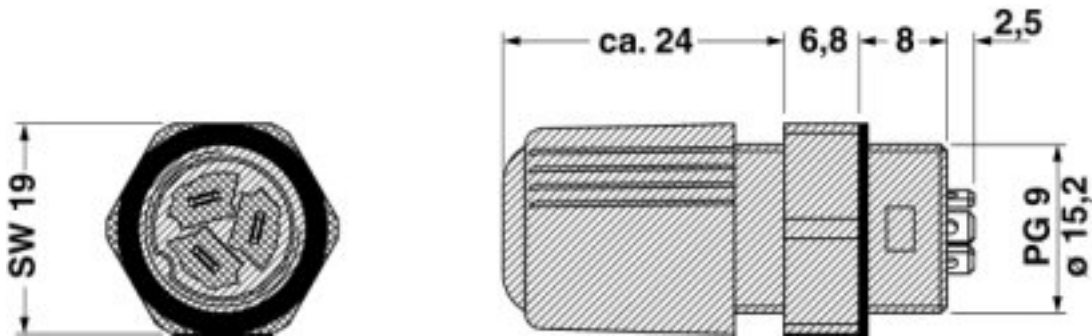

© Phoenix Contact 2012 - all rights reserved
<http://www.phoenixcontact.com>