

Micro-switch



With cable and connector



For "live insertion" applications. Installation in injector/extractor handles, types IV, IVs and VII.

Supply includes:

Micro-switch, connector type Molex 51021-0300, mounting clips, 3 cables, 25 mm x #32 AWG, fully assembled.

| Packs of | Order No. |
|----------|-----------------|
| 1 set | 3686.536 |

- 1 Lever not depressed
- 2 Lever hinge
- 3 Lever contact point

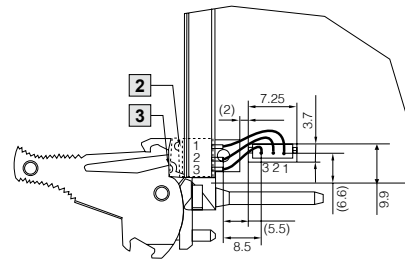

Micro-switch mounting clip



For mounting micro-switches in handles.

| Packs of | Order No. |
|----------|-----------------|
| 10 | 3684.411 |

Plastic covers



For PCBs


For mechanical protection of the component side and of the EMC gaskets. Attachment holes as per CPCI or VME-specifications. Optionally available as perforated or solid version.

Material:


0.3 mm plastic, anti-static
Maximum temperature up to 65°C

¹⁾ 0.5 mm plastic, transparent, anti-static
UL 94-V0, maximum temperature up to 65°C

²⁾ 0.5 mm plastic, black, anti-static UL 94-V0,
maximum temperature up to 120°C



| For PCBs | Packs of | Order No. | | | |
|--------------|----------|------------------------------|------------------------------|-----------------|-----------------|
| | | for CPCI | | for VME | |
| | | perforated ¹⁾ | solid ¹⁾ | solid | solid |
| 3 U x 160 mm | 1 | 3687.932 | 3686.572 | 3685.966 | 3685.626 |
| | 5 | – | – | – | 3685.279 |
| 3 U x 220 mm | 1 | – | – | – | 3685.805 |
| | 5 | – | – | – | 3685.266 |
| 6 U x 80 mm | 1 | 3687.933 | 3686.573 | 3686.037 | 3686.146 |
| | 1 | 3687.934 | 3686.574 | 3685.967 | 3685.627 |
| 6 U x 160 mm | 1 | 9905.574²⁾ | 9905.990²⁾ | – | – |
| | 5 | – | – | – | 3685.280 |
| 6 U x 220 mm | 1 | – | – | – | 3685.824 |
| | 5 | – | – | – | 3685.000 |



! Also required:

Required for mounting the perforated CPCI covers:
Mounting clips, Packs of = 100
order no. 3687.955