



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Sensor/Actuator cable - SAC-3P- 5,0-647/FR SCO BK - 1410265

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 3-position, TPE, yellow RAL 1021, free cable end, on Socket angled M12 SPEEDCON, A-coded, Cable length: 5 m



### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 1 pc          |
| Weight per Piece (excluding packing) | 1.0 g         |
| Country of origin                    | United States |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65/IP67                        |

#### General

|                              |                               |
|------------------------------|-------------------------------|
| Rated current at 40°C        | 4 A                           |
| Rated voltage                | 250 V                         |
| Number of positions          | 3                             |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | No                            |
| Protective circuit/component | Unwired                       |
| Overvoltage category         | II                            |
| Degree of pollution          | 3                             |
| Torque                       | 0.4 Nm (M12 connector)        |

## Sensor/Actuator cable - SAC-3P- 5,0-647/FR SCO BK - 1410265

### Technical data

#### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |
| Sealing material                       | NBR   |

#### Standards and Regulations

|  |                 |
|--|-----------------|
| Standard designation                   | M12 connector   |
| Standards/regulations                  | IEC 61076-2-101 |
| Flammability rating according to UL 94 | HB              |

#### Cable

|                                    |   |
|------------------------------------|---|
| Cable type                         | TPE yellow 105 °C                             |
| Cable type (abbreviation)          | 647   |
| UL AWM style                       | 20327 (105°C/300 V)                           |
| AWG signal line                    | 18  |
| Conductor structure signal line    | 41x 0.16 mm                                   |
| Core diameter including insulation | 1.8 mm  |
| Thickness, insulation              | 0.23 mm                                       |
| Overall twist                      | 3 wires, twisted                              |
| External sheath, color             | yellow  |
| Outer sheath thickness             | 0.89 mm                                       |
| External cable diameter D          | 5.7 mm ±0.25 mm                               |
| Cable weight                       | 23 kg/km                                      |
| Outer sheath, material             | TPE   |
| Material conductor insulation      | PVC   |
| Nominal voltage, cable             | 300 V   |
| Flame resistance                   | According to FT1                              |
| Resistance to oil                  | OIL RES I according to UL 2256                |
| Other resistance                   | UV resistant (720 h) to UL 2256               |
| Ambient temperature (operation)    | -30 °C ... 105 °C (cable, fixed installation) |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27061801 |
|------------|----------|

## Sensor/Actuator cable - SAC-3P- 5,0-647/FR SCO BK - 1410265

### Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

### Accessories

#### Accessories

##### Protective cap

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



---

#### Safety locking

Locking clip - SAC-M12-EXCLIP-F - 1558991



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

---

#### Screwdriver tools

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits



## Sensor/Actuator cable - SAC-3P- 5,0-647/FR SCO BK - 1410265

### Accessories

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224




Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---


### Drawings

Schematic diagram



Pin assignment M12 socket, 3-pos., A-coded, view female side


Cable cross section



TPE yellow 105 °C [647]


## Sensor/Actuator cable - SAC-3P- 5,0-647/FR SCO BK - 1410265

Dimensional drawing



M12 x 1 socket, angled

Circuit diagram

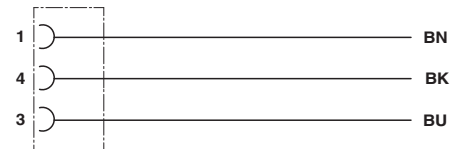

Contact assignment of the M12 socket