

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

6

5

4

3

2

1

REVISIONS					
REV.	ECR#	ZONE	DESCRIPTION	CHANGED BY/DATE	APPROVED BY/DATE
AA			INITIAL RELEASE	MJM 10/15/13	ER 10/15/13
F1	ECN-IAS-02069		CHANGE PER IAS-ENG-001 UPDATED PIM LEVEL	MJM 2FEB14	ER 2FEB14
F2	ECN-IAS-2403		CHANGED MOUNTING CONFIGURATION	MJM 10JUN14	SJ 10JUN14

D

D

C



C

B

B

A

A

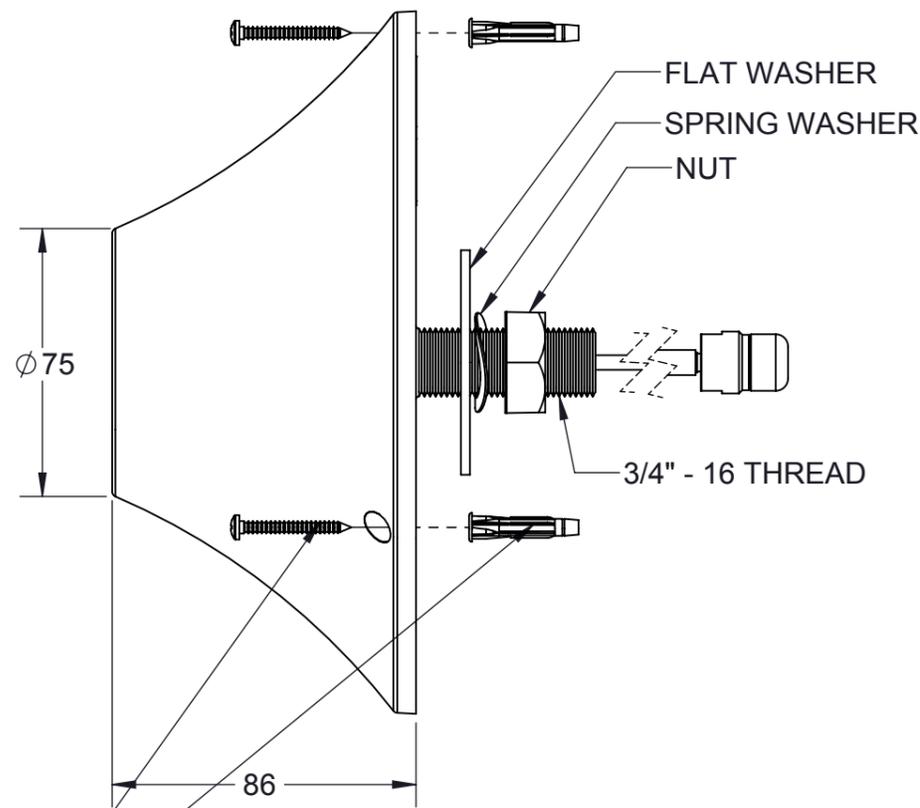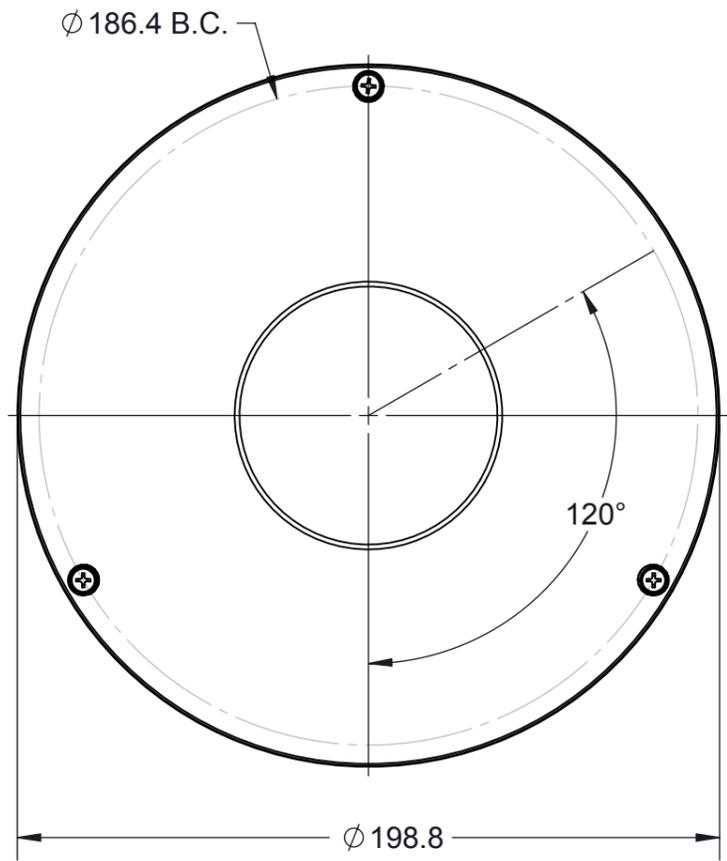

#6 x 1-1/4" MOUNTING SCREWS AND ANCHORS

Parameter	Performance
Model Number	CMS69273-30NF
Frequency	698-806 MHz
	824-894 MHz
	925-960 MHz
	1575 MHz
	1710-1885 MHz
	1920-1980 MHz
	2110-2170 MHz
	2500-2700 MHz
Peak Gain (Typical)	700-960 MHz Gain = 1 dBi
	1700-2700 MHz Gain = 3 dBi
Polarization	Linear, Vertical
VSWR (698-960 MHz / 1710-2700 MHz)	2.0:1 Max.
VSWR (1575 MHz)	2.5:1 Max.
PIM Level (20W, two tones)	-150 dBc max
Power	25 Watts
Pigtail Length	30cm +/- 1.3cm
RF Connector	TYPE N(f)
Cable Type	Plenum Rated
Radome Color	White
Antenna Weight	0.25 kg

The component(s), including any plating, finishes, coatings, chemicals and surfaces treatments, supplied in this document/drawing must conform and comply with the latest issue of Laird Technologies Specification LT-GES-001, which fully includes but is not limited to all contents of EU Directives 2002/95/EC (RoHS Directive), as well as includes requirements of the Joint Industry Guide standard JIG-101, April 2005. The component(s) in this document/drawing may be subject to a full compound analysis for proof of compliance. The latest issue of Laird Technologies Specification LT-GES-001, (General Specification for the Environment) is readily available upon request from the supplier.

UNLESS OTHERWISE NOTED, THIS DOCUMENT CONTAINS LAIRD TECHNOLOGIES CONFIDENTIAL INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LAIRD TECHNOLOGIES. LAIRD TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPYRIGHT, LAIRD TECHNOLOGIES 2010, ALL RIGHTS RESERVED.

MATERIAL: SEE BOM

FINISH:

APPROVALS		DATE
DRAWN BY	M.McGINNIS	10OCT13
PROJ. ENG.	W. CHANG	10OCT13
APPL. MECH.	E.RUSSELL	10OCT13
MFG.	B.THATCHER	10OCT13

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-2009

TOLERANCES UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN MILLIMETERS

ANGLE: ±30'  
0 PLACE DECIMAL: ±0.5  
1 PLACE DECIMAL: ±0.25  
2 PLACE DECIMAL: ±0.13

SURFACE ROUGHNESS 1.6/√



MANCHESTER, NH 03103 USA

TITLE: CMS69273P ASSEMBLY DRAWING

SIZE A3 DWG. NO. CMS69273P-30NFMO REV F2

SCALE: 1:5 PREVIOUS# SHEET 1 OF 1

6

5

4

3

2

1