



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

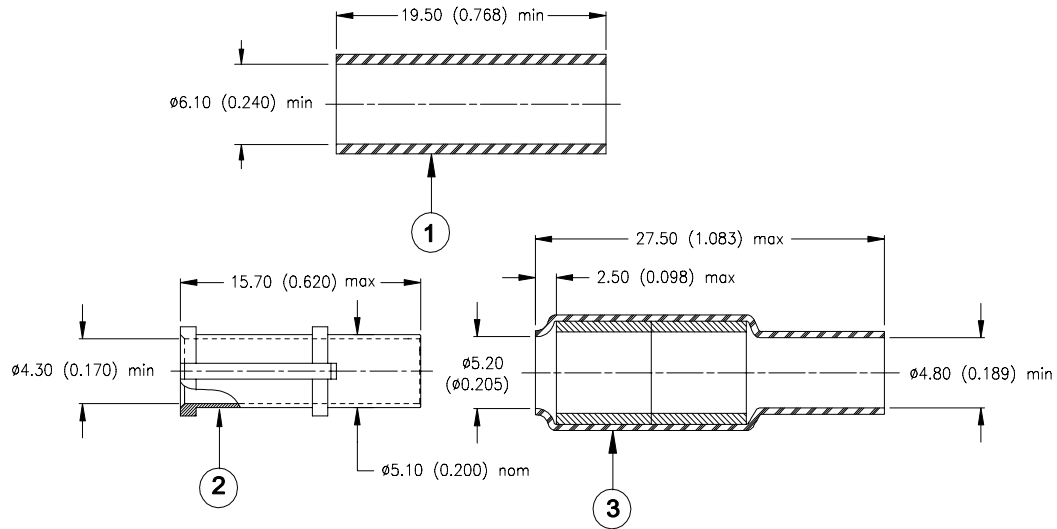

MATERIALS


1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
3. SEALING SLEEVE:
 - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
 - Melttable sealing rings: Fluorocarbon-based thermoplastic.

APPLICATION

1. These parts are used on Tyco Electronics/Raychem Hexashield adaptors.
2. Cable Type: Single or multi-conductors unshielded cable.
3. Temperature range: -65°C to +175°C.
4. For all other application, contact Tyco Electronics/Raychem technical service.

Cable dimensions:

ϕA max. = 4.2mm

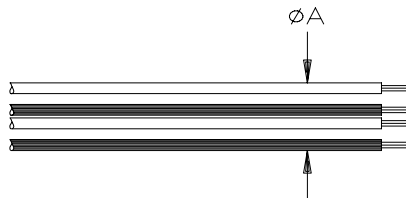

PART NUMBERING

HET-A-03X

→ Ferrule Plating:

- B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test
- C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-03.

		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: FERRULE AND HEAT-SHRINKABLE SLEEVE FOR HEXASHIELD ADAPTORS		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem		DOCUMENT NO.: HET-A-03X		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: A	DATE: 11-May-07	
DRAWN BY: K. YEE	CAGE CODE: 06090	REPLACES: D030534	ECO NUMBER: 07-010934	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2006-2007 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check the latest revision.