



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART NUMBER  
10124234-061005LF

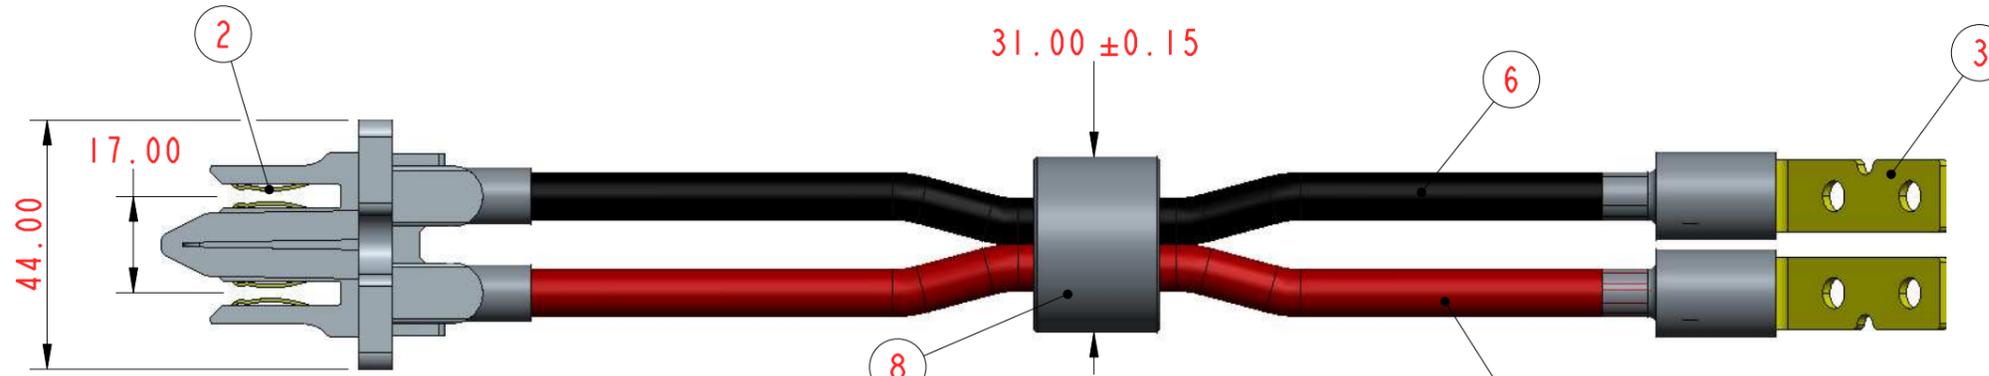

KING CORE PN: K5B T3x22.22x19  
OR  
STEWART PN: 28B1250-000

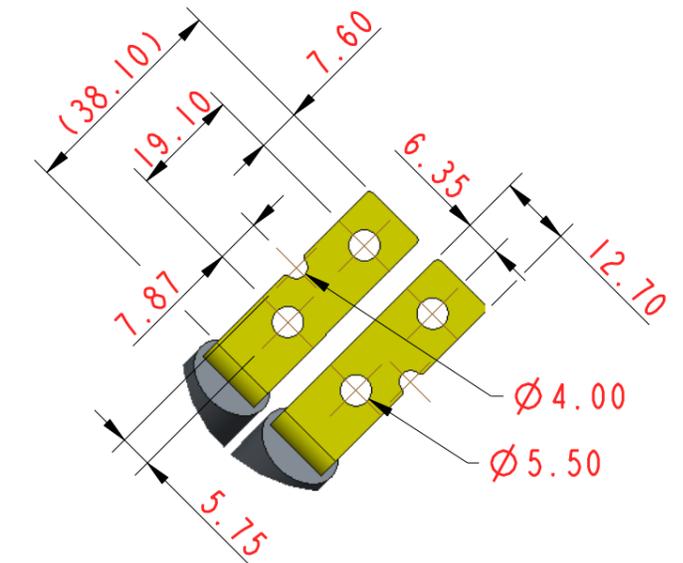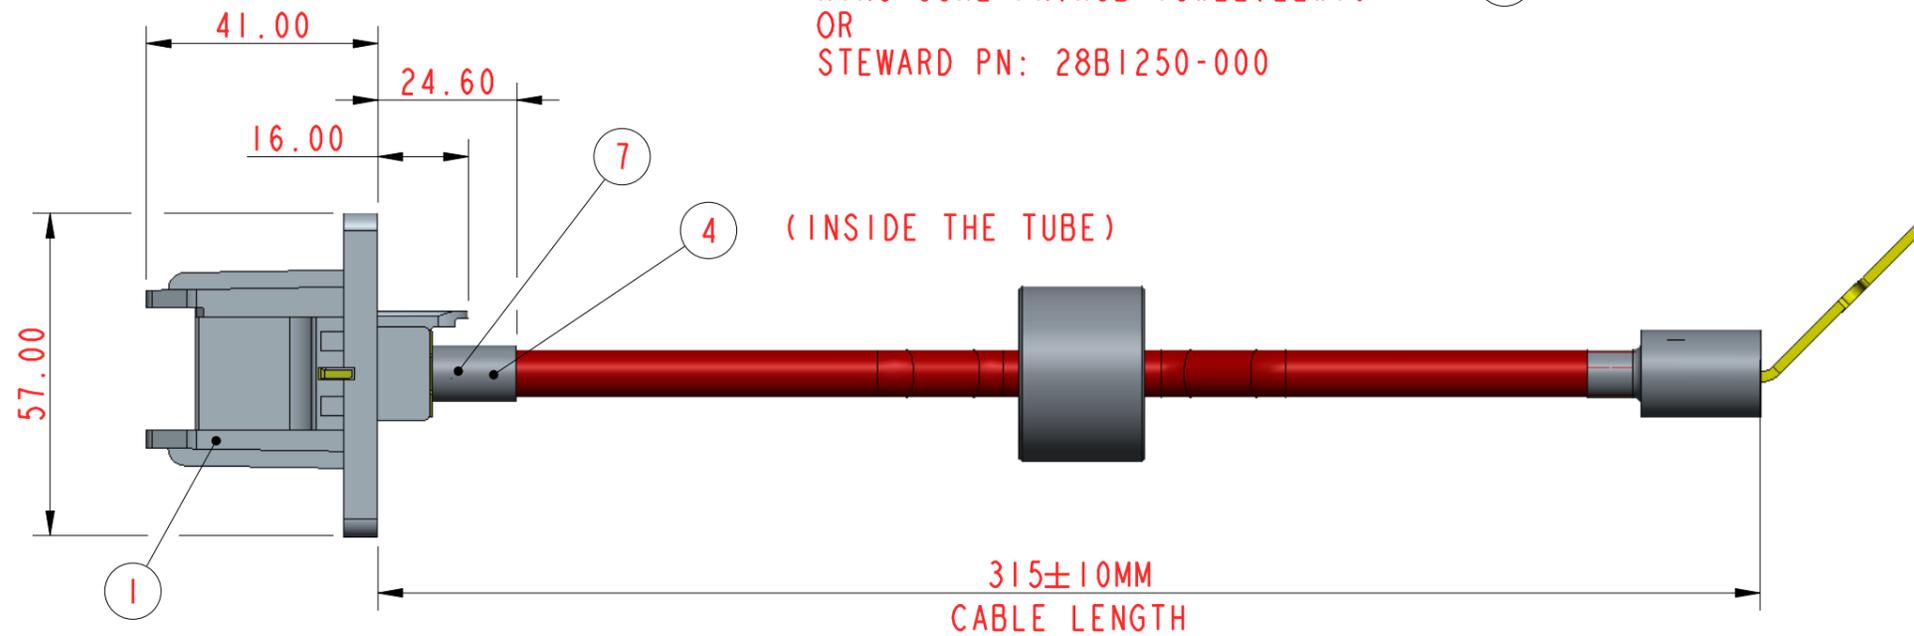

ITEM NO.	DESCRIPTION	Q'TY
1	HOUSING, THERMOPLASTIC RESIN, UL94V-0	1
2	MATING CONTACT, HIGH CONDUCTIVITY COPPER ALLOY, TIN PLATED.	2
3	FLAT CONTACT, HIGH CONDUCTIVITY COPPER ALLOY, TIN PLATED	2
4	SECONDARY CRIMPING BARREL, COPPER ALLOY, NICKEL PLATED	2
5	FLEXIBLE POWER WIRE, 6 AWG, UL RECONGIZED, 105°C, 600V RED INSULATION COLOR, LEGTH=315mm (HSG TO TERMINAL BENDING)	1
6	FLEXIBLE POWER WIRE, 6 AWG, UL RECONGIZED, 105°C, 600V BLACK INSULATION COLOR, LEGTH=315mm (HSG TO TERMINAL BENDING)	1
7	THERMAL SHRINKAGE TUBING, COLOR BLACK, 0.5mm THICKNESS, LENGTH 25mm MIN.	4
8	CHOKE	1

NOTES:  
(1) ELECTRICAL RATING: 600V, 60A  
(2) WORKING TEMPERATURE: -20-75°C  
(3) REFERENCE DOCUMENTS:  
PRODUCT SPECIFICATION: FCI-GS-12-1127  
PACKAGEING SPECIFICATION: FCI-GS-14-2295  
(4) RoHS COMPLIANT.

spec ref	dr	BEER FU	2013-06-26	projection	MM	size	A3	scale	1:1
tolerance std	eng	BEER FU	2013-06-26			ecn no	rel level	RELEASED	
TOLERANCES UNLESS OTHERWISE SPECIFIED surface ✓	chr	BEER FU	2013-06-26					product family	
	appr	BEER FU	2013-06-26	BUSBAR POWER CABLE		10124234-061005LF		rev A	
	linear	0.X	±0.50	STRAIGHT WIRE OUTLET		10124234-061005LF		A	
	0.XX	±0.20	CUSTOMER		sheet 1 of 1				
	0.XXX	±0.10							
	angular	0°	±2°						



Copyright FCI.