



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



General Description




- Latest AlphaIGBT (α IGBT) technology
- 650V breakdown voltage
- High efficient turn-on di/dt controllability
- Very high switching speed
- Low turn-off switching loss and softness
- Very good EMI behavior
- Short-circuit ruggedness

Applications

- Power factor correction
- UPS & Solar Inverters
- Very High Switching Frequency Applications
- Welding Machines

Product Summary

V_{CE}	650V
I_C ($T_C=100^\circ\text{C}$)	40A
$V_{CE(sat)}$ ($T_J=25^\circ\text{C}$)	1.9V



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOKS40B65H1	TO247	Tube	240
AOTS40B65H1	TO220	Tube	1000

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOKS40B65H1/AOTS40B65H1	Units
Collector-Emitter Voltage	V_{CE}	650	V
Gate-Emitter Voltage	V_{GE}	± 30	V
Continuous Collector Current	I_C	$T_C=25^\circ\text{C}$ 80	A
		$T_C=100^\circ\text{C}$ 40	
Pulsed Collector Current, Limited by T_{Jmax}	I_{CM}	120	A
Turn off SOA, $V_{CE} \leq 650\text{V}$, Limited by T_{Jmax}	I_{LM}	120	A
Short circuit withstanding time ¹⁾ $V_{GE} = 15\text{V}$, $V_{CC} \leq 300\text{V}$, $T_J \leq 175^\circ\text{C}$	t_{SC}	5	μs
Power Dissipation	P_D	$T_C=25^\circ\text{C}$ 300	W
		$T_C=100^\circ\text{C}$ 150	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175	$^\circ\text{C}$
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	T_L	300	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	AOKS40B65H1/AOTS40B65H1	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	40	$^\circ\text{C/W}$
Maximum IGBT Junction-to-Case	$R_{\theta JC}$	0.5	$^\circ\text{C/W}$

1) Allowed number of short circuits: <1000; time between short circuits: >1s.

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
STATIC PARAMETERS							
BV_{CES}	Collector-Emitter Breakdown Voltage	$I_C=1mA, V_{GE}=0V, T_J=25^{\circ}C$	650	-	-	V	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=15V, I_C=40A$	$T_J=25^{\circ}C$	-	1.9	2.4	V
			$T_J=125^{\circ}C$	-	2.36	-	
			$T_J=175^{\circ}C$	-	2.63	-	
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$V_{CE}=5V, I_C=1mA$	-	4.9	-	V	
I_{CES}	Zero Gate Voltage Collector Current	$V_{CE}=650V, V_{GE}=0V$	$T_J=25^{\circ}C$	-	-	10	μA
			$T_J=125^{\circ}C$	-	-	500	
			$T_J=175^{\circ}C$	-	-	10000	
I_{GES}	Gate-Emitter leakage current	$V_{CE}=0V, V_{GE}=\pm 30V$	-	-	± 100	nA	
g_{FS}	Forward Transconductance	$V_{CE}=20V, I_C=40A$	-	30	-	S	
DYNAMIC PARAMETERS							
C_{ies}	Input Capacitance	$V_{GE}=0V, V_{CC}=25V, f=1MHz$	-	1789	-	pF	
C_{oes}	Output Capacitance		-	129	-	pF	
C_{res}	Reverse Transfer Capacitance		-	64	-	pF	
Q_g	Total Gate Charge	$V_{GE}=15V, V_{CC}=520V, I_C=40A$	-	63	-	nC	
Q_{ge}	Gate to Emitter Charge		-	18	-	nC	
Q_{gc}	Gate to Collector Charge		-	25	-	nC	
$I_{C(SC)}$	Short circuit collector current	$V_{GE}=15V, V_{CC}=300V,$ $t_{sc}\leq 5\mu s, T_J\leq 175^{\circ}C$	-	256	-	A	
R_g	Gate resistance	$V_{GE}=0V, V_{CC}=0V, f=1MHz$	-	14	-	Ω	
SWITCHING PARAMETERS, (Load Inductive, $T_J=25^{\circ}C$)							
$t_{D(on)}$	Turn-On DelayTime	$T_J=25^{\circ}C$ $V_{GE}=15V, V_{CC}=400V, I_C=40A,$ $R_G=7.5\Omega$ Eon and Etotol include diode (AOK40B65H1) reverse recovery	-	41	-	ns	
t_r	Turn-On Rise Time		-	36	-	ns	
$t_{D(off)}$	Turn-Off Delay Time		-	130	-	ns	
t_f	Turn-Off Fall Time		-	14	-	ns	
E_{on}	Turn-On Energy		-	1.27	-	mJ	
E_{off}	Turn-Off Energy		-	0.46	-	mJ	
E_{total}	Total Switching Energy		-	1.73	-	mJ	
SWITCHING PARAMETERS, (Load Inductive, $T_J=175^{\circ}C$)							
$t_{D(on)}$	Turn-On DelayTime	$T_J=175^{\circ}C$ $V_{GE}=15V, V_{CC}=400V, I_C=40A,$ $R_G=7.5\Omega$ Eon and Etotol include diode (AOK40B65H1) reverse recovery	-	38	-	ns	
t_r	Turn-On Rise Time		-	44	-	ns	
$t_{D(off)}$	Turn-Off Delay Time		-	155	-	ns	
t_f	Turn-Off Fall Time		-	18	-	ns	
E_{on}	Turn-On Energy		-	1.35	-	mJ	
E_{off}	Turn-Off Energy		-	0.8	-	mJ	
E_{total}	Total Switching Energy		-	2.15	-	mJ	

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

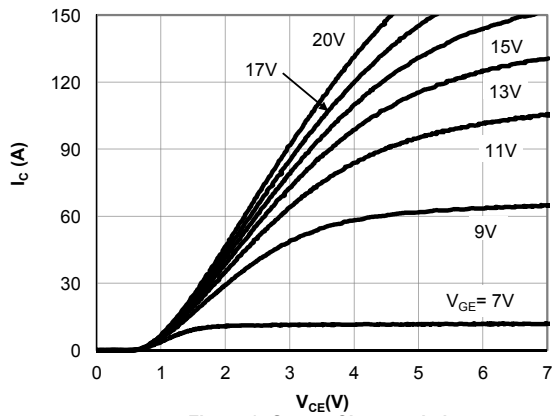


Figure 1: Output Characteristic
($T_J=25^{\circ}\text{C}$)

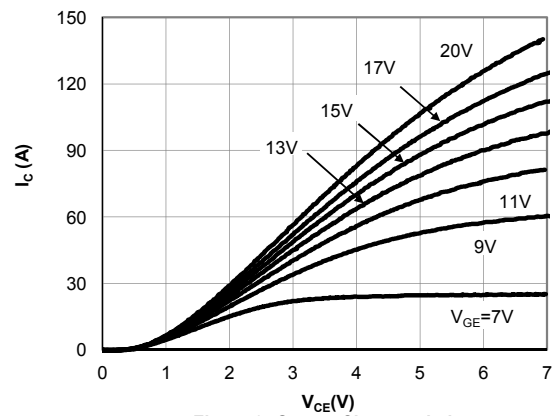


Figure 2: Output Characteristic
($T_J=175^{\circ}\text{C}$)

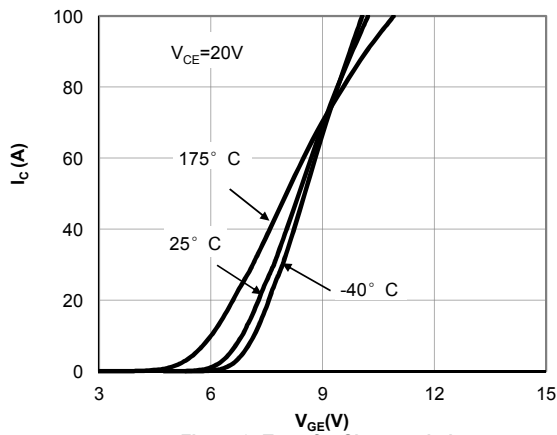


Figure 3: Transfer Characteristic

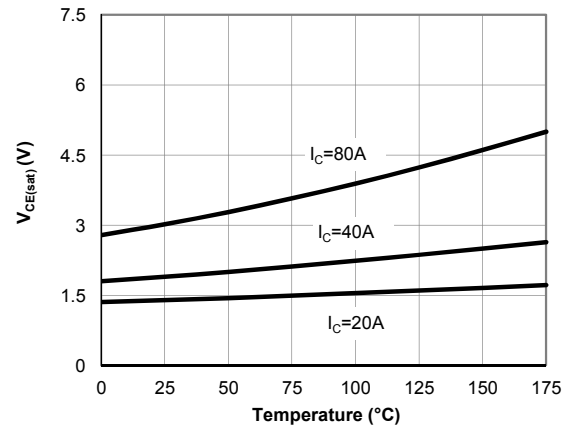


Figure 4: Collector-Emitter Saturation Voltage vs.
Junction Temperature

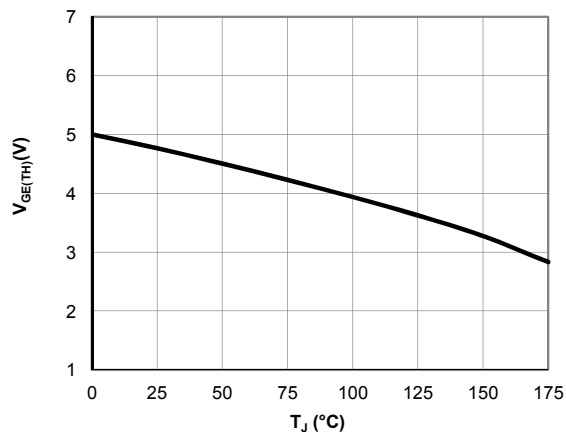


Figure 5: $V_{GE(TH)}$ vs. T_J

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

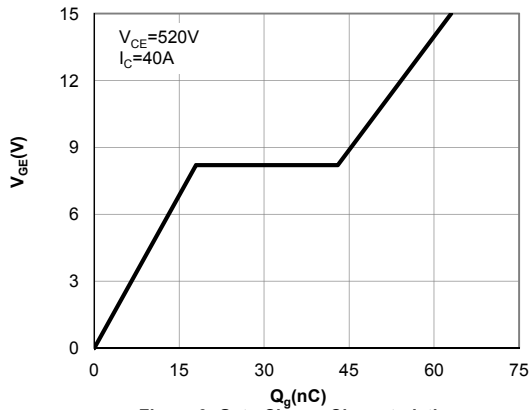


Figure 6: Gate-Charge Characteristics

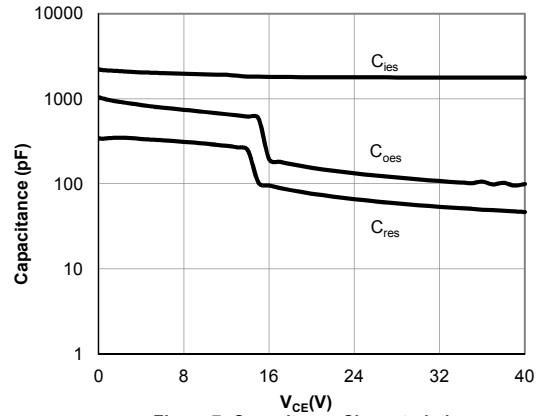


Figure 7: Capacitance Characteristic

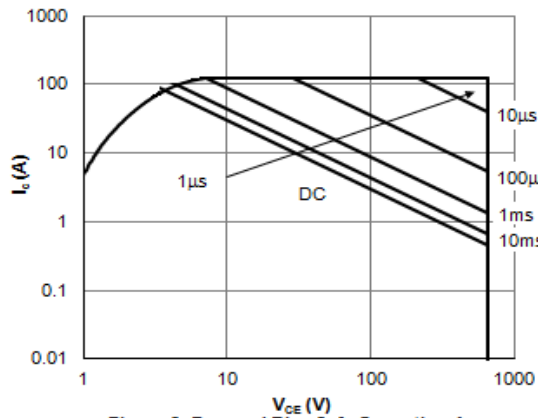


Figure 8: Forward Bias Safe Operating Area
($T_C = 25^\circ\text{C}$, $V_{GE} = 15\text{V}$)

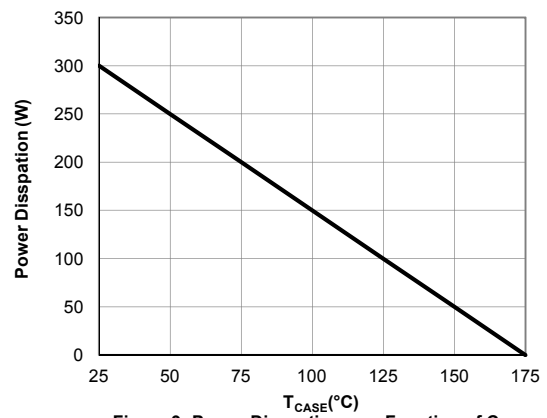


Figure 9: Power Dissipation as a Function of Case

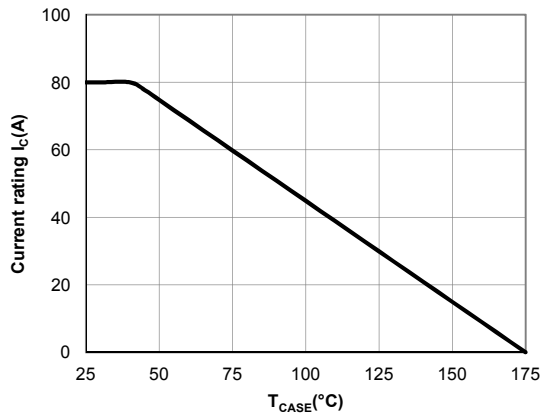


Figure 10: Current De-rating







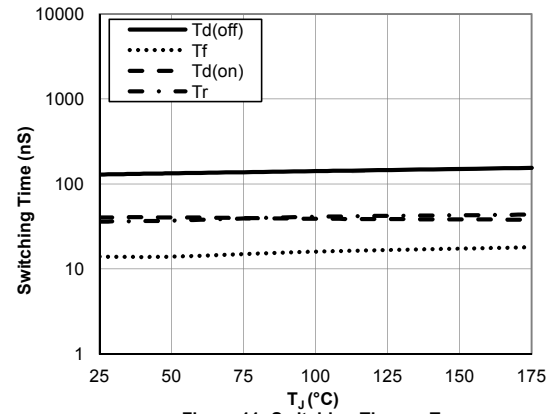


Figure 11: Switching Time vs. T_J
($V_{GE} = 15\text{V}$, $V_{CE} = 400\text{V}$, $I_C = 40\text{A}$, $R_g = 7.5\Omega$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

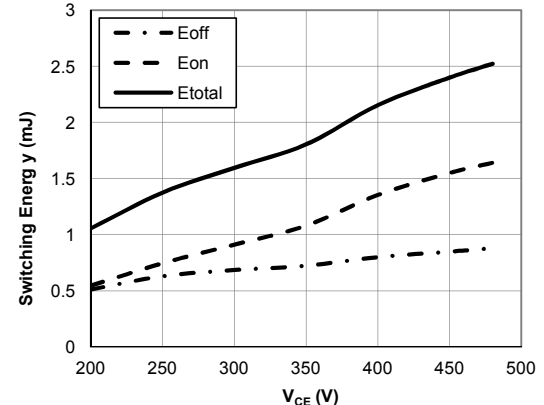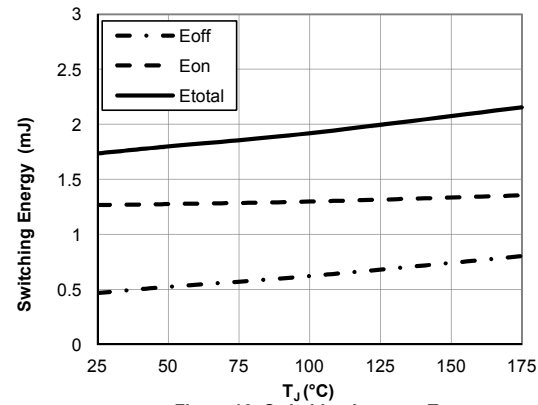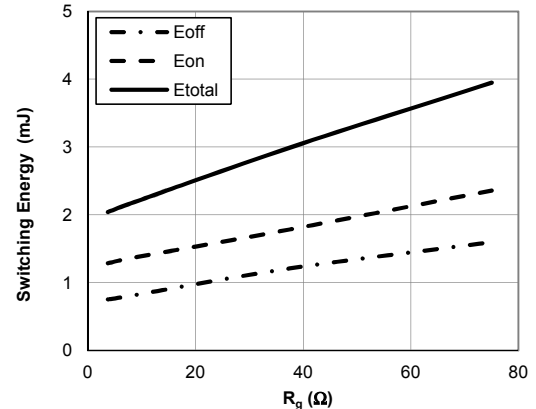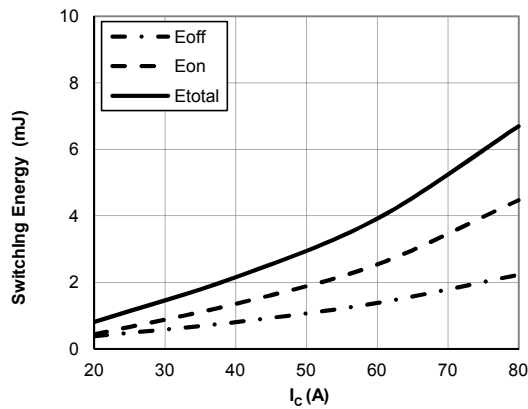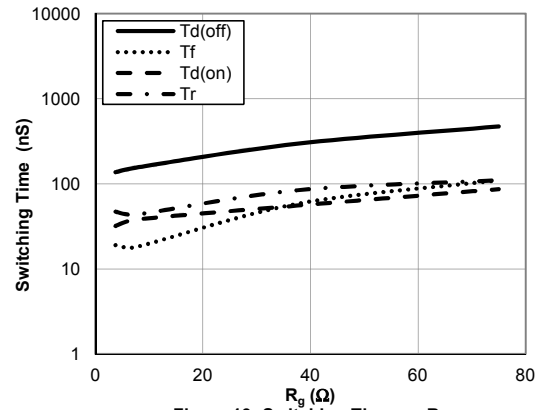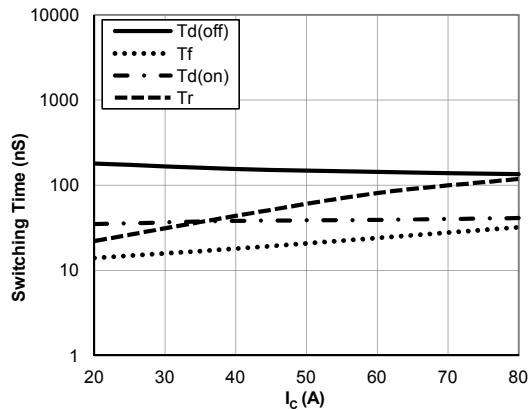

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


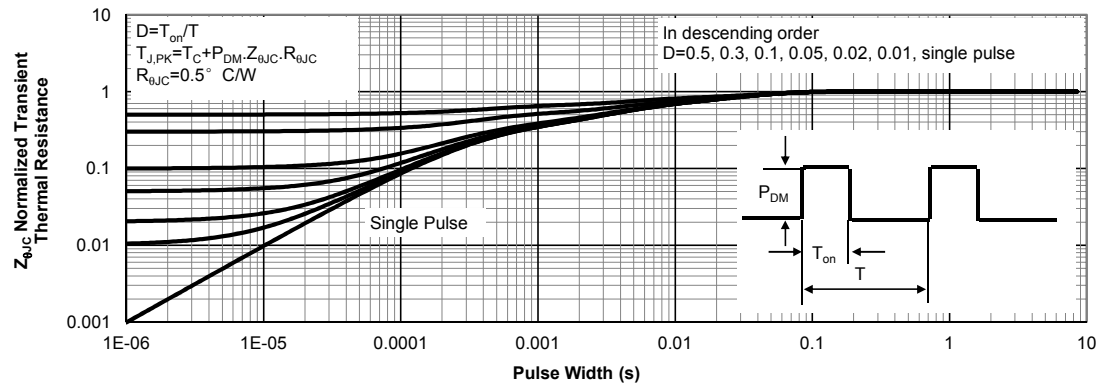


Figure 18: Normalized Maximum Transient Thermal Impedance for IGBT

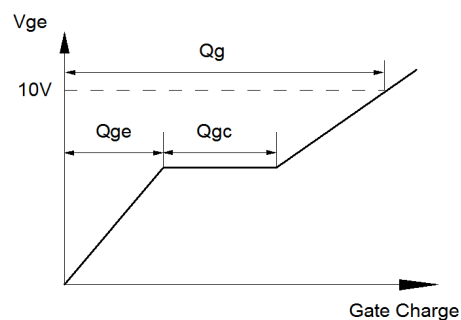

Gate Charge

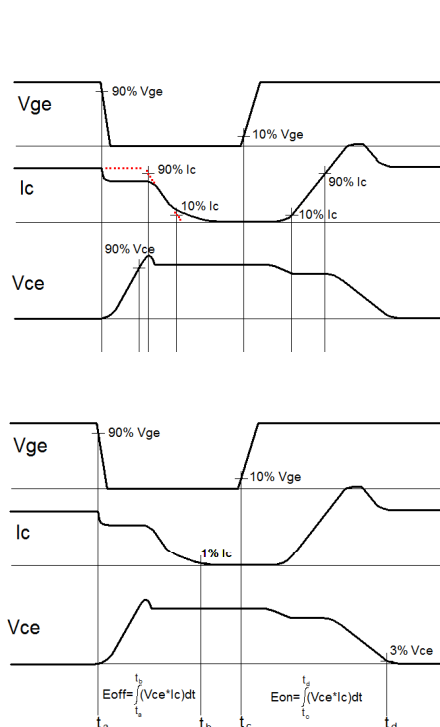


Figure B: Inductive Switching Test Circuit & Waveforms