



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SMD Seam Sealing Crystals 3.2 x 2.5 x 0.7 mm AM Series

Automotive
Application Series

Features

- Reliable seam sealed ceramic package.
- Wide operating temperature range.
- Superior performance and stringent reliability in harsh environment.
- Application: TPMS, ECM, ABS and sensor modules.
- Compact size.
- RoHS Compliant / Pb Free.






Electrical Specifications

Item / Type	AM
Frequency Range	10 ~ 50 MHz
Overtone	Fundamental
Frequency Tolerance (at 25 °C)	± 10 ppm, ± 20 ppm, ± 50 ppm Max
Frequency Stability Over Operating Temperature Range	± 150 ppm Max. , or specify
Operating Temperature Range	- 40 ~ +125 °C , or specify
Drive Level	10 μW (typical) ; 100 μW (Max.)
Load Capacitance	12 pF, or specify
Storage Temperature Range	- 40 ~ +125 °C
Reliability Standard	AEC-Q200

Equivalent Series Resistance(ESR)

Fundamental	
10 ~ 12 MHz	180 Ω Max.
12 ~ 20 MHz	100 Ω Max.
20 ~ 30 MHz	80 Ω Max.
30 ~ 50 MHz	60 Ω Max.

Dimensions

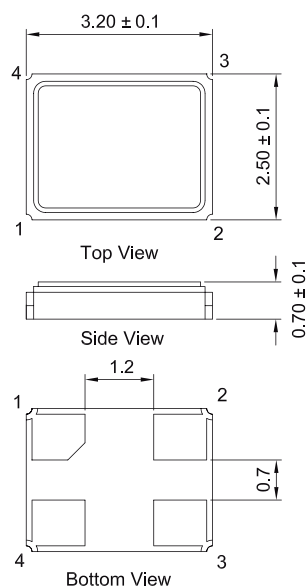

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>