



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





global solutions :
local support™

RooTenna® 2 Panel Antenna 4940 to 5850 MHz Operation

The RooTenna® panel antenna offered by Laird Technologies is designed to allow integration of the customers' radio equipment inside the weatherproof compartment. The radio compartment is big enough to house transceivers, amplifiers, and other electronic equipment. The unit is complete with a removable customer mounting plate for mounting of customer electronics and an RJ45 passthru ethernet feedthru. The housing is UV stabilized ABS plastic. The backplate is alodine coated aluminum with stainless steel fasteners. All bracket fasteners are stainless steel for corrosion protection.

Features and Benefits:


- RooTenna®, the antenna with a pouch!
- Low profile 24dBi antenna gain
- 16.25" x 14.75" x 1.25" weatherproof radio compartment
- Low heat absorption white UV protected housing
- Vertical or horizontal polarization, Beamwidth 9deg
- Available with RPSMA, RPTNC, MC Card, MMCX, RPMCCX and U.FL antenna connector

Applications

- Integrated radio/antenna units
- WISP CPE equipment
- Amplified antennas
- 802.11a applications

For sales information:
Telephone 800-323-3757
E-Mail sales@pacwireless.com


or visit: www.pacwireless.com



Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	4940		5850	MHz
VSWR (4940-4990MHz <2.0)		1.5:1		
Impedance		50		OHM
Input Power			20	W
Operating Temperature	-45		+70	Deg C
Gain		24		dBi
3db Beam Angle (E-Plane)		9		Deg
3dB Beam Angle (H-Plane)		9		Deg
Front to Back	30			dB
Weight		6 (2.7)		Lb (kg)
Compartment Dim(L x W x H)	16.25" x 14.75" x 1" (413 x 375 x 25)			In (mm)
Outside Dim (L x W x H)	18.5" x 16.8" x 2.5" (470 x 427 x 64)			In (mm)

Antenna Pattern at 5850 MHz

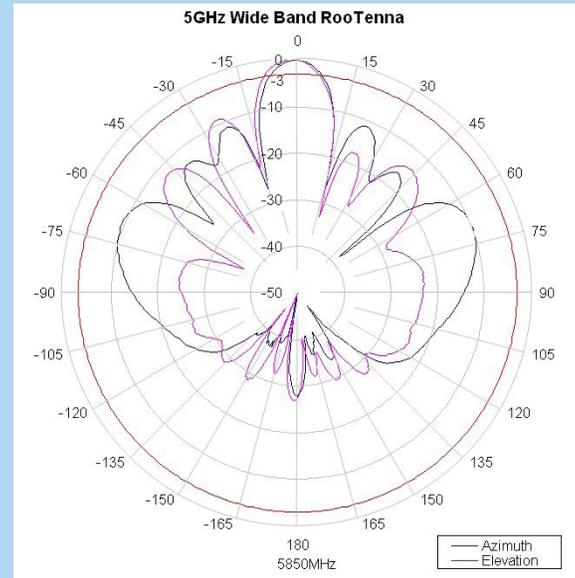

Wind Loading

	100MPH	125MPH	100MPH with ½" Radial Ice
Force (Lbs)	77.8	121	83

System Ordering:

R2T58-24-XXXX 4900-5850MHz 24dBi high gain RooTenna® compartment antenna

XXXX= connector type

Please specify RSMA, RTNC, MMCX, RMMCX, MC or UFL when ordering



Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

Specifications subject to change without notice.

