



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



101HS185
PAGE 1 OF 1

M

DRAWING
NUMBER

4

ISSUE

REPLACES

PR-19328

RELEASE NO.

CHECK

18 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91


16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

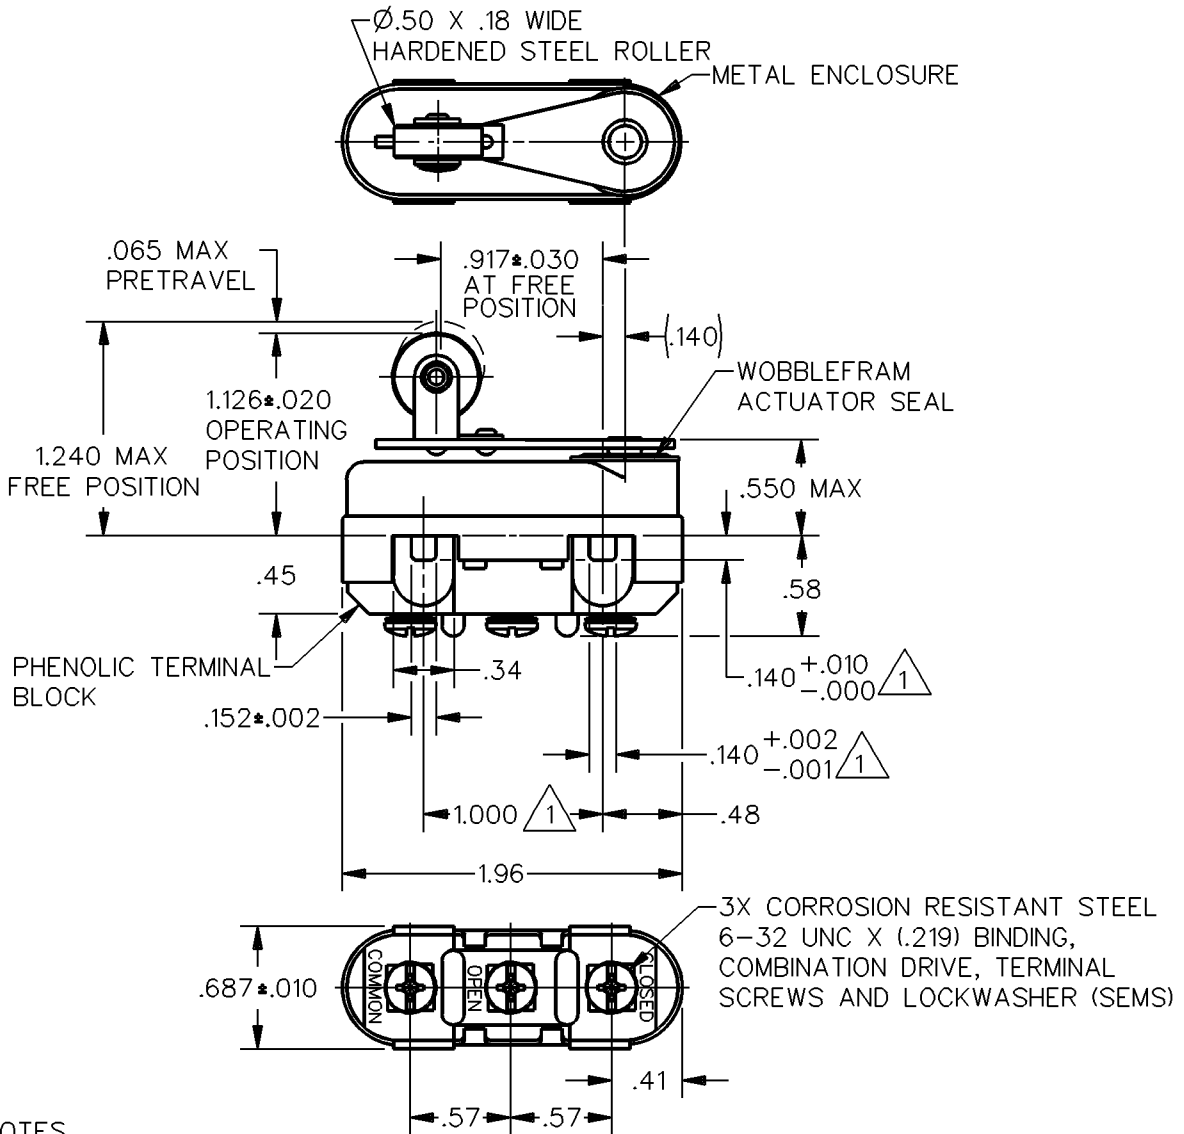


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing.139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - TRAVEL CHARACTERISTICS ARE REFERENCED FROM THE UPPER SURFACE OF MOUNTING HOLES WITH THIS CONSTRUCTION
- 3 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM -65°F TO 300°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 10-30 OZ
RELEASE FORCE — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — — .020 MAX
OVERTRAVEL — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD
28 VDC	8 AMP	15 AMP
125 VAC	1 AMP	.5 AMP

L277

1A 125 VAC, 5A 28 VDC



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.01) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES \pm

WEIGHT 1.8 OZ MAX

FORMTEK

DRAWN

T S M

27 JUN 91

16 JUL 91

16 JUL 91

16 JUL 91