



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




FUSES

Non resettable fuses

FSQ 5 × 20

Miniature Fuses Type FSQ 5 × 20

quick-acting F
Glass tube

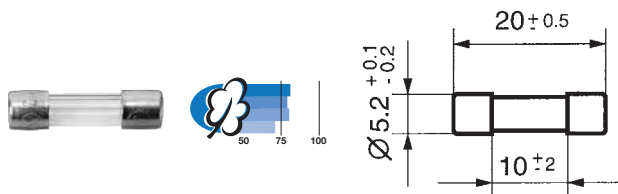

Standards

UL 248-14
CSA C22.2 No. 248.14


Approvals

UL
CSA

Pre-arcing time/current characteristic (at T_a 23 °C)

$n \cdot I_n$	$1,1 \cdot I_n^*$	$1,35 \cdot I_n$	$2 \cdot I_n$
Rated current I_n	min.	max.	max.
400 mA–3,5A	4 h	1 h	120 s

* Non fusing current I_{nf}

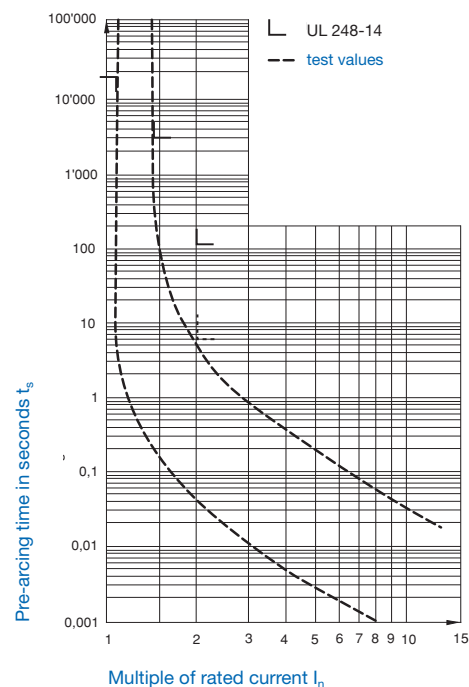

Order No.	Rated current I_n Rated voltage U_n	Breaking capacity	Voltage drop	Sustained power dissipation	Pre-arcing I^2t	Approvals UL CSA
			at I_n typ. mV	at $1,1 I_n$ typ. W	at $10 \cdot I_n$ typ. A ² s	
0034.3951	400 mA / 250 V	10 000 A / 125 V AC, p.f. / cos φ 0,7-0,8	170	0,1	$8,2 \cdot 10^{-1}$	• •
0034.3952	500 mA / 250 V		140	0,1	$2,11 \cdot 10^{-1}$	• •
0034.3953	600 mA / 250 V		150	0,1	$2,58 \cdot 10^{-1}$	• •
0034.3954	700 mA / 250 V	35 A / 250 V AC, p.f. / cos φ 0,7-0,8	150	0,2	$4,17 \cdot 10^{-1}$	• •
0034.3955	750 mA / 250 V		150	0,2	$6 \cdot 10^{-1}$	• •
0034.3956	800 mA / 250 V		140	0,2	$6,62 \cdot 10^{-1}$	• •
0034.3957	1 A / 250 V	10 000 A / 125 V AC, p.f. / cos φ 0,7-0,8	120	0,2	1,15	• •
0034.3958	1,2 A / 250 V		110	0,2	1,82	• •
0034.3959	1,25 A / 250 V		110	0,2	1,84	• •
0034.3960	1,5 A / 250 V		110	0,3	3,11	• •
0034.3961	1,6 A / 250 V		110	0,3	3,84	• •
0034.3962	1,8 A / 250 V		100	0,3	4,07	• •
0034.3963	2 A / 250 V		100	0,3	4,51	• •
0034.3964	2,25 A / 250 V		100	0,3	6,77	• •
0034.3965	2,5 A / 250 V		100	0,4	11,1	• •
0034.3966	2,8 A / 250 V		100	0,5	12,7	• •
0034.3967	3 A / 250 V		100	0,5	14,8	• •
0034.3968	3,2 A / 250 V		100	0,5	19,2	• •
0034.3969	3,5 A / 250 V		90	0,5	26,3	• •