



| REV. | DESCRIPTION | DATE | APPROVED |
|------|--------------------------------|----------|----------|
| D | Engineering Update w/o Changes | 02/26/04 | M. C. |
| E | Materials Update | 07/10/14 | J. C. |
| F | Engineering Update w/o Changes | 05/13/16 | J. C. |
| | | | |

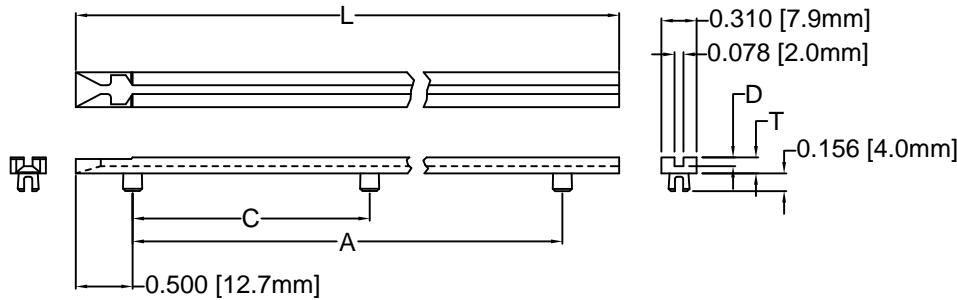



| PART NO. | L ±.062 (1.6) | A +.016 (.41) -.032 (.81) | C +.016 (.41) -.032 (.81) | D ±.005 (.1) | T ±.005 (.1) | DESC DWG. NO. |
|----------|------------------|---------------------------------|---------------------------------|-----------------|-----------------|------------------|
| E-200 | 2.0 (50.8) | 1.016 (25.8) | N/A | .078 (2.0) | .125 (3.2) | - |
| E-250 | 2.5 (63.5) | | | | | 84006-01 |
| E-300 | 3.0 (76.2) | 1.516 (38.5) | N/A | .078 (2.0) | .125 (3.2) | 84006-02 |
| E-350 | 3.5 (88.9) | | | | | 84006-03 |
| E-400 | 4.0 (101.6) | | | | | 84006-04 |
| E-450 | 4.5 (114.3) | 3.016 (76.6) | N/A | .078 (2.0) | .125 (3.2) | 84006-05 |
| E-500 | 5.0 (127.0) | | | | | 84006-06 |
| E-550 | 5.5 (139.7) | | | | | 84006-07 |
| E-600 | 6.0 (152.4) | 5.016 (127.4) | N/A | .078 (2.0) | .125 (3.2) | 84006-08 |
| E-650 | 6.5 (165.1) | | | | | 84006-09 |
| E-700 | 7.0 (177.8) | | | | | 84006-10 |
| E-750 | 7.5 (190.5) | 6.031 (153.2) | N/A | .078 (2.0) | .125 (3.2) | 84006-11 |
| E-800 | 8.0 (203.2) | | | | | 84006-12 |

| PART NO. | L ±.062 (1.6) | A +.016 (.41) -.047 (1.2) | C +.016 (.41) -.032 (.81) | D ±.005 (.1) | T ±.007 (.2) | DESC DWG. NO. |
|----------|------------------|---------------------------------|---------------------------------|-----------------|-----------------|------------------|
| E-850 | 8.5 (215.9) | | | | | 84006-13 |
| E-900 | 9.0 (228.6) | 7.531(191.3) | 3.766 (95.7) | .078 (2.0) | .141 (3.6) | 84006-14 |
| E-950 | 9.5 (241.3) | | | | | 84006-15 |
| E-1000 | 10.0 (254.0) | | | | | 84006-16 |
| E-1050 | 10.5 (266.7) | 9.031(229.4) | 4.516 (114.7) | .078 (2.0) | .141 (3.6) | 84006-17 |
| E-1100 | 11.0 (279.4) | | | | | 84006-18 |
| E-1150 | 11.5 (292.1) | | | | | 84006-19 |
| E-1200 | 12.0 (304.8) | 10.547(267.9) | 5.274 (134.0) | .093 (2.4) | .156 (4.0) | 84006-20 |
| E-1250 | 12.5 (317.5) | | | | | 84006-21 |
| E-1300 | 13.0 (330.2) | | | | | 84006-22 |
| E-1350 | 13.5 (342.9) | 12.047(306.0) | 6.024 (153.0) | .093 (2.4) | .156 (4.0) | 84006-23 |
| E-1400 | 14.0 (355.6) | | | | | 84006-24 |

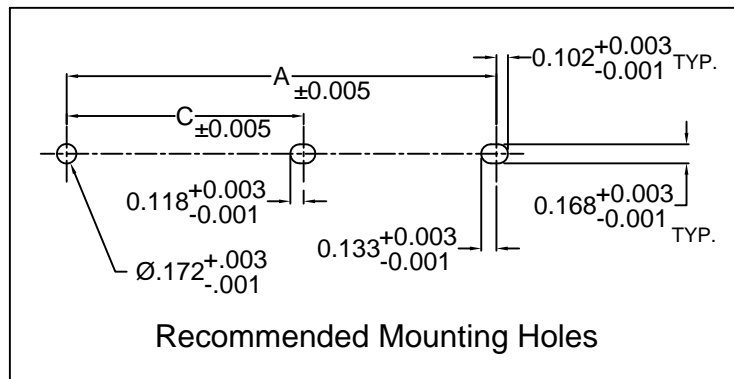

2. MATERIAL: NYLON 66, 15% GLASS, 94V-0, BLACK.

1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101.

| | | | |
|--|--------------------------|---|--|
| STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) | |  4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974 | |
| DECIMALS | ANGULAR | | |
| .X ±.1 | X° ± 1° |  TITLE: ECON-O-GIDE PRESS-IN CARD GUIDE | |
| .XX ±.01 | | | |
| .XXX ±.005 | | PART NO: E-XXX | |
| DESIGNED: S. Irving | DATE: 08/10/98 | REVISION: F | |
| CHECKED: D. Green | DATE: 12/03/02 | CAGE CODE : 32559 SHEET # 1 OF 1 | |
| CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING. | | | |