

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	0A
Termination type	Male solder
IP rating	50
Cable Ø	2.20 - 2.60 mm
Matching parts	ERA.0A.250.CTL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C27: 2.2 - 2.6 mm
Variant	Z : Nut for fitting a bend relief

### Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	
Rated Current	

### Specifications

Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	1000


### Others

IP Rating:	50
------------	----

---

## DRAWINGS

### Draws

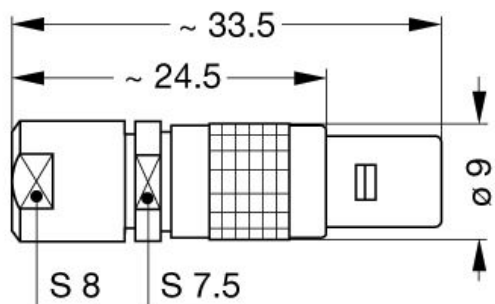

### Dimensions

	A	B	L	M	S1	S2
mm.	9	9	37	27.5	7.5	7
in.	0,35	0,35	1,46	1,08	0,30	0,28

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables