

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Tuning Fork Crystals

Cardinal's tuning fork crystals provide a cost-effective approach for time-management products.

Series **CTF6**
CTF8



Part Numbering Example: CTF6 - A1 C3 - 32.768K D12.5

| CTF6 | A* | C3 | 32.768K | D12.5 |
|--------|----------------|--------------------|-----------|-----------------|
| SERIES | ADDED FEATURES | OPERATING TEMP. | TOLERANCE | LOAD CAP. |
| CTF6 | Call Marketing | A0 = -10°C ~ +60°C | C1 = ±100 | D6 = 6.0 pF |
| CTF8 | | A1 = -10°C ~ +70°C | C2 = ± 50 | D12.5 = 12.5 pF |
| | | A2 = -40°C ~ +85°C | C3 = ± 30 | |
| | | | C4 = ± 10 | |

*NOTE: The above ABC combinations cover basic specification options. We tailor our crystal specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.

Specifications:

Frequency Range: 32.768 KHz *Standard*

Operating Temperature: -10°C ~ +60°C *Standard*

Temperature Coefficient: $-(0.035 \pm 0.008)$ ppm/°C²

Frequency Tolerance: ±30 ppm *Standard*
(at 25°C)


Load Capacitance: 12.5 pF, 6.0 pF

Resistance: 50,000Ω Max (BT Cut)

Standard: Shunt Capacitance: 1.7 pF Max
Aging: ± 3 ppm Max first year
Drive Level: 1 μW Max

Optional Features: Call Marketing

CTF8

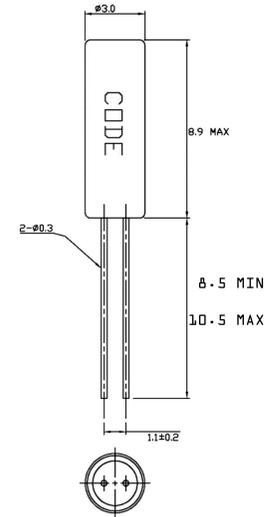

CTF6

