



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



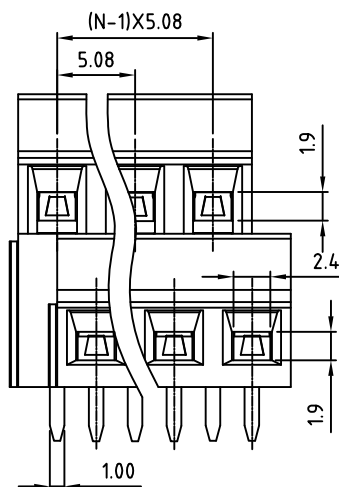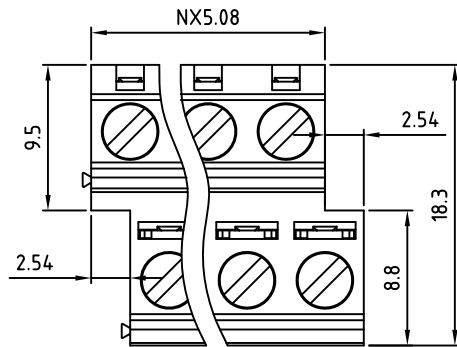

N=Number of poles

P.C.B. LAYOUT

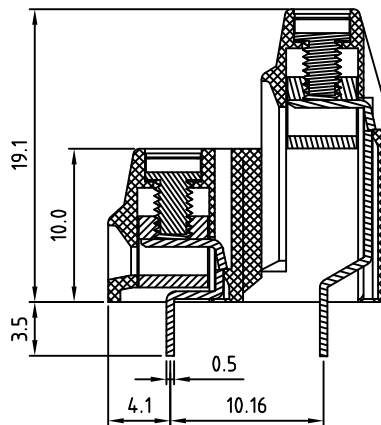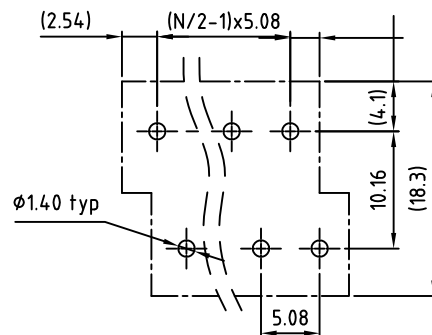

SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	CUL approval added	Lee
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Technical Data:

Material:

- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel zine plating "-"-slot type
- Surface of soldertail: Brass with Tin plating
- Insulator (housing): Thermoplastic(UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire range:
 - Solid Wire(AWG): 16-26
 - Stranded wire(AWG): 16-26

- Wire strip length: 6~7mm
- Withstanding Voltage:1.6kv

Mechanical:

- Operating temperature: -30°C to +105°C
- Soldering reliability: 250°C±10°C/5 Sec

- △ ● Safety Approval: US

RoHS Compliant

PART NUMBER:


OSTYSXX2150

No. of Poles
 04: 2x02 Poles
 06: 2x03 Poles
 : :
 48 2x24 Poles

COLOR
 0: Black
 5: Green (Standard)
 6: Blue
 8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYS-5.08 Series				
PART NO.	OSTYSXX2150			DWG NO.	OSTYSXX2150.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Jeny 2006.01.11	Jeny 2006.01.11		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV: D	X.XX ±0.10
SHEET: 01/01					X° ±1°	