


MULTILAYER DIRECTIONAL COUPLER SPECIFICATION

P/N: **HHM2910E1**

[MECHANICAL DIMENSIONS]

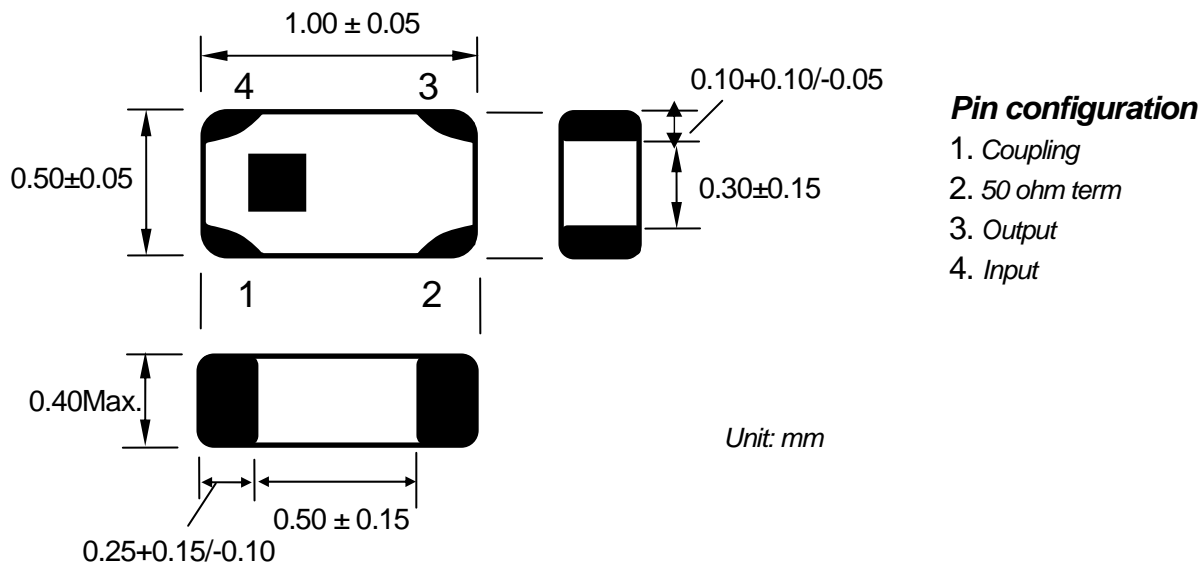

ELECTRICAL CHARACTERISTICS

Frequency	Coupling	Ins.Loss(1)	Ins.Loss(2)	Isolation	VSWR
1710-1755	21.2+/-1.0	0.22 Max.	0.25 Max.	34 Min.	1.4 Max.
1750-1980	20.5+/-1.0	0.22 Max.	0.25 Max.	34 Min.	1.4 Max.
1980-2025	19.9+/-1.0	0.22 Max.	0.25 Max.	34 Min.	1.4 Max.
MHz	dB	dB	dB	dB	

Ins. Loss(1):at 25 degree

Ins.Loss(2):at Operating Temperature

TEMPERATURE RANGE

Storage Temperature : -40 ~ +85 °C


Operating Temperature : -40 ~ +85 °C

[FREQUENCY CHARACTERISTICS]

HHM2910E1


Sample data

Coupling

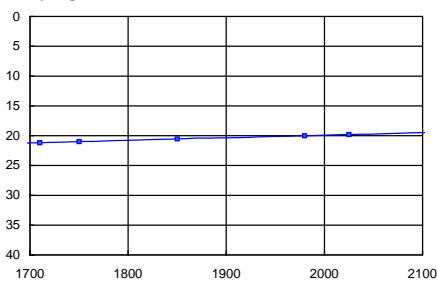

1710 MHz	21.2 dB
1750 MHz	21.0 dB
1850 MHz	20.6 dB
1980 MHz	20.0 dB
2025 MHz	19.8 dB


Isolation&Directivity

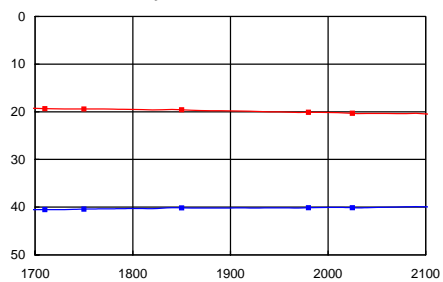

1710 MHz	40.5 dB
1750 MHz	40.4 dB
1850 MHz	40.2 dB
1980 MHz	40.1 dB
2025 MHz	40.1 dB


1710 MHz	19.3 dB
1750 MHz	19.4 dB
1850 MHz	19.6 dB
1980 MHz	20.1 dB
2025 MHz	20.3 dB

Insertion Loss

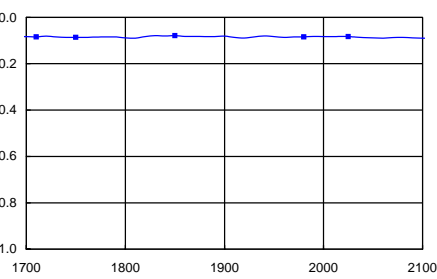

1710 MHz	0.08 dB
1750 MHz	0.09 dB
1850 MHz	0.08 dB
1980 MHz	0.08 dB
2025 MHz	0.08 dB

VSWR

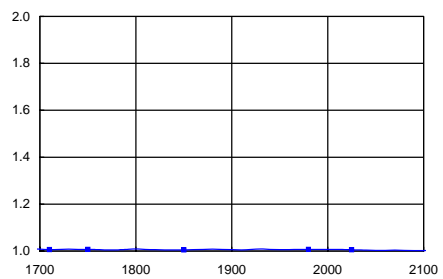

1710 MHz	1.01
1750 MHz	1.01
1850 MHz	1.01
1980 MHz	1.01
2025 MHz	1.01

[RECOMMENDED LANDPATTERN]

