

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








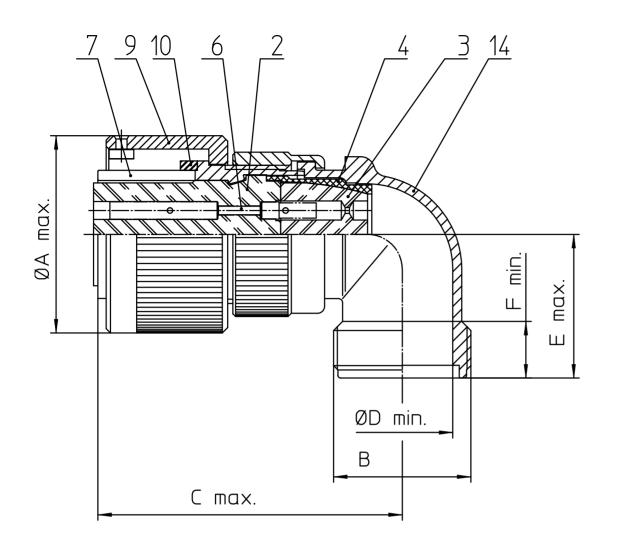





NO.	MASSE / DIMENSIO
А	43.1
В	1 3/16-18UNEF-2A
С	61
D	24.6
E	30
F	9.4

NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
11	SCHIRMKRANZ/SHIELDING BRAID
14	F-ENDGEHÄUSE / F-ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to chang Drawings illustrate normal insulator positioning

Material Specification:			
Shell Material:	Aluminium alloy		
Shell Plating:	Olive drab chromate over cadmium (conductive)		
Insulator Material: CR-Elastomere			
Contact Material:	Copper alloy		
Contact Plating:	Hard silver		

all dimensions are in mm

CUSTOMER



description CA3108F22-14S-B-15 Plug, 90° shielded

Shielded with endbell for shielded braids & heat shrinkable boots AWG Crimp / Socket / Layout: 22-14

ITT CANNON GmbH D - 71384 Weinstadt/Germany © All rights reserved. Reproduction or issue to third in any form uholever is only permitted with written outhorization of ITT Connorm 1/1/1 1/188 30. Jul 18

