Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

~~THIS DRAWING IS UNPUBLISHED.~~ RELEASED FOR PUBLICATION ,1996.
© COPYRIGHT 1996 BY AMP INCORPORATED.ALL RIGHTS RESERVED.

LOC	DIST
J	–

REVISIONS 変更

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
	0	DRAWN	FJ00-1684-99	30SEP99	YF	KO

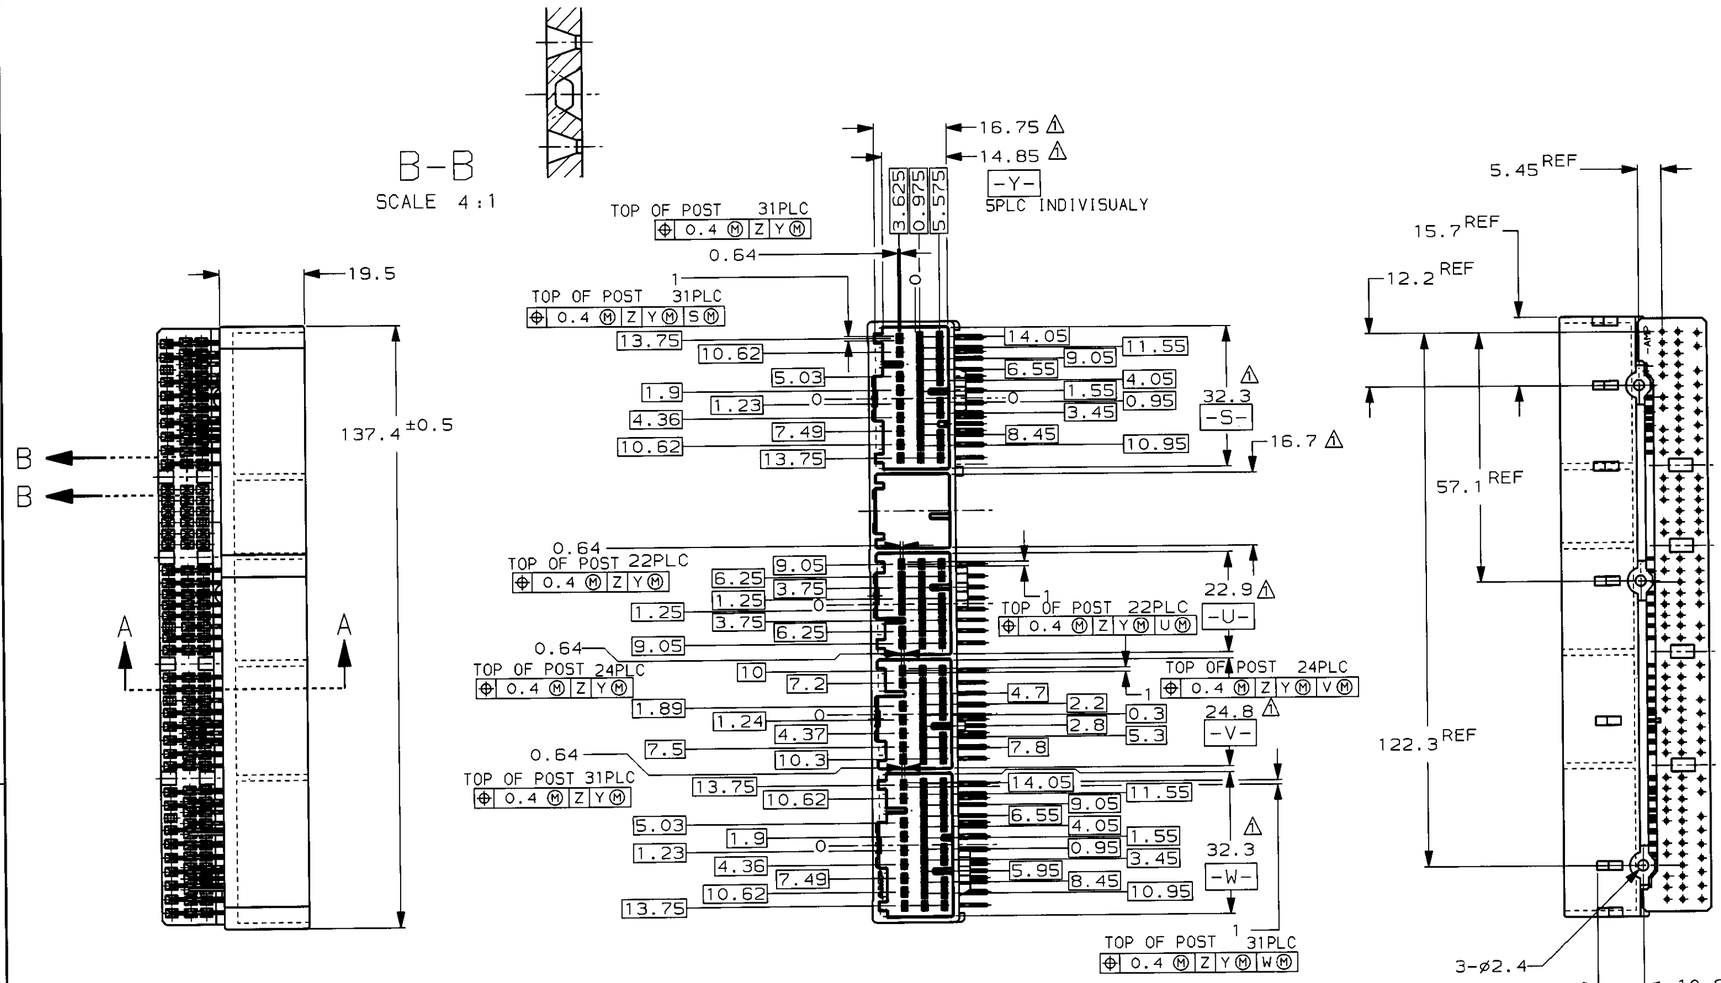

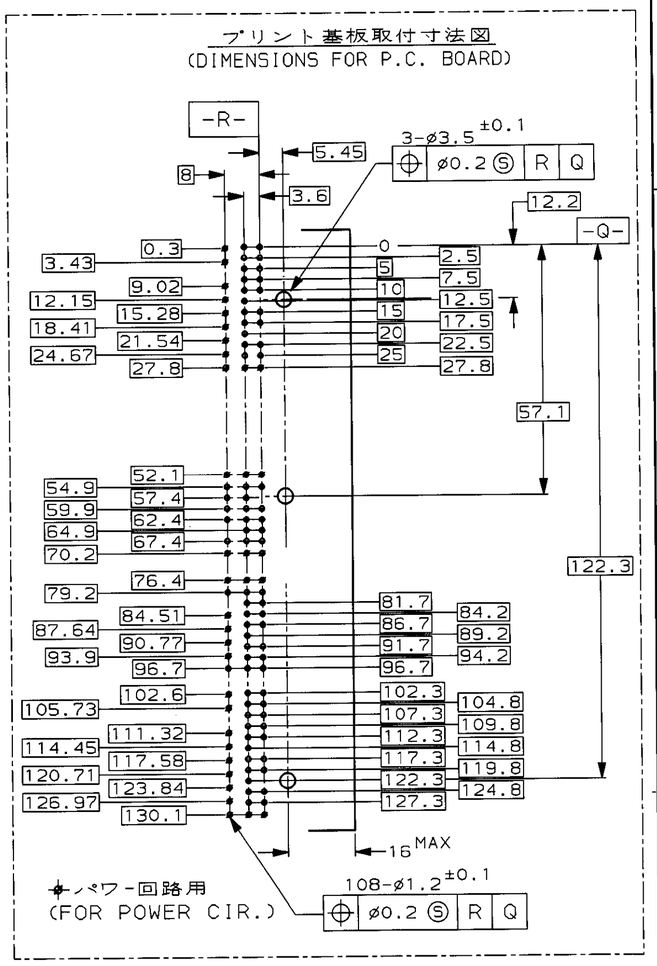

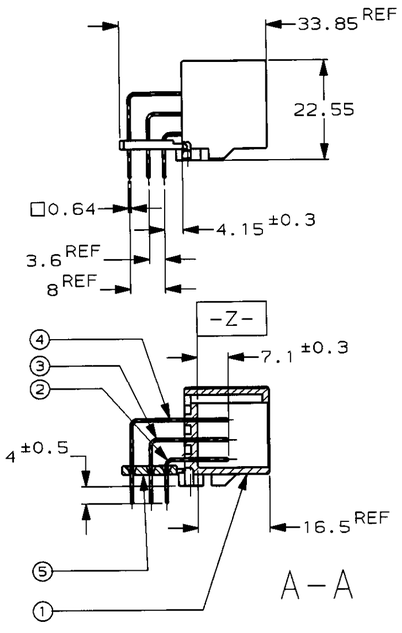

1. 乙面より7.5mmの位置で測定
2. パワー回路(35極);FIG 1 参照
3. 回路番号;FIG 1 参照
4. 嵌合相手ハウジング型番
   22P; 353028
   24P; 353029, 31P; 1318682 ,353826
5. 推奨取付ねじ:JIS B1115、B1122
   タッピングねじ、なべ2種、呼び径3、長さ6以下
6. ねじ締付トルク:0.392N・m MAX
7. 取扱説明書 411-5931

1. MEASURED AT THE SECTION 7.5mm FROM Z.
2. POWER CIRCUITS (35) ; SEE FIG 1
3. CIRCUIT NUMBERS ; SEE FIG 1
4. PART NO OF PLUG HOUSINGS TO BE MATED
   22P; 353028 ,24P; 353029
   31P; 1318682 ,353826
5. RECOMMENDED SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3DIA X 6LEN(MAX) (JIS B1115, B1122).
6. FASTENING TORQUE FOR SCREW: 0.392N・m MAX.
7. INSTRUCTION SHEET 411-5931

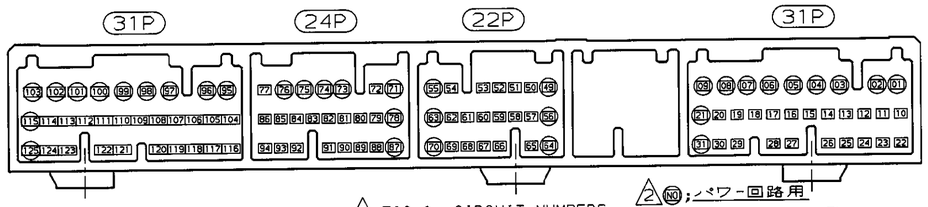

3 FIG 1 CIRCUIT NUMBERS

2 NO;パワー回路用
(FOR POWER CIRCUIT)

FINISH/COLOR	MATERIAL	NAME	QTY	ITEM NO
NATURAL	PBT	TINE PLATE	1	⑤
PRE-TIN	COPPER ALLOY	TAB CONTACT(L)	32	④
PRE-TIN	COPPER ALLOY	TAB CONTACT(M)	41	③
PRE-TIN	COPPER ALLOY	TAB CONTACT(S)	35	②
NATURAL	PBT	CAP HOUSING	1	①

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
一般公差 10未満 ±0.2, 30未満 ≥10 ±0.25, 100未満 ≥30 ±0.3, ANGLE ±3°

MATERIAL 材料: SEE TABLE
FINISH 仕上: SEE TABLE

DWN Y.FUJIWALA 29SEP99
CHK K.ODA 30SEP99
APVD K.ODA 30SEP99
PRODUCT SPEC 製品規格: 108-5673
APPLICATION SPEC 取付適用規格:
WEIGHT: 39.8g

AMP 日本エー・エム・ピー株式会社 Kawasaki, Japan

NAME 名称: 040 Ⅲ HIGH DENSITY CONNECTOR 108POS CAP HOUSING ASSY

SIZE A2 | CAGE CODE 00779 | DRAWING NO 番号 C-1318613 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 尺度 1-1 | SHEET 1 OF 1 | REV 0

参考図面

AMP 1471-9 REV 10/93

/kec/automotive/en32_automotive/u.c98-0183/u.customer/s.c-1318613