



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



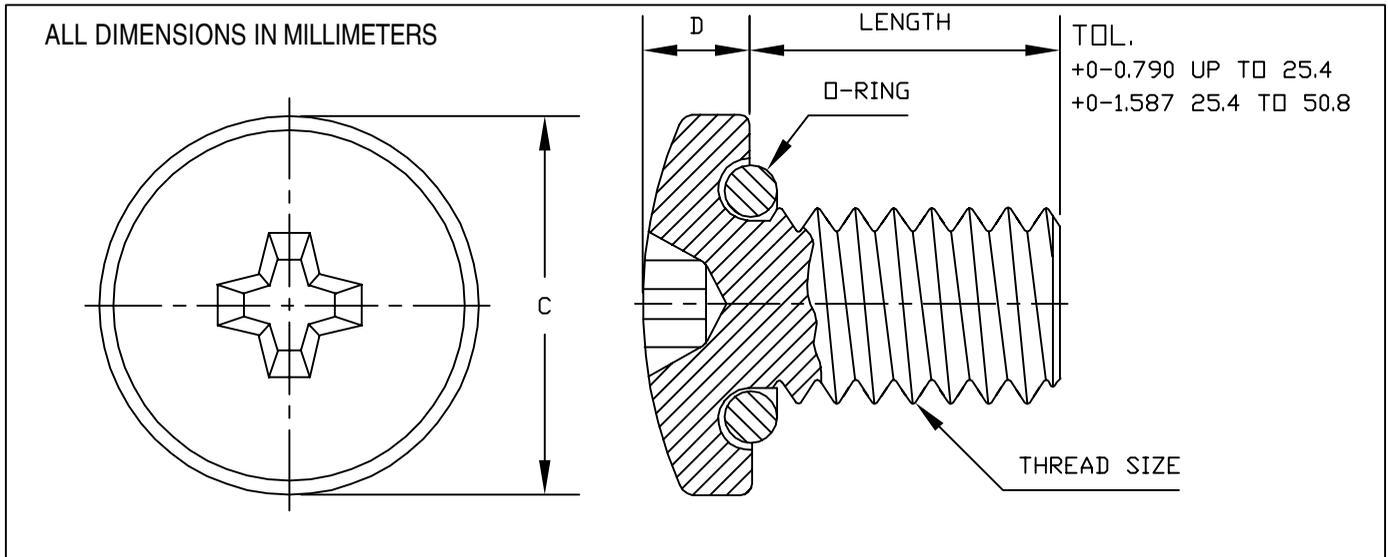

THREAD SIZE	C max	D max	Head Driver Size	RECOM. CLEAR. HOLE		LENGTH
				MIN.	MAX.	
M 2x0.4	4.830	1.600	#1	2.310	2.410	4 to 12 mm
M 2.5x0.45	5.460	2.100	#1	2.670	2.840	4 to 12 mm
M 3x0.5	6.700	2.400	#2	3.550	3.650	4 to 40 mm
M 3.5x0.6	8.100	2.600	#2	3.890	3.990	4 to 40 mm
M 4x0.7	8.690	3.050	#2	4.390	4.540	4 to 40 mm
M 5x0.8	9.900	3.700	#2	5.560	5.660	6 to 40 mm
M 6x1	12.580	4.600	#3	6.730	6.830	6 to 50 mm

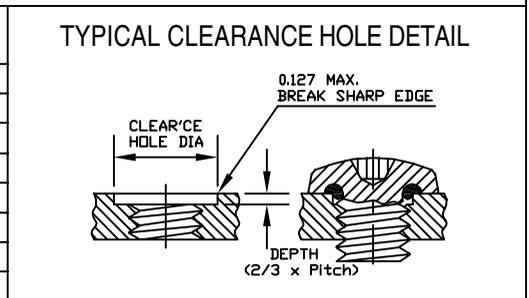

STANDARD SPECIFICATIONS & COMMON OPTIONS (HOW TO ORDER)
 STD. SCREW MATERIAL: TYPE 18/8 STAINLESS STEEL PER DFARS (OTHER MATERIALS AVAILABLE)
 STD. SCREW FINISH: NATURAL (PASSIVATED PER MIL-STD-171 UNLESS OTHERWISE SPECIFIED)
 STD. O-RING MATERIAL: SILICONE RUBBER (SEE TABLE FOR O-RING OPTIONS)

SAMPLE CATALOG NO.		RM3X12-2701-BLKOX
SCREW TYPE	RM	PAN HEAD WITH CROSS RECESS
THREAD	3	ENTER BASIC THREAD SIZE
	X	
LENGTH	12	ENTER LENGTH
O-RING SUFFIX	-2701	ENTER FROM TABLE
OPTIONS	-BLKOX	ENTER FROM TABLE

AVAILABLE O-RING MATERIALS		
Compound Suffix	Material	Service Temp.
-2701	Silicone Rubber	-150°F to 500°F -101°C to 260°C
-2615	Fluoro-Silicone Rubber	-78°F to 450°F -61°C to 232°C
-5701	Viton® A	-20°F to 400°F -29°C to 204°C
-4601	Buna N (NBR)	-65°F to 250°F -54°C to 121°C
-3701	Neoprene (EPR)	-65°F to 300°F -54°C to 149°C
-7601	Ethylene Propylene (EPDM)	-65°F to 300°F -54°C to 149°C

COMMON OPTIONS	
SUFFIX	DESCRIPTION
-BLKOX	BLACK OXIDE PER MIL-C-13924A, CLASS 2
-NY	LOCKING NYLON PELLET
-LY	LOCKING NYLON STRIP
-TP	LOCKING NYLON STD. PATCH
-HTP	HIGH TEMP. LOCKING NYLON PATCH

K	CHANGED Cmax of M2 from 4.240 to 4.830	S. GOK	09.09.10
J	ADDED "PER DFARS" FOR THE SCREW MATERIAL	S. GOK	07.02.09
I	NEW DRAWING FORMAT	S. GOK	01.21.09
H	CHANGED HEAD DIA. and HEAD HEIGHT of ALL THREAD	S. GOK	12.12.08
REV.	DESCRIPTION	DATE	

MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: SEELSKREW®, METRIC PAN HEAD	ENG.	
		DWN. J. PAULUMBO	12.16.58
MAT'L: AS NOTED	APM-HEXSEAL CORPORATION	CHKD.	
FINISH: AS NOTED		SCALE	DWG. NO. RM-0000-00-00

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
 THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.