



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PNP Power Silicon Transistor

## 2N3740 & 2N3741



### Features

- Available in JAN, JANTX, JANTXV and JANS per MIL-PRF-19500/441
- TO-66 (TO-213AA) Package



### Maximum Ratings

Ratings	Symbol	2N3740	2N3741	Units
Collector - Emitter Voltage	$V_{CEO}$	60	80	Vdc
Collector - Base Voltage	$V_{CBO}$	60	80	Vdc
Emitter - Base Voltage	$V_{EBO}$	7.0		Vdc
Base Current	$I_B$	2.0		Adc
Collector Current	$I_C$	4.0		Adc
Total Power Dissipation @ $T_A = +25\text{ }^\circ\text{C}$ @ $T_C = +100\text{ }^\circ\text{C}$	$P_T$	3 14		W W
Operating & Storage Temperature Range	$T_{op}, T_{stg}$	-65 to +200		$^\circ\text{C}$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	7.0		$^\circ\text{C/W}$

### Electrical Characteristics ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

OFF Characteristics	Symbol	Mimimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 100\text{ mA}$ 2N3740 2N3741	$V_{(BR)CEO}$	60 80	---	Vdc
Collector - Emitter Cutoff Current $V_{CE} = 40\text{ Vdc}$ $V_{CE} = 60\text{ Vdc}$ 2N3740 2N3741	$I_{CEO}$	---	10 10	$\mu\text{Adc}$
Collector - Emitter Cutoff Current $V_{CE} = 60\text{ Vdc}, V_{BE} = 1.5\text{ Vdc}$ $V_{CE} = 80\text{ Vdc}, V_{BE} = 1.5\text{ Vdc}$ 2N3740 2N3741	$I_{CEX}$	---	300 300	nAdc
Collector - Base Cutoff Current $V_{CB} = 60\text{ Vdc}$ $V_{CB} = 80\text{ Vdc}$ 2N3740 2N3741	$I_{CBO}$	---	100 100	nAdc
Emitter - Base Cutoff Current $V_{EB} = 7.0\text{ Vdc}$	$I_{EBO}$	---	100	nAdc




**Electrical Characteristics -con't**

<b>ON Characteristics (1)</b>				
	Symbol	Minimum	Maximum	Unit
Forward Current Transfer Ratio $I_C = 100 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 250 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 500 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 1.0 \text{ Adc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 4.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$	$H_{FE}$	40 30 20 10 3	120	
Collector - Emitter Saturation Voltage $I_C = 250 \text{ mAdc}, I_B = 25 \text{ mAdc}$ $I_C = 1.0 \text{ Adc}, I_B = 1.25 \text{ mA}$	$V_{CE(sat)}$	--- ---	0.4 0.6	Vdc
Base - Emitter Voltage $I_C = 250 \text{ mAdc}, V_{CE} = 1 \text{ Vdc}$	$V_{BE(on)}$	---	1.0	Vdc
<b>DYNAMIC Characteristics</b>				
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 100 \text{ mAdc}, V_{CE} = 10.0 \text{ Vdc}, f = 5.0 \text{ MHz}$	$ h_{fe} $	1	12	
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 50 \text{ mAdc}, V_{CE} = 10.0 \text{ Vdc}, f = 1.0 \text{ kHz}$	$h_{fe}$	25	250	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	$C_{obo}$	---	100	pF
<b>SWITCHING Characteristics</b>				
Turn-On Time $V_{CC} = 30 \text{ Vdc}, I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$	$t_{on}$	---	400	$\mu\text{s}$
Turn-off Time $V_{CC} = 30 \text{ Vdc}, I_C = 1.0 \text{ Adc}, I_{B1} = -I_{B2} = 0.1 \text{ Adc}$	$t_{off}$	---	1.0	$\mu\text{s}$
<b>SAFE OPERATING AREA</b>				
<b>DC Tests:</b>	$T_C = +25 \text{ }^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$			
<b>Test 1:</b>	$V_{CE} = 6.25 \text{ Vdc}, I_C = 4.0 \text{ Adc}$			
<b>Test 2:</b>	$V_{CE} = 20 \text{ Vdc}, I_C = 1.25 \text{ Adc}$			
<b>Test 3:</b>	$V_{CE} = 50 \text{ Vdc}, I_C = 150 \text{ mAdc}$	2N3740		
	$V_{CE} = 65 \text{ Vdc}, I_C = 150 \text{ mAdc}$	2N3741		

(1) Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

Outline Drawing

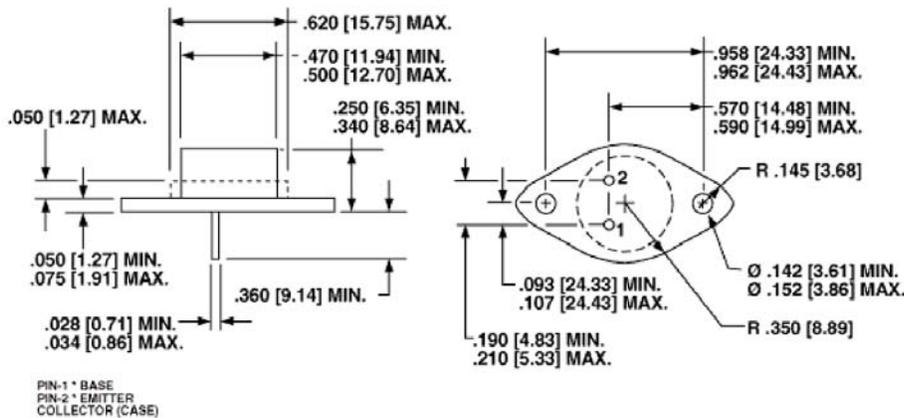

NOTE: Dimensions in Inches [mm]

**Aeroflex / Metelics, Inc.**

975 Stewart Drive,  
Sunnyvale, CA 94085  
Tel: (408) 737-8181  
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

**Hi-Rel Components**

9 Hampshire Street,  
Lawrence, MA 01840  
Tel: (603) 641-3800  
Fax: (978) 683-3264

[www.aeroflex.com/metelics-hirelcomponents](http://www.aeroflex.com/metelics-hirelcomponents)

54 Grenier Field Road,  
Londonderry, NH 03053  
Tel: (603) 641-3800  
Fax: (603)-641-3500

ISO 9001: 2008 certified companies

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@aeroflex.com](mailto:metelics-sales@aeroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.