



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**KEMET Part Number: PME264NE5680MR30**  
(P264EJ683M660A)

PME264/P264, Film, Metallized Paper, Safety, 0.068 uF, 20%, 660 VAC (X2), 1500 VDC, 85C, Lead Spacing = 25.4mm

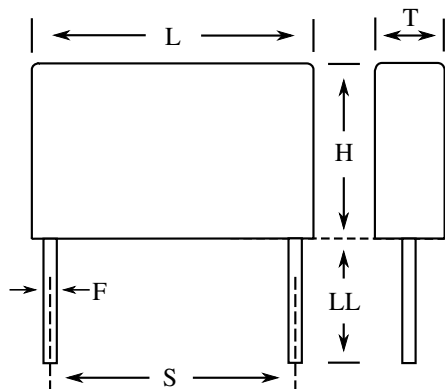

**General Information**

Supplier:	KEMET
Series:	PME264/P264
Dielectric:	Metallized Paper
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL
Construction:	Molded

**Dimensions**

L	30.5mm MAX
H	19mm MAX
T	12.1mm MAX
S	25.4mm +/-0.5mm
LL	30mm +5mm
F	1mm NOM

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	100

**Specifications**

Capacitance:	0.068 uF
Capacitance Tolerance:	20%
Voltage AC:	660 VAC (X2)
Voltage DC:	1500 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Dissipation Factor:	1.3% 1kHz
Insulation Resistance:	12 GOhms
Max dV/dt:	1000 V/us
Safety Class:	X2