

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### SPECIFICATION FOR APPROVAL

CUSTOMER

:

DESCRIPTION

DC BRUSHLESS FAN

**DIMENSIONS** 

40x40x10 mm

MODEL

**KD1204PFS2** 

P/N

H

**APPROVED NO** 

.

**APPROVED BY** 

•

(AUTHORIZED)

牙發那 1.11

				13 7		SPEC.NO	D401449
	Chiahui		, 1			ISSUE DATE	11.08.2000
DAWN.	onianii 11/8	СНКД.	Cadyte	APPD.	01111/1/	EDITION	0
	11/0.				(alli 1)	REVISE DATE	
		-				E.SPEC	ED40234

建準電機工業股份有限公司

SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.

12FL., 120 CHUNG CHENG 1ST RD.,

TEL:886-7-7163069(41 LINES)

KAOHSIUNG, TAIWAN, R. O. C. -

FAX:886-7-7163086~89

#### DC BRUSHLESS FAN

**MODEL: KD1204PFS2** 

P/N : H

### **CHARACTERISTICS**

1. Motor Design

Patented single-coil DC brushless 4 poles motor

Design.

2. Insulation Resistance

More than 500M ohm between internal stator and

lead wire(+) measured by DC 500V.

3. Dielectric Strength

: Applied AC 500V for one minute or AC 600V for

2 seconds between housing and lead wire(+)

4. Noise Level

: Measured in an semi-anechoic chamber

with background noise level below 15

dB(A). The fan is running in free air with

Microphone at a distance of one meter

from the fan intake.

5. Input power, Current & Speed

Measured after continuous 30 minutes

Operation at rated voltage in clean air

at ambient temperature of 25 degrees C.

6. Tolerances

±15% on rated power and current.

7. Motor Protection

: Locked rotor protected.

8. Air Performance

Measured by a double chamber. The value

are recorded when the fan speed is stabilized

at rated voltage.

建準電機工業股份有限公司	
SUNONWEALTH ELECTRIC	
MACHINE INDUSTRY CO., LTI	D.

SPEC.NO	D401449	REVISE DATE
ISSUE DATE	11. 08. 2000	EDITION 0
PAGE	2 OF 6	500

### **SPECIFICATIONS**

**MODEL: KD1204PFS2** 

P/N : H

1-1. Rated Voltage : 12 VDC

1-2. Operating Voltage Range : 6-13.8 VDC

1-3. Starting Voltage : 6 VDC

1-4. Rated Speed : 5500 RPM ± 1000 RPM

1-5. Air Delivery : 4.9 CFM

1-6. Static Pressure : 0.11 Inch-H<sub>2</sub>O

1-7. Rated Current : 0.09 AMP

1-8. Rated Power : 1.1 WATTS

1-9. Noise Level : 25 dB(A)

1-10. Direction of Rotation : Counter-clockwise viewed front fan blade

1-11. Operating Temperature : -10 to +70 Deg.C

1-12. Storage Temperature : -40 to +70 Deg.C

1-13. Bearing System : Lubricated sleeve bearing system

1-14. Weight : 15.3 g

1-15. Safety : UL/CUR/TUV/CE Approvals

1-16. Vibration : Vibration of acceleration 1.5G and Frequency 5~50~5Hz is applied in the

3 directions(X,Y,Z) for 30 minutes, each

Direction at the cycle of 1 minute.


建準電機工業股份有限公司	SPEC.NO	D401449	REVISE DATE
SUNONWEALTH ELECTRIC	ISSUE DATE	11. 08. 2000	EDITION 0
MACHINE INDUSTRY CO., LTD.	PAGE	3 OF 6	设行主

MODEL: KD1204PFS2

**P/N** : **H** 

# PERFORMANCE CURVES

STATIC PRESSURE

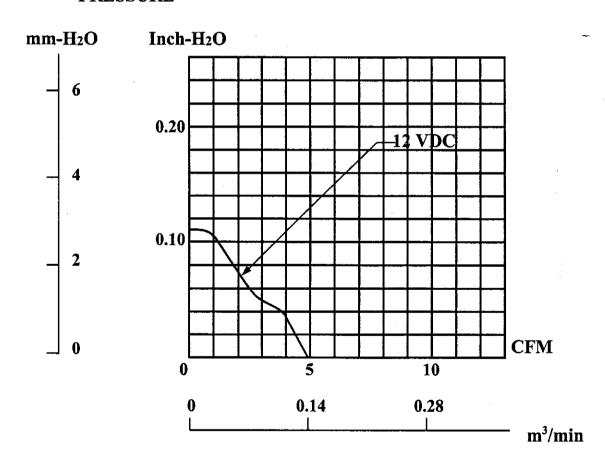

建準電機工業股份有限公司	SPEC.NO	D401449	REVISE DATE	5/3 301
SUNONWEALTH ELECTRIC	ISSUE DATE	11. 08. 2000	EDITION	0
MACHINE INDUSTRY CO., LTD.	PAGE	4 OF 6		行童人

## **MATERIAL**


2-1. Frame : Thermoplastic PBT of UL 94V-0

2-2. Impeller : Thermoplastic PBT of UL 94V-0

2-3. Bobbin : Thermoplastic PBT of UL 94V-0

2-4. Lead Wire : UL2468,26AWG,+RED;-BLACK

## **DIMENSIONS**

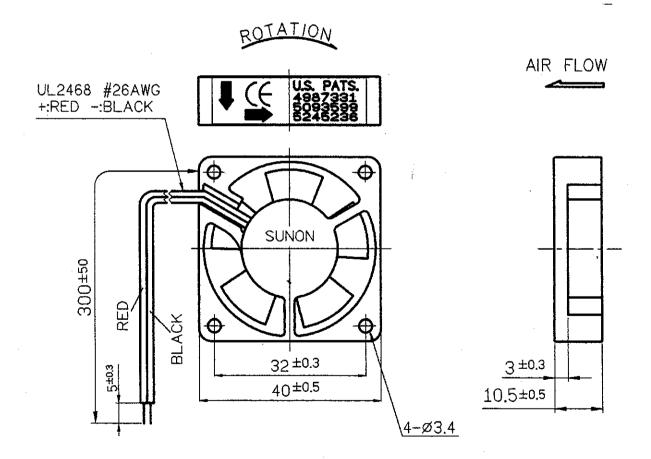

Air Flow Direction: Label side.

TIMITURE	•	
UNITS	•	mn
	7	-68

			ATT.	
建準電機工業股份有限公司	SPEC.NO	D401449	REVISE DATE	學者到
SUNONWEALTH ELECTRIC	ISSUE DATE	11. 08. 2000	EDITION	011
MACHINE INDUSTRY CO., LTD.	PAGE	5 OF 6	3.4	*

# Notes |-

- 1. SUNON will not guarantee the products if the application of our products is exceeded the limitation which is specified on this specification.
- 2. In case of change of the specification specified on this document, a written notice is requested in advance.
- 3. Please do not touch the impeller with pressure and never bring the fan with lead wire. The bearings and lead wire may be damaged.
- 4. No guarantee on the products against the safety problem or failure caused by powder dust, drop of water or insect.
- 5. If there is any data or related documentation different from this data sheet, this data sheet is the principal reference.
- 6. For the purpose of MIS, please indicate SPEC No. on every order.
- 7. In case of the fan has no polarity protection function, wires with same color (electrode) must be connected together during the assembly. (i.e. red + red, black + black) or the fan will be damaged immediately.
- 8. Please do not use the fan in the environment of corrosive gas or liquid or any detrimental gas.
- 9. Please do not store the fan in the environment of high / low temperature, high humidity or any detrimental gas. Please store the fan within 6 months, every 6 months, there shall be a linkage of electric current to the fan, even though the fan is stored in room temperature.
- 10. While the fan is in operation, please do not lock the fan intentionally for a long period of time, since the continuous stoppage will result in over-heat and damage of the fan.
- 11. During the installation of the fan, please pay substantial attention to possible noise cause by resonance vibration and vibration.
- 12. During the testing of the fan, please be sure to use finger guard to insure safety.
- 13.Unless otherwise specified, if there is any doubt in the judgement, the temperature and relative humidity range of environment will be take in according to the standard test condition as 25°C and 65%.

建準電機工業股份有限公司	SPEC.NO		REVISE DATE
SUNONWEALTH ELECTRIC	ISSUE DATE	11. 08. 2000	EDITION 0世界多
MACHINE INDUSTRY CO., LTD.	PAGE	6 OF 6	1,11