



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




1. MATERIALS AND FINISHES:
SHELL, HOUSING, BARREL, NUT & RETAINER RING - BRASS (ASTM-B16 H02, C36000), NICKEL PLATING (.000100 MIN THICK)
CONTACT PIN - BRASS (ASTM-B16 H02, C36000), GOLD PLATING (.000003 MIN THICK) OVER NICKEL (.000100 MIN THICK)
INSULATOR & RING - DELRIN, NATURAL
WASHER - BRASS (QQ-B-613), NICKEL PLATING (.000100 MIN THICK)
FERRULE - COPPER, NICKEL PLATING (.000100 MIN THICK)
GASKET - SILICONE RUBBER, COLOR RED

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 11 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

3. MECHANICAL:
A. TEMPERATURE RANGE: -40°C TO $+85^{\circ}\text{C}$

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 31-5849-RFX, AND DATE CODE"

31-5849-RFX		REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR	
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	12/20/05	45824	CPM	

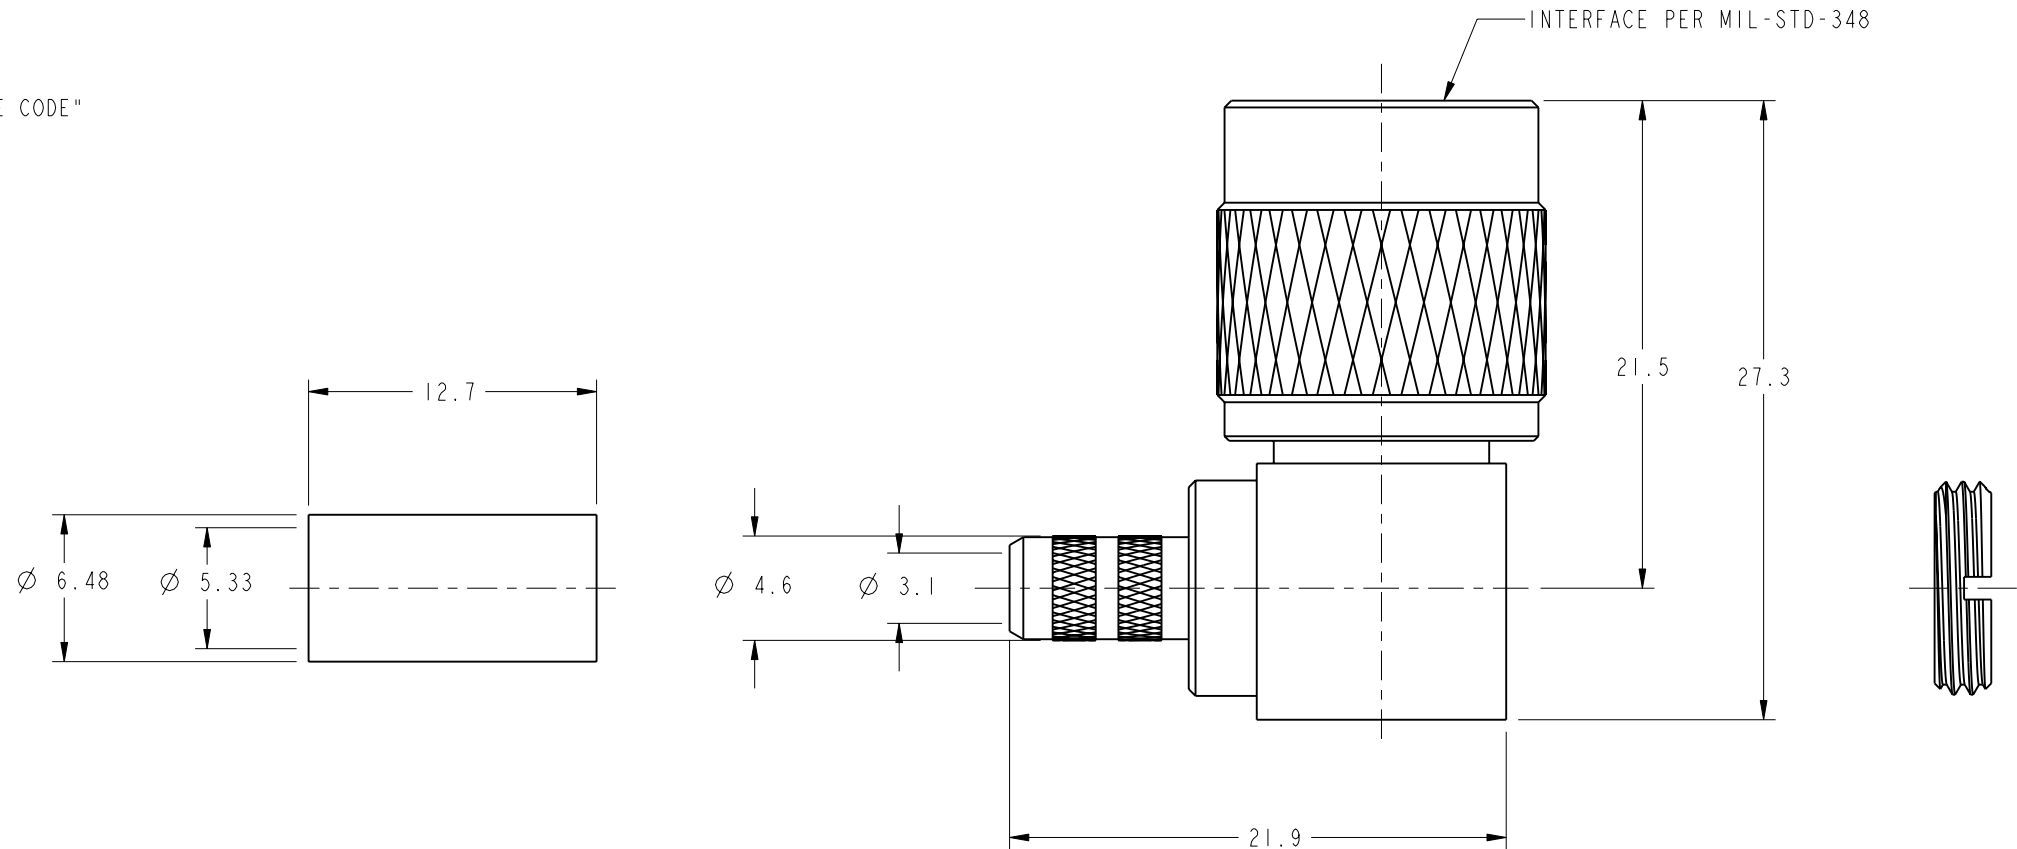

Technical drawing of a mechanical part, likely a shaft or rod, showing dimensions in millimeters. The drawing includes a cross-section of a threaded section. The dimensions are:

- 4.1: Distance from the left end to the start of the threaded section.
- 5.6: Distance from the start of the threaded section to the end of the part.
- 8.3: Total length of the part.

RECOMMENDED CABLE
STRIPPING DIMENSIONS
SCALE 3.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM (INCHES) AND TOLERANCES ARE: 0.5 - 6mm ±0.2mm 6 - 30mm ±0.4mm 30 - 120mm ± 0.6mm	MATERIAL C. McGRATH	DRAWN C. McGRATH	DATE 22-Nov-05	TITLE TNC R/A CRIMP PLUG FOR RG-58/U, 58C/U CABLE				Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810			
		ENGINEER O. BARTHELMES	DATE 22-Nov-05								
		REFERENCE	APPROVED O. BARTHELMES					DATE 12/20/05			
	NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CAD FILE I:\TNC\31-5849-RFX			CODE ID 74868	DWG SIZE B	DRAWING NO. 31-5849-RFX			REV A	