

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









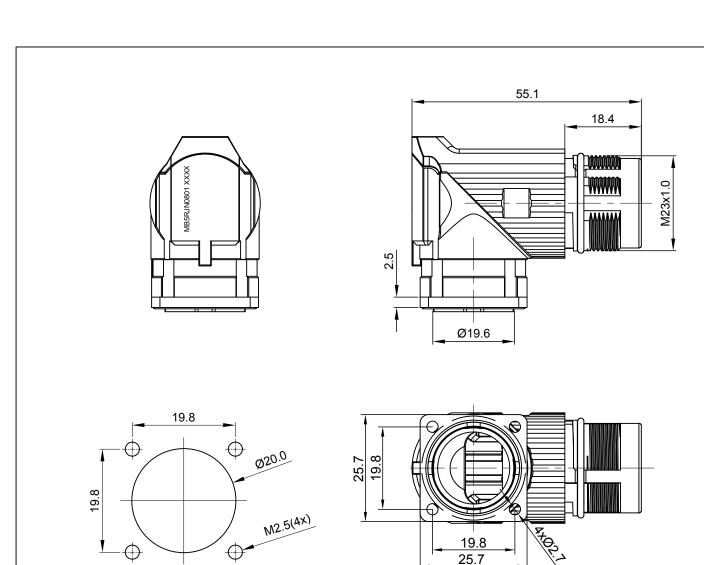

MOUNTING HOLE





NOTES: LINI ESS	OTHERWISE SPECIFIED

1. MATERIAL:

REV

A1

ECO

INSULATION INSERT:PA66,UL94 V0 SEAL: VITON HOUSING BODY: ZINC DIE CAST, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD PLATED

2. SPECIFICATIONS:

2.1 CURRENT RATING: SIGNAL: 10 AMPS POWER: 30AMPS

2.2 VOLTAGE RATING: SIGNAL: 250V AC/DC

POWER: 630V AC/DC

REVISIONS

DATE

Jan.12.2018 White

BY

APPR

Tommy

DESCRIPTION

FIRST RELEASE

2.3 OPERATING TEMPERATURE: -20°C TO +130°C

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ SIGNAL: 2500VOLTS AC.

POWER: 6000 VOLTS AC.


2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)

2.6 DEGREE OF POLLUTION: 3 PER UL840 2.7 OVERVOLTAGE CATEGORY: III PER UL840

2.8 MATING CYCLE DURABILITY: >500 CYCLES

2.9 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

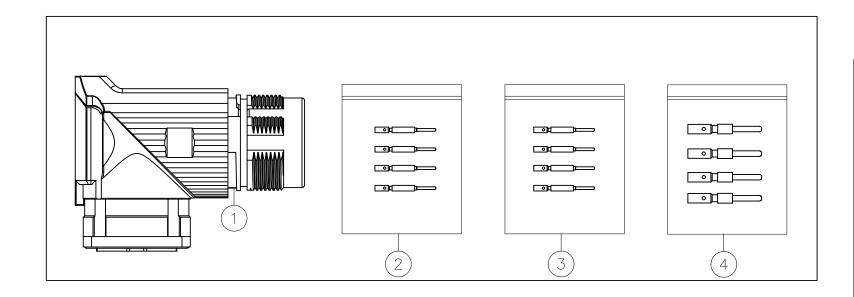

							_		
4	SC000)262	COI	CONTACT, PIN, Ø2.0mm,CRIMP 14~18AWG					
4	SC000	386	COI	CONTACT, PIN, Ø1.0mm,CRIMP 24~28AWG					
4	SC000)261	COI	CONTACT, PIN, Ø1.0mm,CRIMP 18~22AWG					
1	MB7R	JN0801	СО	CONNECTOR					
QUANTITY	PART N	NUMBER		DESCRIPTION					
MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED SIGNATURE			ES D	ATE	Amphonol				
All dimensions are in metric(mm). Tolerances are as follows: DRAWN: DRAWN: White			Jan.1	2.2018	Amphenol				

1 PL DEC ±0.30 Fractions ±1/64	11111C 0011: 12:20 10		<u> </u>				
2 PL DEC ±0.15 Angles ±1° Angles ±1°	CHECKED: Tod	Jan.12.2018	Sine Systems - www.amphenol-sine.com				
3) Note reference = X	ENGINEER:		44724 Morley Drive				
	APPROVAL: T	Jan 40 0040	Clinton Township, MI 48036				
MATERIAL SPECIFICATIONS:	Tommy	Jan.12.2018					
	CUSTOMER:		KIT,M23B,REC.,RA,8POS(4+4),FLANGE MOUNT				
	THIS DRAWING IS SUPPLIED FO		, , ,				
PROCESS SPECIFICATIONS:	INFORMATION ONLY, DESIGN F SPECIFICATIONS AND PERFOR	RMANCE DATA	SIZE TYPE	DWG NO:		REVISION	
	SHOWN HEREON ARE THE PROTOCOLOGY THE AMPHENOL CORPORATIO OF REPRODUCTION ARE IMPLI DIMENSIONS ARE SUBJECT TO	N. NO RIGHTS IED. ALL NORMAL		- MB7RJN08	01-KIT	A1	
NEXT ASS'Y: MANUFACTURING VARIATIONS.		SCALE: NONF		SHEET 1	of 1		

SCALE: NONE SHEET 1 OF 1