



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



KEMET Part Number: M3253508E2Z335KZMB
(C2220K335K3RML)

SMD MIL X7R PRF32535, Ceramic, Military/High Reliability, 3.3 uF, 10%, 25 VDC, X7R, SMD, Conformal, Military, Low ESR, MIL-PRF-32535, N/A, 2220

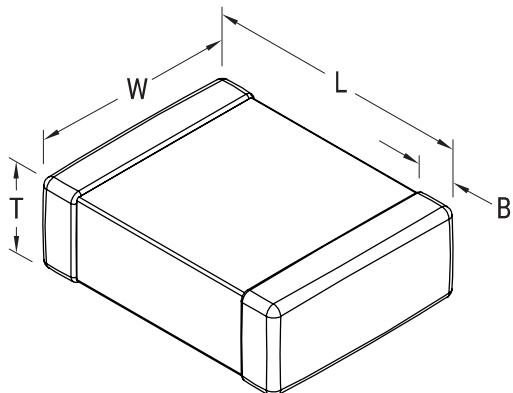


Dimensions

L	5.69mm +/-0.41mm (0.224 in +/-0.016 in)
W	5mm +/-0.41mm (0.197 in +/-0.016 in)
T	2.79mm MAX (0.11 in MAX)
B	0.64mm +/-0.46mm (0.025 in +/-0.018 in)

Packaging Specifications

Weight:	430 mg
Packaging:	Waffle
Packaging Quantity:	80

General Information

Supplier:	KEMET
Series:	SMD MIL X7R PRF32535
Style:	SMD Chip
Description:	SMD, Conformal, Military, Low ESR, MIL-PRF-32535
RoHS:	No
Prop 65:	 WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Solder Plated
Failure Rate:	N/A
Qualifications:	MIL-PRF-32535
Notes:	2mm Pitch T&R packaging option will double quantity. Only for 0603 Chip Size
Chip Size:	2220

Specifications

Capacitance:	3.3 uF
Capacitance Tolerance:	10%
Voltage DC:	25 VDC
Dielectric Withstanding Voltage:	62.5 V
Temperature Range:	-55/+125C
Temperature Coefficient:	X7R
Dissipation Factor:	3.50% 1kHz 25C
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	300 MOhms