

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











#### ■ Features :

- Universal AC input / Full range (up to 295VAC)
- Built-in active PFC function
- High efficiency up to 91%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP65 / IP67 design for indoor or outdoor installations
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- 3 years warranty



CLG-150-12 A

Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable.
- C : Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.

#### **SPECIFICATION**


MODEL		CLG-150-12	CLG-150-15	CLG-150-20	CLG-150-24	CLG-150-30	CLG-150-36	CLG-150-48		
ОИТРИТ	DC VOLTAGE	12V	15V	20V	24V	30V	36V	48V		
	CONSTANT CURRENT REGION Note.4	9 ~12V	11.25 ~ 15V	15 ~ 20V	18 ~ 24V	22.5 ~ 30V	27 ~ 36V	36 ~ 48V		
	RATED CURRENT	11A	9.5A	7.5A	6.3A	5A	4.2A	3.2A		
	RATED POWER	132W	142.5W	150W	151.2W	150W	151.2W	153.6W		
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p		
	VOLTAGE ADJ. RANGE Note.6	9 ~ 13V	13 ~ 17V	17 ~ 22V	22 ~ 27V	26 ~ 32V	31 ~ 41V	40 ~ 56V		
	CURRENT ADJ. RANGE	Can be adjusted by internal potentiometer A type and C type only								
		5.5 ~ 11A	4.75 ~ 9.5A	3.75 ~ 7.5A	3.15 ~ 6.3A	2.5 ~ 5A	2.1 ~ 4.2A	1.6 ~ 3.2A		
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME	3000ms, 80ms/115VAC 500ms, 80ms/230VAC at full load								
	HOLD UP TIME (Typ.)	50ms / 230VAC 16ms / 115VAC at full load								
		90 ~ 295VAC								
INPUT	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)								
	TOTAL HARMONIC DISTORTION	THD< 20% when output loading≧75% at 115VAC/230VAC input and output loading≧75% at 277VAC input								
	EFFICIENCY (Typ.)	88%	88%	90%	90%	91%	91%	91%		
	AC CURRENT (Typ.)	2A / 115VAC	1A / 230VAC	0.68A / 277VAC	0070	0170	0170	0170		
	INRUSH CURRENT(max.)				k) at 230\/AC					
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	COLD START 65A(twidth=595 µs measured at 50% Ipeak) at 230VAC  3 units (circuit breaker of type B) / 5 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<1mA / 240VAC								
	LEARAGE CORRECT									
	OVER CURRENT (Typ.) Note.4	95 ~ 108%  Protection type: Constant surrent limiting, receivers outsmatically after fault condition in removed.								
PROTECTION	SHORT CIRCUIT	Protection type: Constant current limiting, recovers automatically after fault condition is removed								
	SHOKI CIKCUII	Hiccup mode, recovers automatically after fault condition is removed  13.5 ~ 17V								
	OVER VOLTAGE			1	e-power on to recov		42 JUV	59 ~ 70V		
	OVED TEMPEDATURE				e-power on to recov	eı				
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover								
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)								
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
	SAFETY STANDARDS Note.7	UL8750, CSA C22.2 No. 250.0-08, UL1012, CAN/CSA-C22.2 No. 107.1-01, UL879, CSA C22.2 No. 207-M89, EN61347-1, EN61347-2-1 independent(except for CLG-150 C type). UL60950-1, TUV EN60950-1, GB19510.1, GB19510.14(for Blank & A type only).								
		IP65 or IP67, J61347-1, J61347-2-13 (except for CLG-150 C type), EAC TP TC 004 approved								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC								
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION	Compliance to EN55015, EN55032 Class B, EN61000-3-2 Class C (≥75% load); EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020								
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), EAC TP TC 020								
OTHERS	MTBF	303.7K hrs min. MIL-HDBK-217F (25°C)								
	DIMENSION	222.2*68*38.8mm (L*W*H)(CLG-150-Blank/A/B) 229*68*38.8mm (L*W*H)(CLG-150-C)								
	PACKING		, ,,	,						
NOTE	All parameters NOT speciall     Ripple & noise are measure     Tolerance: includes set up     Please refer to "DRIVING     Derating may be needed un     A type and C type only.     Safety and EMC design refer	1.0Kg; 12pcs/13Kg/0.58CUFT(CLG-150-Blank/A/B)  1Kg; 12pcs/13Kg/0.96CUFT(CLG-150-C)  ly mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.  2d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  3 toterance, line regulation and load regulation.  METHODS OF LED MODULE".  3 der low input voltages. Please check the static characteristics for more details.  2er to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18.  2er da a component that will be operated in combination with final equipment. Since EMC performance will be affected by the								

6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

2. To fulfill requirements of the lettert EMP regulation for lighting fixtures, this LEMP requirements of the lettert EMP regulation for lighting fixtures, this LEMP requirements are the lettert.

To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.



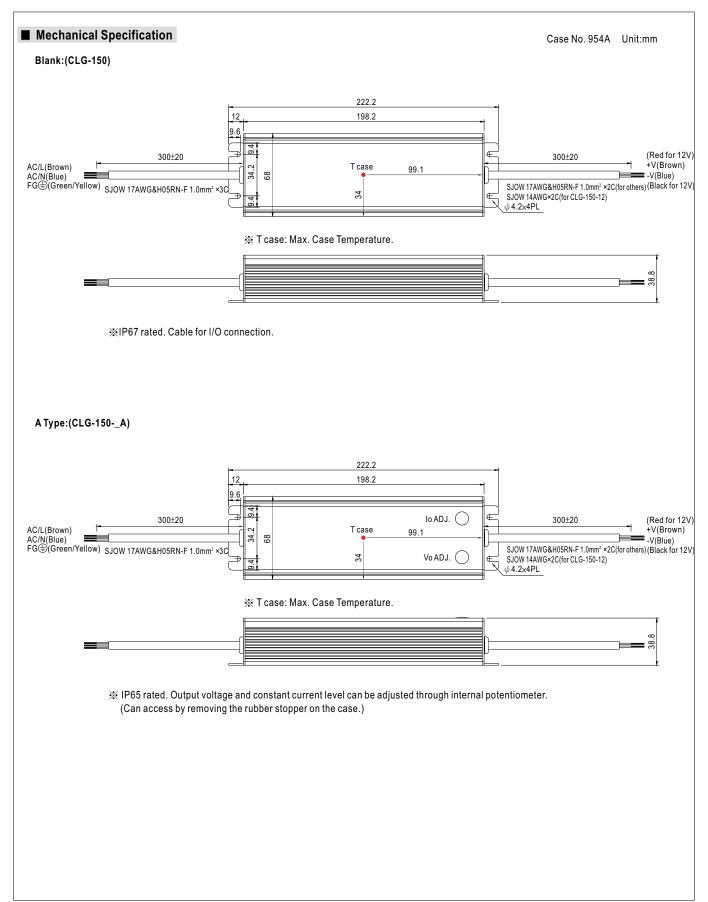




# 

- 💥 IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistor between ADJ1 and ADJ2.
- \* Reference resistance value for output current adjustment (Typical)

Resistance	Percentage of rated current
Open	Slightly > 100%
4.7ΚΩ	100%
620 Ω	75%
82Ω	50%
Short	Slightly < 50%

## C Type:(CLG-150-\_C)

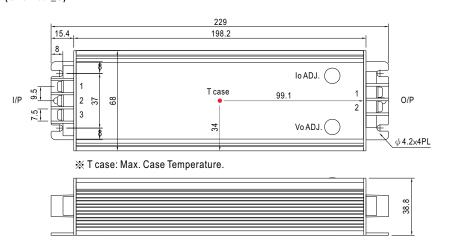

※ Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


# AC Input Terminal Pin No. Assignment

•	
Pin No.	Assignment
1	FG ±
2	AC/N
3	AC/L

### DC Output Terminal Pin No. Assignment


Pin No.	Assignment
1	+V
2	-V



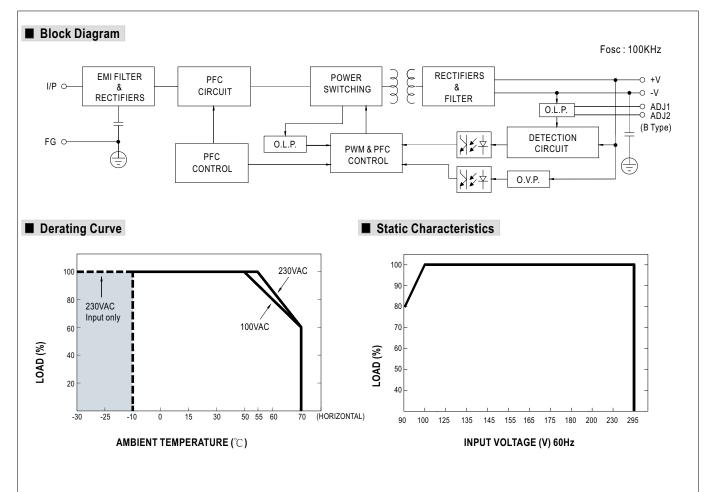




### **■** Power Factor Characteristic

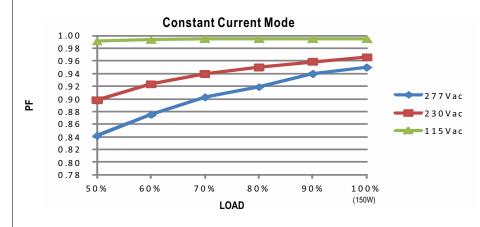

# ■ EFFICIENCY vs LOAD (48V Model)

CLG-150 series possess superior working efficiency that up to 91% can be reached in field applications.

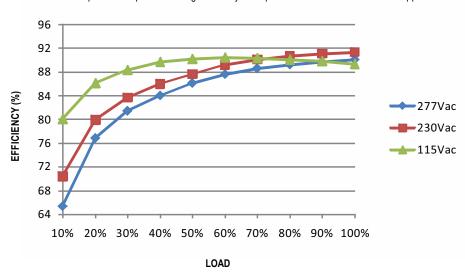


### ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].

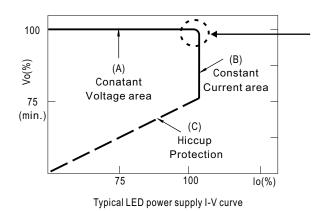

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.