

4850, 7-pole, Plug, solder terminal, DIN Plug/Socket



Description


- Solder terminal :
for cable mounting
- DIN Plug: 7-pole , straight

Technical Data



Diameter	9.0 mm	Allowable Operation Temperature	-20°C to 70°C
Number of Poles	7-pole	Terminal	solder terminal silver plated
Ratings DC	2A / 12VDC	Lifetime	5000 Insertions
Ratings AC	1A / 100VAC		
Dielectric Strength	250VAC		
Insulation Resistance	> 50 MΩ @ 250VDC		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions



Cable diameter max. 5.0 mm

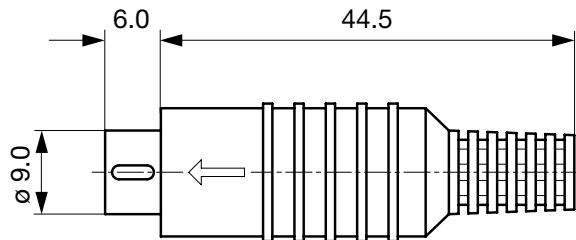

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DIN Plug/Socket	9.0	7-pole	solder terminal	4850.1710

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[DIN Plug/Socket Overview complete](#)

4850, 7-pole, Socket, PCB terminals, DIN Plug/Socket 4850.2710

4850, 7-pole, Line Socket, solder terminal, DIN Plug/Socket 4850.3700

[DIN Plug/Socket further types to 4850.1710](#)