



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Features

- Low gate charge
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant
- Halogen free package
- JEDEC Qualification

$$V_{DSS} = 880 \text{ V @ } T_{jmax}$$

$$I_D = 9.5 \text{ A}$$

$$R_{DS(ON)} = 1.05 \Omega(\text{max}) @ V_{GS} = 10 \text{ V}$$

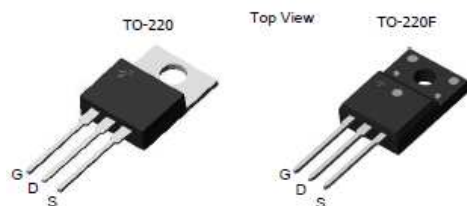

Device	Package	Marking	Remark
GP1M010A080H	TO-220	GP1M010A080H	RoHS
GP1M010A080FH	TO-220F	GP1M010A080FH	Halogen Free

Absolute Maximum Ratings

Parameter	Symbol	GP1M010A080H	GP1M010A080FH	Unit
Drain-Source Voltage	V_{DSS}	800		V
Gate-Source Voltage	V_{GS}	± 30		V
Continuous Drain Current	$T_C = 25^\circ \text{C}$	9.5	9.5 *	A
	$T_C = 100^\circ \text{C}$	6.4	6.4 *	A
Pulsed Drain Current (Note 1)	I_{DM}	38	38*	A
Single Pulse Avalanche Energy (Note 2)	E_{AS}	917		mJ
Repetitive Avalanche Current (Note 1)	I_{AR}	9.5		A
Repetitive Avalanche Energy (Note 1)	E_{AR}	29		mJ
Power Dissipation	$T_C = 25^\circ \text{C}$	290	48	W
	Derate above 25°C	2.32	0.38	W/°C
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5		V/ns
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~150		°C
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	T_L	300		°C

* Limited only by maximum junction temperature

Thermal Characteristics







Parameter	Symbol	GP1M010A080H	GP1M010A080FH	Unit
Maximum Thermal resistance, Junction-to-Case	$R_{\theta JC}$	0.43	2.6	°C/W
Maximum Thermal resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	62.5	°C/W





Electrical Characteristics : $T_C=25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Test condition	Min	Typ	Max	Units
OFF						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0 V, I _D = 250 μA	800	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 800 V, V _{GS} = 0 V	--	--	10	μA
		V _{DS} = 640 V, T _C = 125°C	--	--	100	μA
Forward Gate-Source Leakage Current	I _{GSSF}	V _{GS} = 30 V, V _{DS} = 0 V	--	--	100	nA
Reverse Gate-Source Leakage Current	I _{GSSR}	V _{GS} = -30 V, V _{DS} = 0 V	--	--	-100	nA
ON						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	2	--	4	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 10 V, I _D = 4.75 A	--	0.9	1.05	Ω
Forward Transconductance ^(Note 4)	g _{FS}	V _{DS} = 30 V, I _D = 4.75 A	--	6.3	--	S
DYNAMIC						
Input Capacitance	C _{iss}	V _{DS} = 25 V, V _{GS} = 0 V, f = 1.0 MHz	--	2336	--	pF
Output Capacitance	C _{oss}		--	214	--	pF
Reverse Transfer Capacitance	C _{rss}		--	29	--	pF
SWITCHING						
Turn-On Delay Time ^(Note 4,5)	t _{d(on)}	V _{DD} = 400 V, I _D = 9.5 A, R _G = 25 Ω	--	63	--	ns
Turn-On Rise Time ^(Note 4,5)	t _r		--	62	--	ns
Turn-Off Delay Time ^(Note 4,5)	t _{d(off)}		--	256	--	ns
Turn-Off Fall Time ^(Note 4,5)	t _f		--	72	--	ns
Total Gate Charge ^(Note 4,5)	Q _g	V _{DS} = 640V, I _D = 9.5 A, V _{GS} = 10 V	--	53	--	nC
Gate-Source Charge ^(Note 4,5)	Q _{gs}		--	10	--	nC
Gate-Drain Charge ^(Note 4,5)	Q _{gd}		--	22.3	--	nC
SOURCE DRAIN DIODE						
Maximum Continuous Drain-Source Diode Forward Current	I _S	---	--	--	9.5	A
Maximum Pulsed Drain-Source Diode Forward Current	I _{SM}	---	--	--	38	A
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} = 0 V, I _S = 9.5 A	--	--	1.5	V
Reverse Recovery Time ^(Note 4)	t _{rr}	V _{GS} = 0 V, I _S = 9.5 A dI _F / dt = 100 A/μs	--	453	--	ns
Reverse Recovery Charge ^(Note 4)	Q _{rr}		--	5.3	--	μC


Note :

1. Repeated rating : Pulse width limited by safe operating area
2. $L=17.2\text{mH}$, $I_{AS} = 9.5\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{SD} \leq 9.5\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DS}$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially Independent of Operating Temperature Typical Characteristics

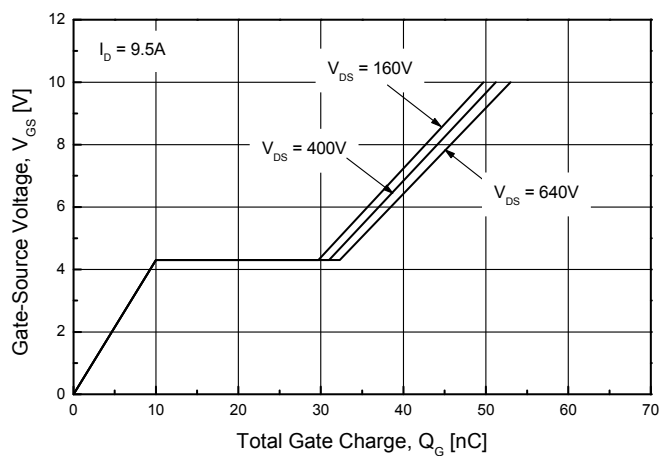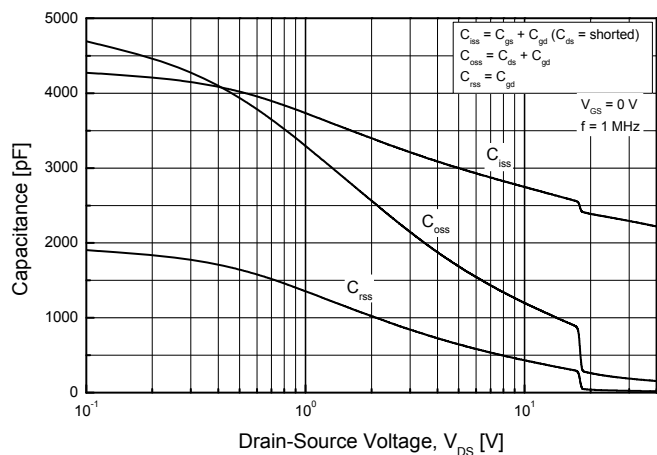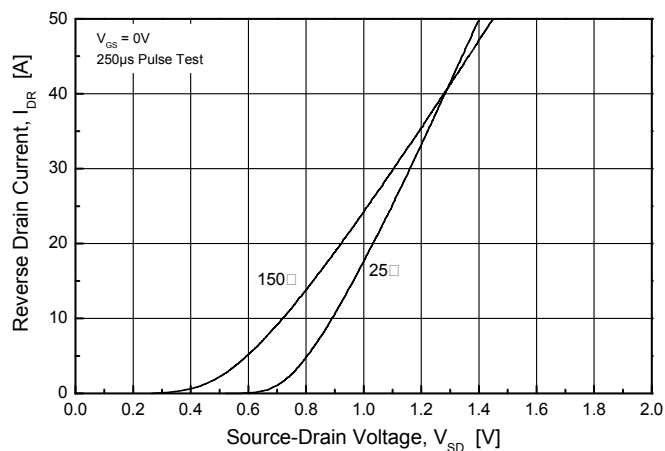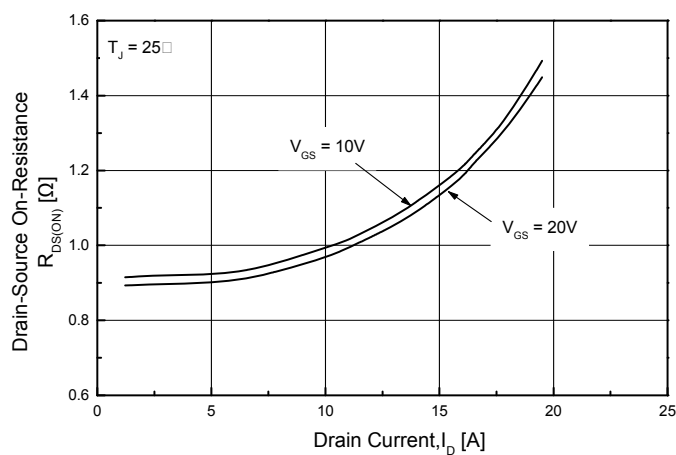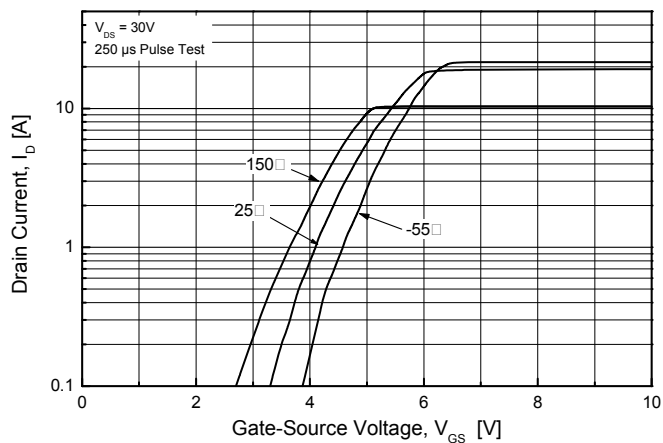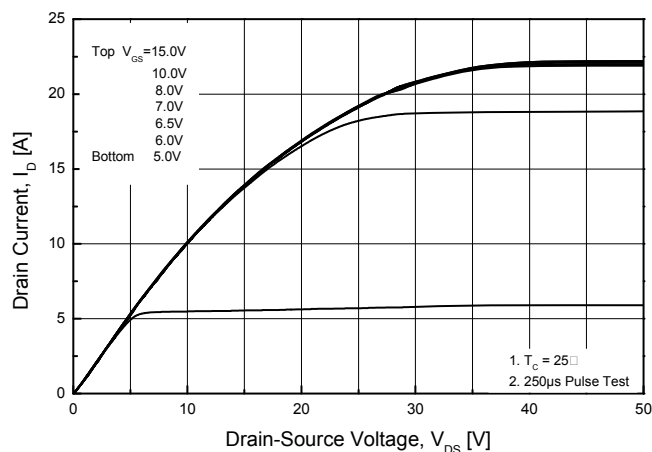


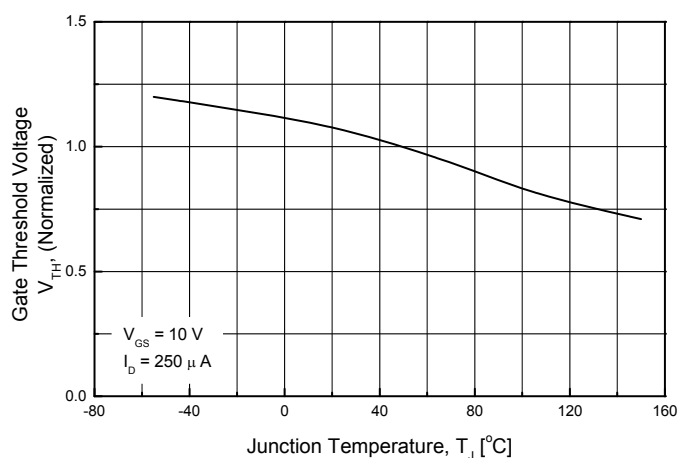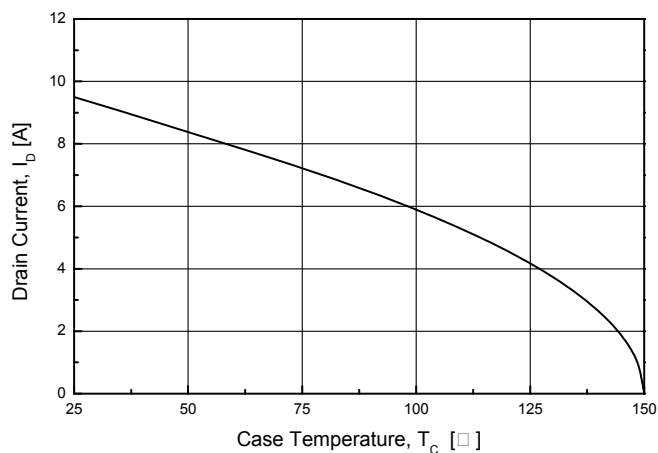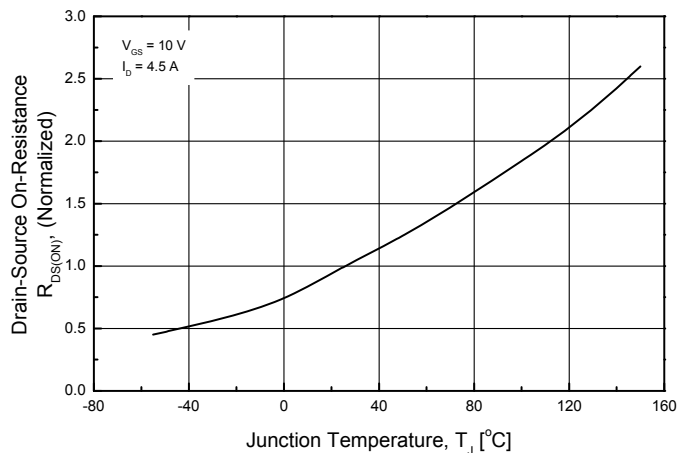
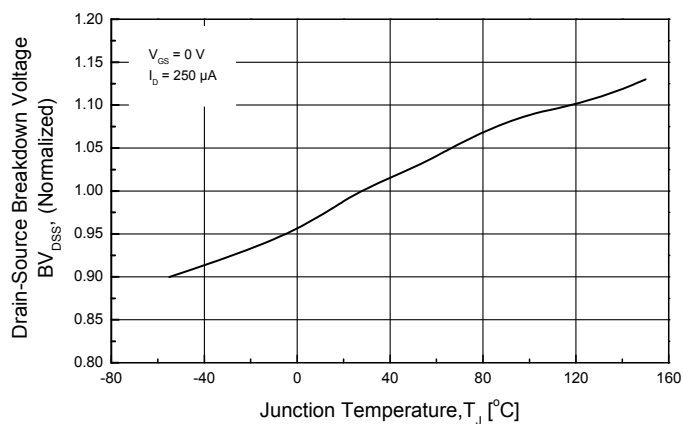


GP1M010A080H

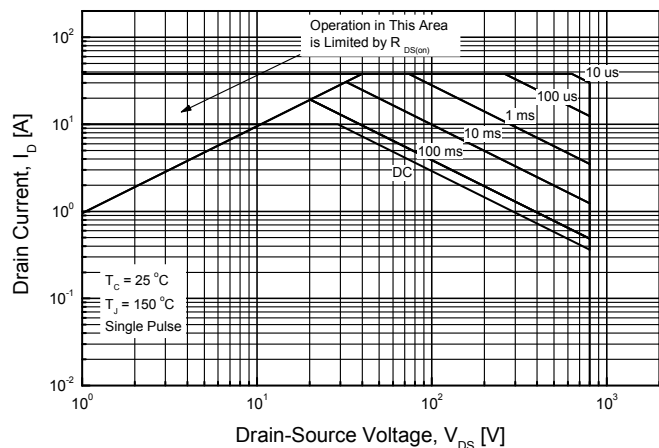


GP1M010A080FH

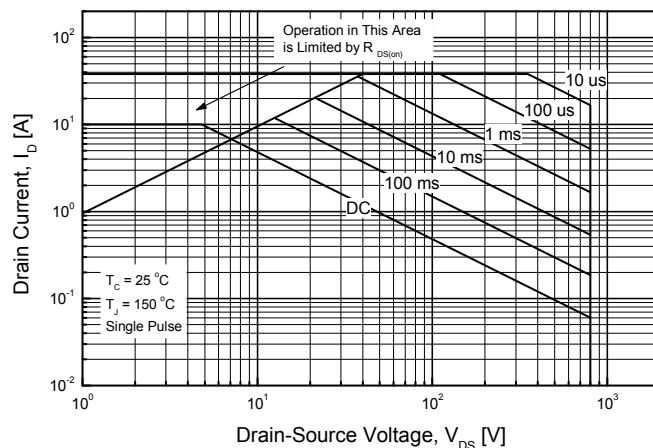

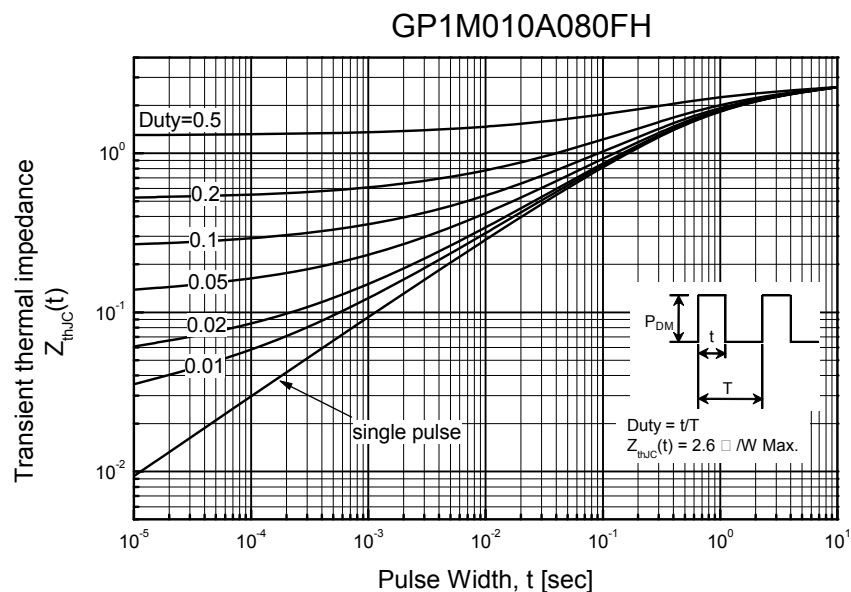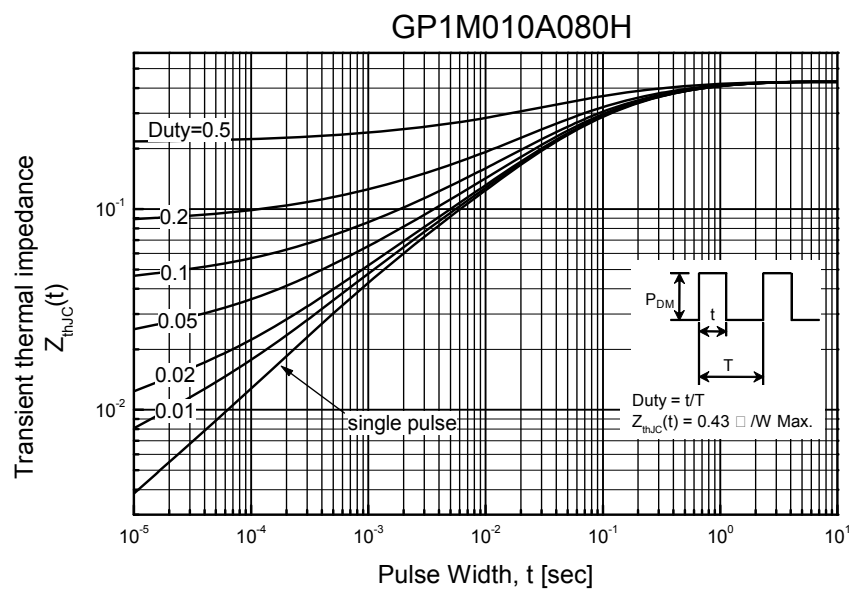


TO-220AB-3L MECHANICAL DATA

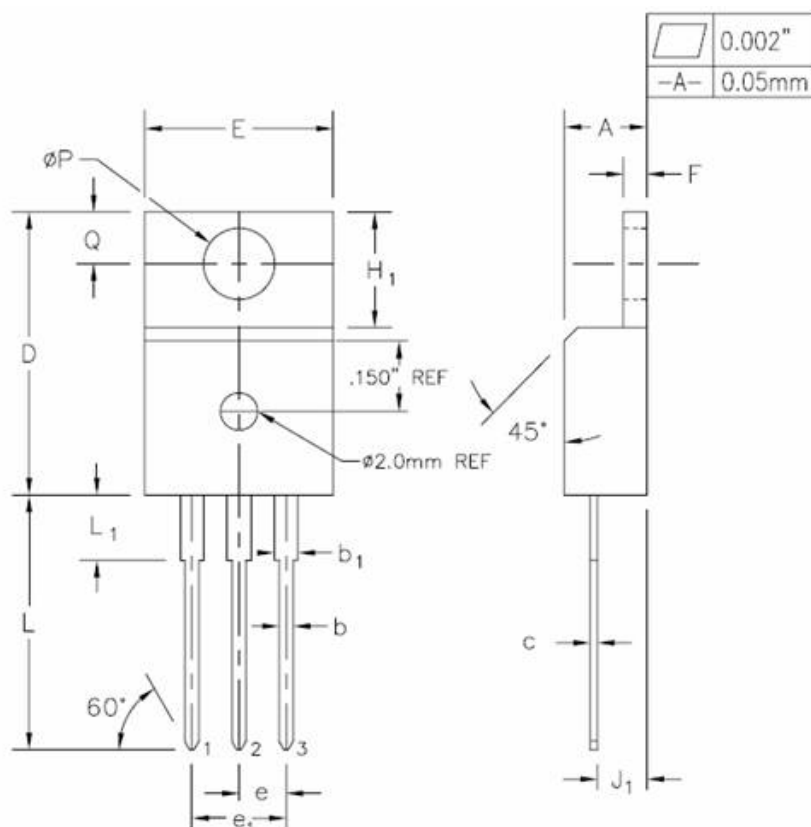

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	0.170	0.180	4.32	4.57	
b	0.028	0.036	0.71	0.91	
b ₁	0.045	0.055	1.15	1.39	
c	0.014	0.021	0.36	0.53	
D	0.590	0.610	14.99	15.49	
E	0.395	0.410	10.04	10.41	
e	0.100 TYP.		2.54 TYP.		
e ₁	0.200 BSC		5.08 BSC		
F	0.048	0.054	1.22	1.37	
H ₁	0.235	0.255	5.97	6.47	
J ₁	0.100	0.110	2.54	2.79	
L	0.530	0.550	13.47	13.97	
L ₁	0.130	0.150	3.31	3.81	2
ϕP	0.149	0.153	3.79	3.88	
Q	0.102	0.112	2.60	2.84	

TO-220F-3L MECHANICAL DATA

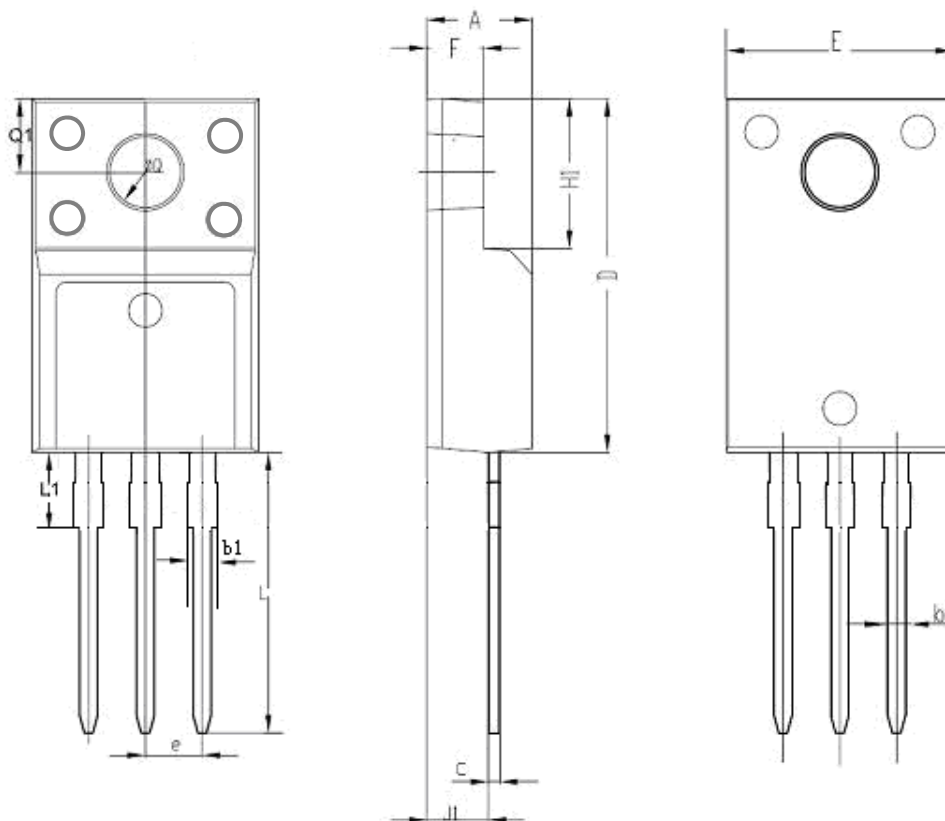

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.178	0.194	4.53	4.93	
b	0.028	0.036	0.71	0.91	
C	0.018	0.024	0.45	0.60	
D	0.617	0.633	15.67	16.07	
E	0.392	0.408	9.96	10.36	
e	0.100 TYP.		2.54TYP.		
H1	0.256	0.272	6.50	6.90	
J1	0.101	0.117	2.56	2.96	
L	0.503	0.519	12.78	13.18	
φQ	0.117	0.133	2.98	3.38	
b1	0.045	0.055	1.15	1.39	
L1	0.114	0.130	2.9	3.3	
Q1	0.122	0.138	3.10	3.50	
F	0.092	0.108	2.34	2.74	

Disclaimer :

Global Power Technologies Group reserves the right to make changes without notice to products herein to improve reliability, performance, or design. The information given in this document is believed to be accurate and reliable. However, it shall in no event be regarded as a guarantee of conditions and characteristics. With respect to any information regarding the application of the device, Global Power Technologies Group hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of patent rights of any third party.