



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

82A6025

TITLE

FOUR CONDUCTOR CABLE, DOUBLE SHIELDED,
JACKETED, LIGHTWEIGHT, FLEXIBLE

Date

03-25-04

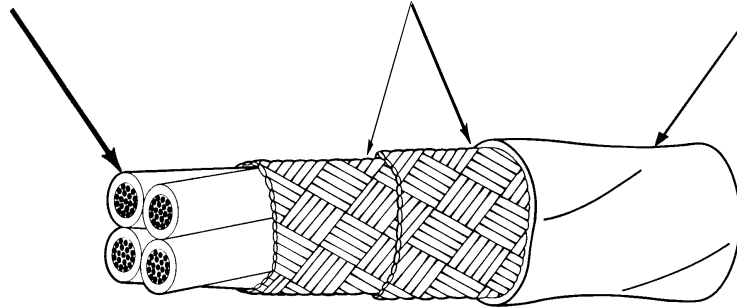
Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 80.

COMPONENT WIRES - 82A0111

SHIELDS - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED FLEXIBLE ETFE

CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	INNER SHIELD SIZE (AWG)	OUTER SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lb/1000 ft)
				MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
82A6025-22-*	22	38	38	.007	.010	.158	.171	28.0

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hour,

15 in. specimen with sufficient weight to keep straight

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 100% (minimum)

Tensile Strength, 3000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1500 volts (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum) (each)

SHIELD ANGLE: 26° minimum, 30° maximum (each)

VOLTAGE WITHSTAND (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER

The "*" in the part number above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

1/ Example: AWG 20, white, black, red and yellow component wires; white jacket:
82A6025-20-9/0/2/4-9

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.

Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable
501 Oakside Avenue
Redwood City, CA 94063-3800
Phone: 1-800-227-8816
Fax: 1-650-361-6297