



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Sensor/actuator cable - SAC-4P-20,0-PUR/M12FS - 1500224


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, cable length: 20 m

RoHS

### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 STK   |
| GTIN         | <br>4 017918 584788 |
| GTIN         | 4017918584788   |
| Sales Key    | 02  |

### Technical data

#### Dimensions

|  |       |
|--|-------|
| Length of cable                            | 20 m  |
| Stripping length of the free conductor end | 50 mm |

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |              |
|-----------------------|--------------|
| Rated current at 40°C | 4 A          |
| Rated voltage         | 250 V AC     |
|                       | 250 V DC     |
| Number of positions   | 4            |
| Insulation resistance | ≥ 100 MΩ     |
| Coding                | A - standard |
| Status display        | No           |
| Overvoltage category  | II           |

# Sensor/actuator cable - SAC-4P-20,0-PUR/M12FS - 1500224

## Technical data

### General

|                             |       |
|-----------------------------|-------|
| Degree of pollution         | 3     |
| Insertion/withdrawal cycles | ≥ 100 |

### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |
| Sealing material                       | NBR   |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

### Cable

|   |                            |
|---|----------------------------|
| Cable type                                      | PUR halogen-free black     |
| Cable type (abbreviation)                       | PUR                        |
| Cable abbreviation                              | Li9Y11Y-HF                 |
| UL AWM style                                    | 20549 / 10493 (80°C/300 V) |
| Conductor cross section                         | 4x 0.34 mm²                |
| AWG signal line                                 | 22                         |
| Conductor structure signal line                 | 42x 0.10 mm                |
| Core diameter including insulation              | 1.27 mm ±0.02 mm           |
| Thickness, insulation                           | ≥ 0.21 mm                  |
| Wire colors                                     | brown, white, blue, black  |
| Overall twist                                   | 4 wires, twisted           |
| External sheath, color                          | black-gray RAL 7021        |
| Outer sheath thickness                          | approx. 0.5 mm             |
| External cable diameter D                       | 4.2 mm ±0.15 mm            |
| Minimum bending radius, fixed installation      | 5 x D                      |
| Minimum bending radius, flexible installation   | 10 x D                     |
| Number of bending cycles                        | 10000000                   |
| Minimum bending radius, drag chain applications | 10 x D                     |
| Traversing path                                 | 10 m                       |
| Traversing rate                                 | 3 m/s                      |
| Acceleration                                    | 10 m/s²                    |
| Cable weight                                    | 30 kg/km                   |
| Outer sheath, material                          | PUR                        |
| Material conductor insulation                   | PP                         |
| Conductor material                              | Bare Cu litz wires         |
| Insulation resistance                           | ≥ 1 GΩ*km                  |

## Sensor/actuator cable - SAC-4P-20,0-PUR/M12FS - 1500224

### Technical data

#### Cable


|                                 |   |
|---------------------------------|---|
| Conductor resistance            | ≤ 58 Ω/km   |
| Nominal voltage, cable          | ≤ 300 V   |
| Test voltage, cable             | ≥ 3000 V  |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free   |
|                                 | Free of substances which would hinder coating with paint or varnish |
|                                 | flexible  |
| Flame resistance                | in accordance with UL 758/1581 FT2                                  |
|                                 | DIN EN 60332-2-2 (20 s)   |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
|                                 | in accordance with DIN EN 50267-2-1                                 |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
|                                 | Low adhesion  |
|                                 | abrasion-resistant  |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


### Drawings

Schematic diagram



Pin assignment M12 socket, 4-pos., A-coded,  
view female side

Dimensional drawing

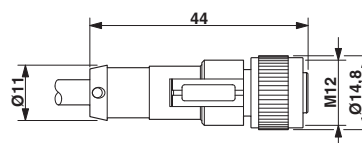


M12 x 1 socket, straight



# Sensor/actuator cable - SAC-4P-20,0-PUR/M12FS - 1500224

Circuit diagram

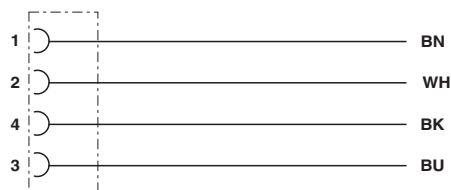

Contact assignment of the M12 socket

## Approvals


### Approvals


Approvals

UL Listed / cUL Listed / EAC / cULus Listed


Ex Approvals

### Approval details

|                    |   |   |               |
|--------------------|---|---|---------------|
| UL Listed          |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |   | 300 V   |               |
| Nominal current IN |   | 4 A   |               |

|                    |   |   |               |
|--------------------|---|---|---------------|
| cUL Listed         |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |   | 300 V   |               |
| Nominal current IN |   | 4 A   |               |

|     |   |               |
|-----|---|---------------|
| EAC |  | EAC-Zulassung |
|-----|---|---------------|

|              |   |
|--------------|---|
| cULus Listed |  |
|--------------|---|

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>