



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





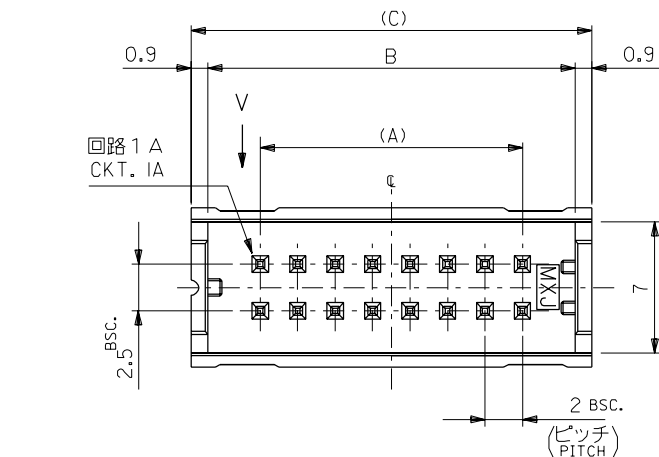


回路 1 A 表示
CKT. 1A IDENTIFICATION



V

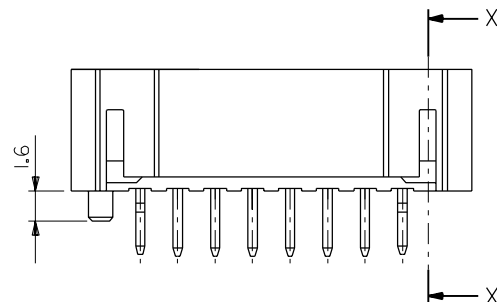

X-X

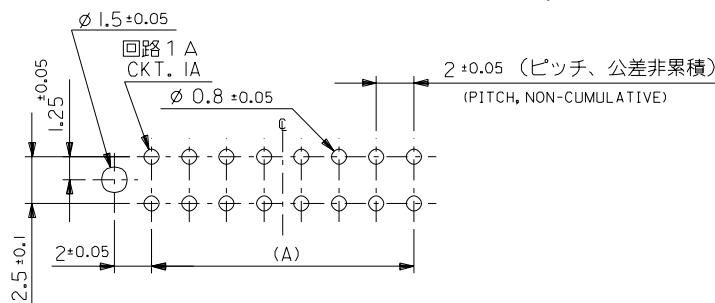

基板取付穴推奨寸法 (参考)
RECOMMENDED PCB HOLE DIM.(REF.)

注記 NOTES

- 材料 : ハウジング : ガラス入りポリエステル
MATERIALS: HOUSING : G.F. POLYESTER, UL94V-0, GRAY
ピン : 黄銅
PIN : BRASS (0.5mm, SQUARE)
- 仕上げ : Sn-Pbメッキ : 2-3 μm
PLATING : TIN-LEAD : 2-3 μm
銅下地メッキ : 1-2 μm
OVER COPPER : 1-2 μm
- 適合メスコネクター : 51089-***5, 52478-***15, 52484-***15
MATING CONNECTORS : 51089-***5, 52478-***15, 52484-***15
適合フリップ : 51094-***00
CLIP : 51094-***00
- 推奨基板厚 :
RECOMMENDED PCB THICKNESS : t=1.6mm

65.4	63.6	58	53313-6015	60
55.4	53.6	48	-5015	50
45.4	43.6	38	-4015	40
39.4	37.6	32	-3415	34
35.4	33.6	28	-3015	30
33.4	31.6	26	-2815	28
31.4	29.6	24	-2615	26
29.4	27.6	22	-2415	24
27.4	25.6	20	-2215	22
25.4	23.6	18	-2015	20
23.4	21.6	16	-1815	18
21.4	19.6	14	-1615	16
19.4	17.6	12	-1415	14
17.4	15.6	10	-1215	12
15.4	13.6	8	-1015	10
13.4	11.6	6	-0815	8
11.4	9.6	4	53313-0615	6
(C)	B	A	ENG. NO.	CKT.

C	変更 (T4011B)	1.4	94/3/2
B	変更 (T20497)	1.4	92/11/25
A	RELEASED	GMS	91/7/30
2	REVISIONS	GMS	91/3/5
1	REVISIONS	GMS	90/11/6
0	新規作成	DR	CHK
記号	変更内容	DR	CHK
LTR	REVISION RECORD	DR	CHK
一般公差	REVISION RECORD	DR	CHK
GENERAL TOLERANCES	REVISION RECORD	DR	CHK

材料	注記参照	SEE NOTES
仕上げ	注記参照	SEE NOTES
FINISH	注記参照	SEE NOTES
適用電線範囲	注記参照	SEE NOTES
WIRE RANGE	注記参照	SEE NOTES
被覆外径	注記参照	SEE NOTES
INS. RANGE	注記参照	SEE NOTES
DRAWN BY	CHK'D BY	DATE
APP'D BY	CHK'D BY	DATE
尺度	SCALE	4-1

MOLEX JAPAN CO., LTD.	日本モレックス株式会社
EDP. NO.	#
ENG. NO.	SD-53313-**-15
REV	C
TITLE 名称	2-mm W-T-O-B DUAL ROW STRAIGHT HEADER ASS'Y.